


DVA-G3670B - Engin VoIP Configuration

1. Log in to the DVA-G3670B configuration page using your web browser e.g. Internet Explorer or Mozilla Firefox – default address is <http://192.168.1.1>
2. Enter the Username and Password (default: **admin**)

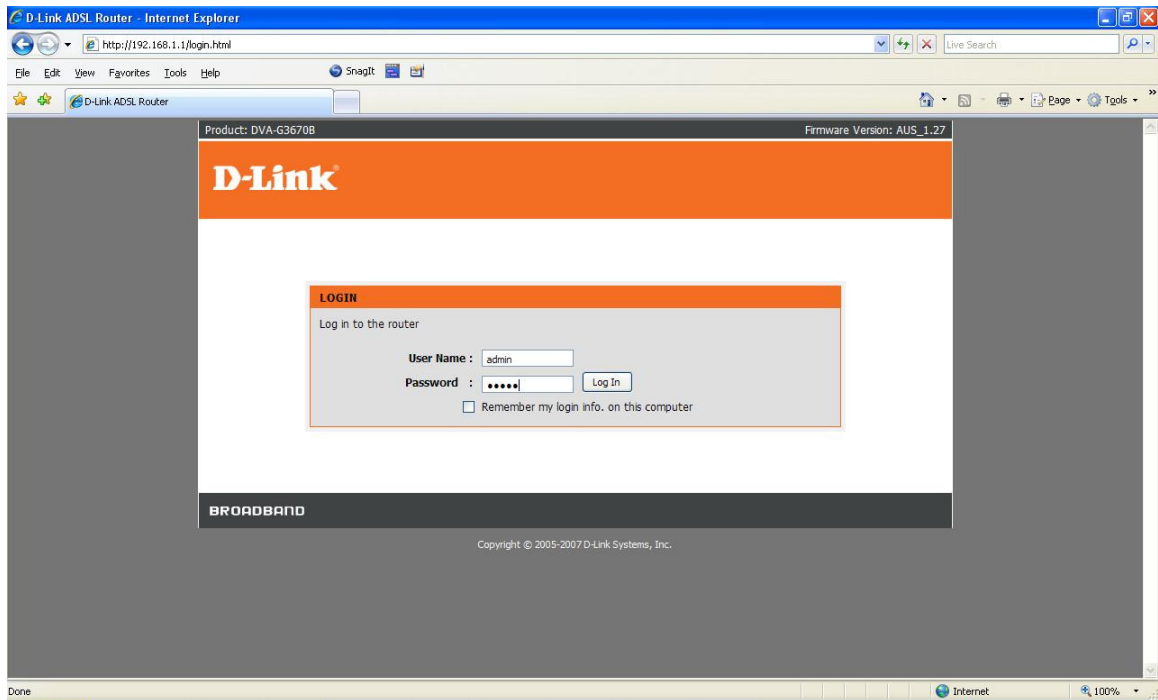

3. Once logged in, select the **VOICE** button in the top menu

The screenshot shows the D-Link web interface for product DVA-G3670B. At the top, it displays 'Product Page: DVA-G3670B' and 'Firmware Version: AUS_1.27'. The D-Link logo is prominently displayed. Below the logo is a navigation menu with tabs for 'DVA-G3670B //', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'VOICE' tab is highlighted with a red circle. On the left side, there is a sidebar menu with options like 'Wizard', 'Internet Setup', 'Wireless Settings', 'Local Network', 'Time and Date', and 'Logout'. The main content area is titled 'SETTING UP YOUR INTERNET' and contains instructions on how to set up an Internet connection, including a 'Setup Wizard' button. A 'Helpful Hints...' section on the right provides additional guidance for new users and advanced users.

4. Select the 'Add Account' button to add a new VoIP account

The screenshot shows the D-Link web interface for product DVA-G3670B, now with the 'VOICE' menu selected. The top navigation bar shows 'DVA-G3670B //', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'VOICE' tab is highlighted with a red circle. The left sidebar menu includes 'Voip Account', 'Pstn Connection', 'Line Settings', 'Prefix Rules', 'Call Waiting', 'Incoming Call Policy', 'Peer to Peer', 'Telephony Setup', and 'Logout'. The main content area is titled 'VOIP ACCOUNT' and contains the instruction 'Use this table to add or modify your VOIP service account.' Below this is a table with columns for 'SIP number', 'Registrar server', 'Priority', and 'Edit/Delete'. An 'Add Account' button is located below the table and is highlighted with a red circle. A 'Helpful Hints...' section on the right states '10 voip accounts can be added here.' and includes a 'More...' link.

5. Enter the Engin VoIP account settings provided to you by Engin.

- **SIP number:** Your Engin VoIP phone number
- **Auth name:** Your Engin VoIP phone number
- **Password:** the password associated with the VoIP account (provided by Engin).
- **Registrar/Proxy:** `syd.byo.engin.com.au` (depending on the city you are from).

6. Leave the other settings as default and click the **APPLY** button

The screenshot shows the D-Link web interface for the DVA-G3670B device. The top navigation bar includes 'Product Page: DVA-G3670B', 'Site Map', and 'Firmware Version: AUS_1.27'. The main header features the D-Link logo. Below the header is a navigation menu with tabs for 'DVA-G3670B', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'VOICE' tab is selected, and the 'Voip Account' sub-tab is active. The main content area is titled 'VOIP ACCOUNT' and contains the following text: 'Use this section to configure your VOIP service provider information.' Below this is a section titled 'ADD NEW VOIP ACCOUNT' with the following fields and options:

- SIP number:** 0280022773
- Auth name:** 0280022773
- Password:** [masked]
- Password confirm:** [masked]
- Use DNS SRV:**
- Registrar/Proxy:** syd.byo.engin.com.au
- Port:** 5060
- Use Domain to Register:**
- Priority:** 0

At the bottom of the form, there are two buttons: 'Apply' (circled in red) and 'Cancel'. On the right side of the interface, there is a 'Helpful Hints...' section with the text: '10 voip accounts can be added here. More...'

7. Your account list should now be displayed with the entry you created. Click the **MAINTENANCE** button in the top menu.

The screenshot shows the D-Link web interface for the DVA-G3670B. The top navigation bar includes 'Product Page: DVA-G3670B', 'Site Map', and 'Firmware Version: AUS_1.27'. The main header features the D-Link logo. Below the header is a navigation menu with tabs for 'DVA-G3670B', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'MAINTENANCE' tab is highlighted with a red circle. The left sidebar contains a list of menu items: 'Voip Account', 'Pstn Connection', 'Line Settings', 'Prefix Rules', 'Call Waiting', 'Incoming Call Policy', 'Peer to Peer', 'Telephony Setup', and 'Logout'. The main content area is titled 'VOIP ACCOUNT' and contains the text: 'Use this table to add or modify your VOIP service account.' Below this is a section titled 'ACCOUNT LISTS' with a table:

SIP number	Registrar server	Priority	Edit/Delete
0280022773	syd.byo.engin.com.au	0	<input type="button" value="Edit/Delete"/>

Below the table is an 'Add Account' button. On the right side, there is a 'Helpful Hints...' section with the text: '10 voip accounts can be added here.' and a 'More...' link.

8. Click the **REBOOT** button to save the changes and reboot the modem.

The screenshot shows the D-Link web interface for the DVA-G3670B. The top navigation bar includes 'Product Page: DVA-G3670B', 'Site Map', and 'Firmware Version: AUS_1.27'. The main header features the D-Link logo. Below the header is a navigation menu with tabs for 'DVA-G3670B', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'MAINTENANCE' tab is highlighted with a red circle. The left sidebar contains a list of menu items: 'System', 'Firmware Update', 'Access Controls', 'Diagnostics', 'System Log', and 'Logout'. The main content area is titled 'SYSTEM -- REBOOT' and contains the text: 'Click the button below to reboot the router.' Below this is a 'Reboot' button, which is highlighted with a red circle. Below the 'Reboot' button is a section titled 'SYSTEM -- BACKUP SETTINGS' with the text: 'Backup DSL Router configurations. You may save your router configurations to a file on your PC.' and a note: 'Note: Please always save configuration file first before viewing it.' Below this is a 'Backup Settings' button. On the right side, there is a 'Helpful Hints...' section with the text: 'This page allows you to reboot your router or save your router configuration to a file on your computer as a precaution in case you have to reset your router to factory default settings. You will be able to restore your router settings from a previously saved configuration file. There is also a function to allow you to reset your router to factory default settings. Resetting your router to factory default settings will erase your current configuration.'

8. Once the device has rebooted, log back in to the configuration and select the STATUS button in the top menu, followed by VOICE in the left menu to check the STATUS of your VoIP service.

Note: Once the modem is rebooted, it may take up to 3 minutes for the ADSL and VoIP service to connect. Please ensure that the Internet is active once the reboot has completed.

Another way to check if the modem has registered to the VoIP provider is by checking if the VoIP lights (1 and 2) are active on the front panel of the DVA-G3670B.

