


DVA-G3670B - iiNet VoIP Configuration

1. Log in to the DVA-G3670B configuration page using your web browser e.g. Internet Explorer or Mozilla Firefox – default address is <http://192.168.1.1>
2. Enter the Username and Password (default: **admin**)

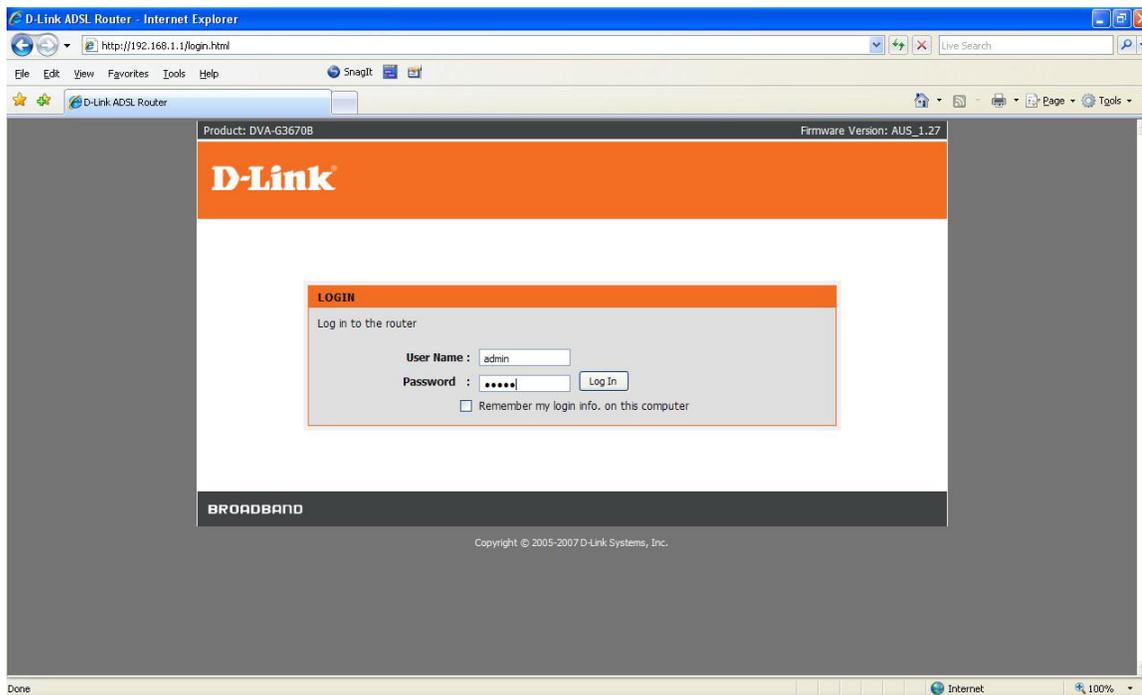

3. Once logged in, select the **VOICE** button in the top menu

The screenshot shows the D-Link web interface for product DVA-G3670B. The top navigation bar includes 'DVA-G3670B //', 'SETUP', 'ADVANCED', 'VOICE' (highlighted with a red circle), 'MAINTENANCE', 'STATUS', and 'HELP'. The main content area is titled 'SETTING UP YOUR INTERNET' and contains instructions for setting up an Internet connection, including a 'Setup Wizard' button. A 'Helpful Hints...' sidebar is visible on the right.

4. Select the 'Add Account' button to add a new VoIP account

The screenshot shows the D-Link web interface for product DVA-G3670B. The top navigation bar includes 'DVA-G3670B //', 'SETUP', 'ADVANCED', 'VOICE' (highlighted with a red circle), 'MAINTENANCE', 'STATUS', and 'HELP'. The main content area is titled 'VOIP ACCOUNT' and contains instructions for adding or modifying a VoIP service account. Below this, there is a table with columns for 'SIP number', 'Registrar server', 'Priority', and 'Edit/Delete'. An 'Add Account' button is highlighted with a red circle. A 'Helpful Hints...' sidebar is visible on the right.

5. Enter the iiNet VoIP account settings provided to you by iiNet.
 - **SIP number:** Your iiNet VoIP phone number
 - **Auth name:** Your iiNet VoIP phone number
 - **Password:** the password associated with the VoIP account (provided by iiNet).
 - **Registrar/Proxy:** sip.nsw.iinet.net.au (depending on the state you are from).
6. Leave the other settings as default and click the **APPLY** button

The screenshot shows the D-Link web interface for the DVA-G3670B device. The top navigation bar includes 'Product Page: DVA-G3670B', 'Site Map', and 'Firmware Version: AUS_1.27'. The main header features the D-Link logo. Below this is a navigation menu with tabs for 'DVA-G3670B', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'VOICE' tab is selected, leading to the 'VOIP ACCOUNT' configuration page. The page title is 'DVA-G3670B // VOIP ACCOUNT'. A sub-header reads 'VOIP ACCOUNT' and a note states 'Use this section to configure your VOIP service provider information.' Below this is a section titled 'ADD NEW VOIP ACCOUNT' containing the following fields and options:

- SIP number:** 0286622331
- Auth name:** 0286622331
- Password:** [masked]
- Password confirm:** [masked]
- Use DNS SRV:**
- Registrar/Proxy:** sip.nsw.iinet.net.au
- Port:** 5060
- Use Domain to Register:**
- Priority:** 0

At the bottom of the form, there are two buttons: 'Apply' (circled in red) and 'Cancel'.

7. Your account list should now be displayed with the entry you created. Click the **MAINTENANCE** button in the top menu.

The screenshot shows the D-Link router web interface. At the top, it displays 'Product Page: DVA-G3670B' and 'Firmware Version: AUS_1.27'. The D-Link logo is prominently displayed. Below the logo is a navigation menu with tabs for 'DVA-G3670B', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'MAINTENANCE' tab is highlighted with a red circle. On the left side, there is a sidebar menu with options like 'Voip Account', 'Pstn Connection', 'Line Settings', 'Prefix Rules', 'Call Waiting', 'Incoming Call Policy', 'Peer to Peer', 'Telephony Setup', and 'Logout'. The main content area is titled 'VOIP ACCOUNT' and contains a table with the following data:

SIP number	Registrar server	Priority	Edit/Delete
0286622331	sip.nsw.linnet.net.au	0	<input type="button" value="Edit/Delete"/>

Below the table is an 'Add Account' button. To the right of the main content area, there is a 'Helpful Hints...' section with the text: '10 voip accounts can be added here. More...'

8. Click the **REBOOT** button to save the changes and reboot the modem.

The screenshot shows the D-Link router web interface. At the top, it displays 'Product Page: DVA-G3670B' and 'Firmware Version: AUS_1.27'. The D-Link logo is prominently displayed. Below the logo is a navigation menu with tabs for 'DVA-G3670B', 'SETUP', 'ADVANCED', 'VOICE', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'MAINTENANCE' tab is selected. On the left side, there is a sidebar menu with options like 'System', 'Firmware Update', 'Access Controls', 'Diagnostics', 'System Log', and 'Logout'. The main content area is titled 'SYSTEM -- REBOOT' and contains the text: 'Click the button below to reboot the router.' Below this text is a 'Reboot' button, which is highlighted with a red circle. Below the 'REBOOT' section is another section titled 'SYSTEM -- BACKUP SETTINGS' with the text: 'Backup DSL Router configurations. You may save your router configurations to a file on your PC. Note: Please always save configuration file first before viewing it.' Below this text is a 'Backup Settings' button. To the right of the main content area, there is a 'Helpful Hints...' section with the text: 'This page allows you to reboot your router or save your router configuration to a file on your computer as a precaution in case you have to reset your router to factory default settings. You will be able to restore your router settings from a previously saved configuration file. There is also a function to allow you to reset your router to factory default settings. Resetting your router to factory default settings will erase your current configuration.'

8. Once the device has rebooted, log back in to the configuration and select the STATUS button in the top menu, followed by VOICE in the left menu to check the STATUS of your VoIP service.

Note: Once the modem is rebooted, it may take up to 3 minutes for the ADSL and VoIP service to connect. Please ensure that the Internet is active once the reboot has completed.

Another way to check if the modem has registered to the VoIP provider is by checking if the VoIP lights (1 and 2) are active on the front panel of the DVA-G3670B.

