


Nuclias Connect Controller

DNH-1000

Centralised Management Controller for compatible Access Points and Switches

- Manage up to 500 Nuclias Connect compatible Access Points and Switches
- Designed for easy management of small through to larger networks
- On-premise management for enhanced data privacy
- Intuitive user interface
- Detailed traffic reporting and analytics
- Remote configuration and batch configuration
- Configuration backup and restoration
- Remote firmware management for connected devices
- Multi-tenant and role-based administration
- Searchable and auditable event and change logs
- Multilingual support
- Front desk ticket management

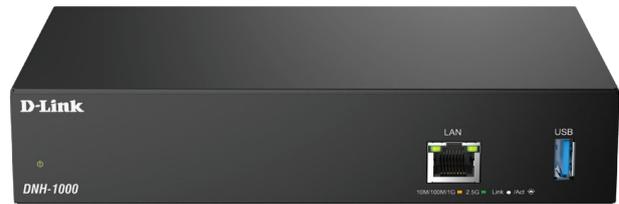

User Benefits



Centralised Device Management

Manage devices, schedule configurations, and mass device update firmware via one platform



Role-Based Administration

Assign role-based access and permissions to ensure secure and localised network control



Real-Time Monitoring & Alerts

Generate detailed reports and receive instant alerts from a centralised dashboard



Traffic Reporting & Analytics

Detailed insights to identify trends and optimise the network via real-time visualisation and reports



VLAN & Access Control

Network segmentation, traffic prioritisation and access policies to enhance security and efficiency



Auto RF Management and Bandwidth Optimisation

Auto-adjusting channels, power, and bandwidth boosts connectivity and reduces interference



Multi-SSID and Captive Portal Authentication

Set up separate networks for users with secure, customisable logins for guests and employees



Online Firmware Upgrades

Remotely update firmware for the latest features, security, and performance improvements

Technical Specifications

Hardware Design		
Device Interface	• 2.5G Ethernet Port x 1	• USB 3.0 x 1
LEDs	• Power/Status	• LAN
Dimensions	190 x 120 x 38 mm	
Weight	640 g	
Power Supply	External, 12V/2A, 100-240V AC-in	
MTBF	> 30,000 hours	
Operating Temperature	0°C to 40°C (32°F to 104°F)	
Storage Temperature	-20°C to 70°C (-4°F to 158°F)	
Operating Humidity	10% to 90% non-condensing	
Storage Humidity	5% to 95% non-condensing	
Certifications	• CE • FCC	• RoHS
Software		
Management System	Nuclias Connect	
Device Management		
Management Scale	Up to 500 devices	
Network Type	Medium/large networks	
Managed Devices	Compatible Nuclias Connect Access Points and Switches (please refer to supported devices list)	
Device Layer 2/3 Discovery	Layer2 / Layer 3	
Batch Configuration	√	
Online Firmware Upgrades	√	
AP Reboot Scheduling	√	
Wireless Scheduling	√	
PoE Scheduling	√	
System Management		
Setup Wizard	√	
Role-Based Administration	√	
Multi-Site Management	√	
Single Sign On	√	
REST API Support	√	
Multilingual	√	
Configuration Backup & Restore	√	
Network Management		
VLAN Group	√	
MAC ACL Group	√	
IGMP Snooping	√	
Cable Diagnostics	√	
Captive Portal Authentication	<ul style="list-style-type: none"> • Web Redirection Only • Local DB • Remote Radius • LDAP • POP3 	<ul style="list-style-type: none"> • External Captive Portal • Passcode • MAC Address • Click Through
MAC Filter	√	
Auto RF Management	√	
Bandwidth Optimization	√	
Neighbor AP Detection	√	
Payment Gateway (Paypal)	√	

Monitoring	
Dashboard	√
Network Topology	√
Floor Plan	√
Devices List	√
Clients List	√
Network Reports	√
Logs (System/Device/Audit)	√
Event Alarm and Notification	√

Supported Devices

Device Type	Technology	Model	HW Version
Access Points	Wi-Fi 7	DAP-E9560	A1
	Wi-Fi 6	<ul style="list-style-type: none"> • DAP-X2810 • DAP-X3060 	A1
	Wi-Fi 5	<ul style="list-style-type: none"> • DAP-2662 • DAP-3666 	A1
Switch	Aggregation	<ul style="list-style-type: none"> • DXS-3130-28/28P/32S • DMS-3130-30PS/30TS 	A1
	Edge	<ul style="list-style-type: none"> • DGS-1100-10MPV2/10MPPV2/16V2/18PV2/24PV2/24V2/26MPV2/26MPPV2 • DGS-1100-18PV2 • DGS-1210-10/10MP/10P/20/26/28/28MP/28P/52/52MP • DGS-1210-08P/16/24/24P/48 • DXS-1210-10TS/10UP/12SC/12TC/16TC • DMS-1250-10S/10SP/10SPL/12/12TP/18/18P/28/28P • DXS-1250-28YP 	Ax
			J2
			Fx
			Gx
			B1
			A1
A1			

Connection Diagram

