



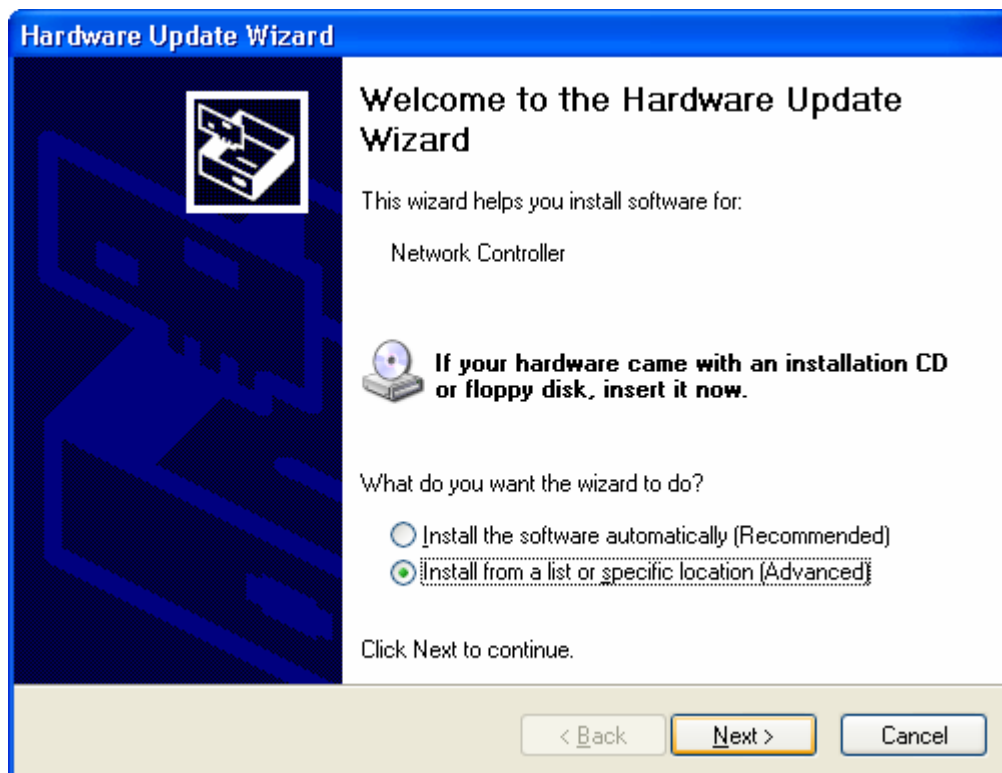
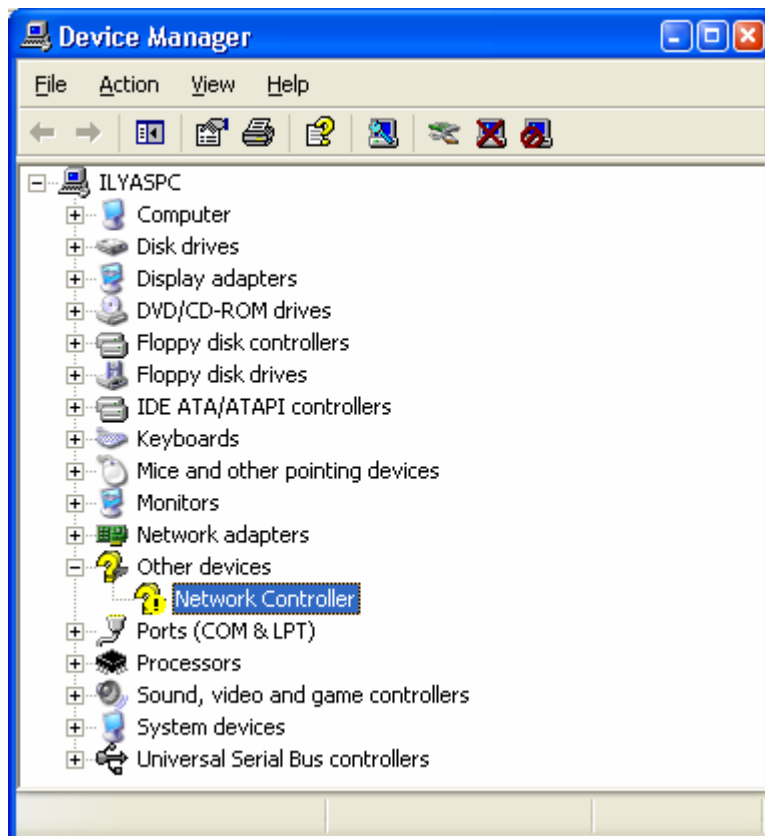
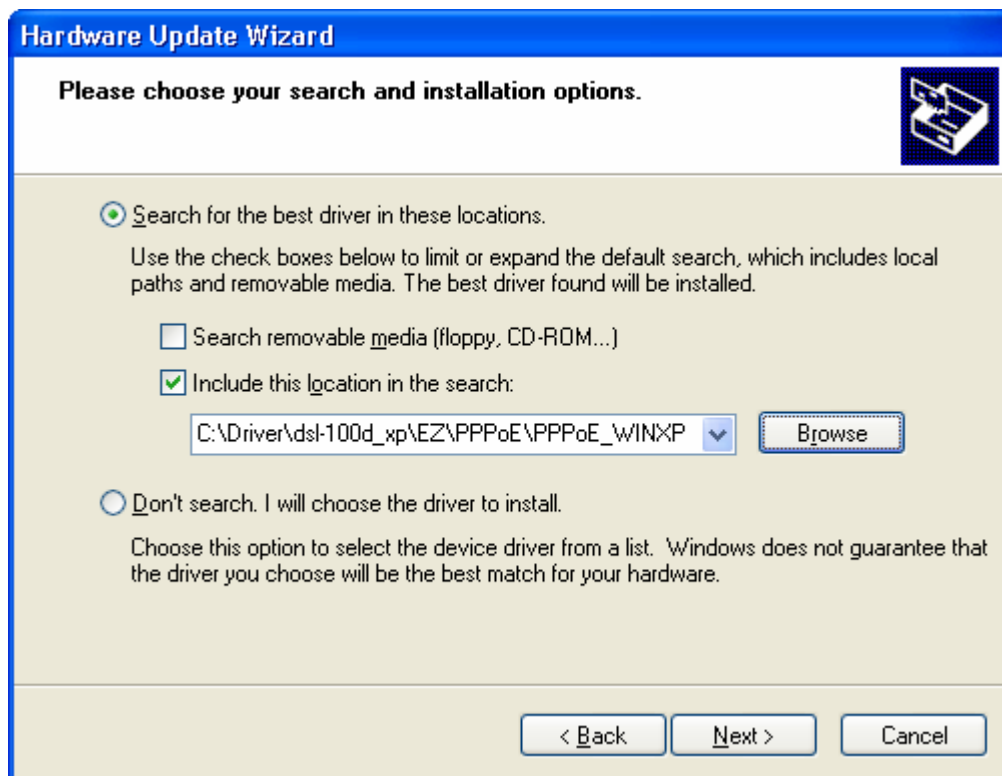



## DSL-100D in Windows XP

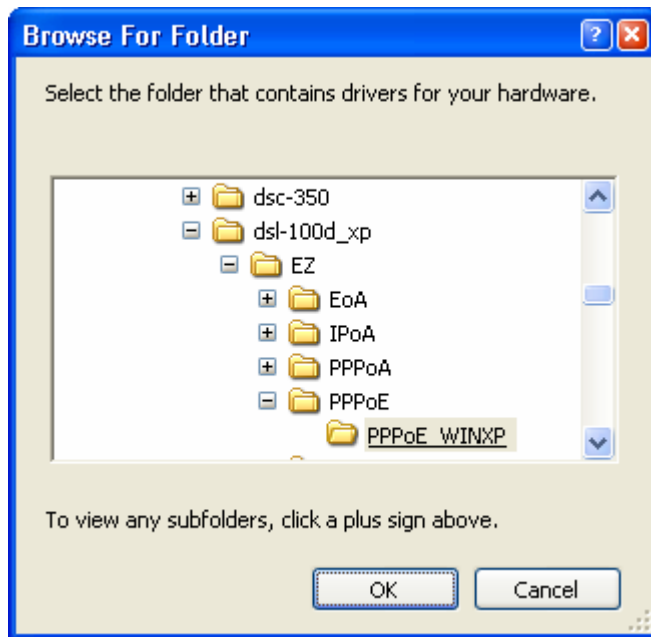

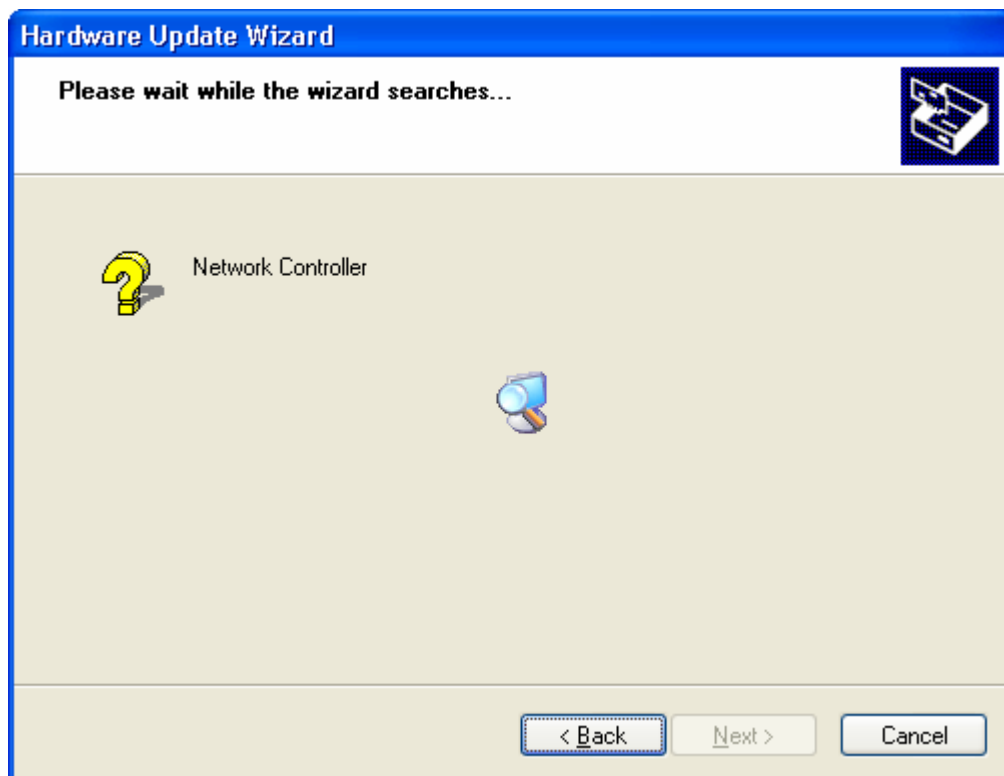


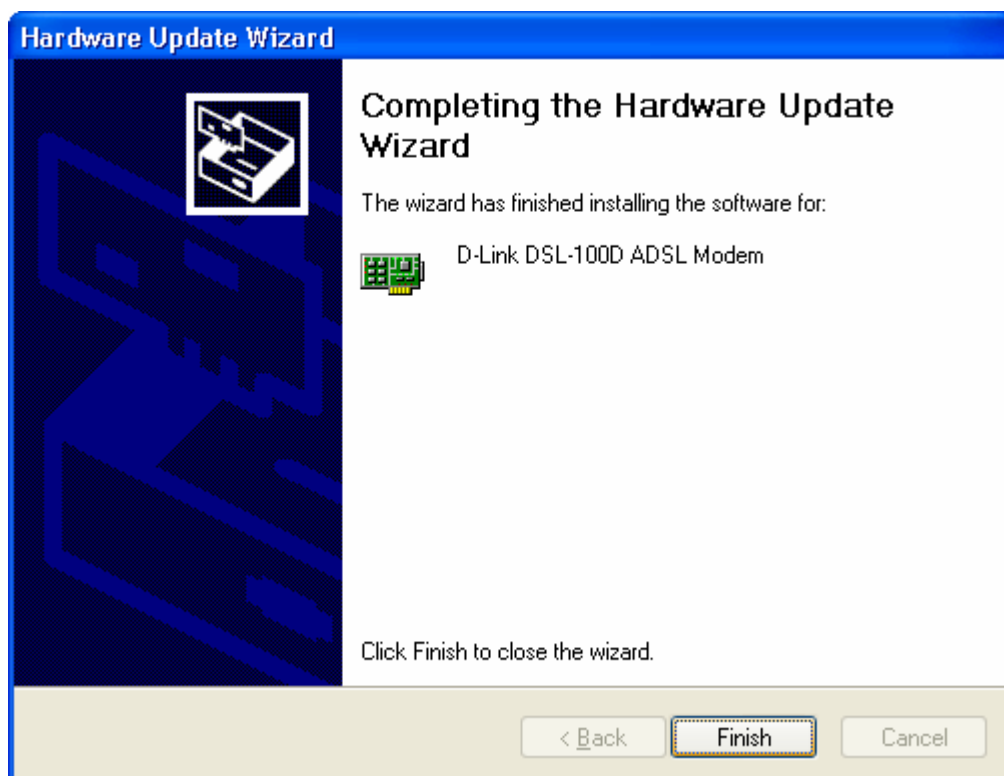


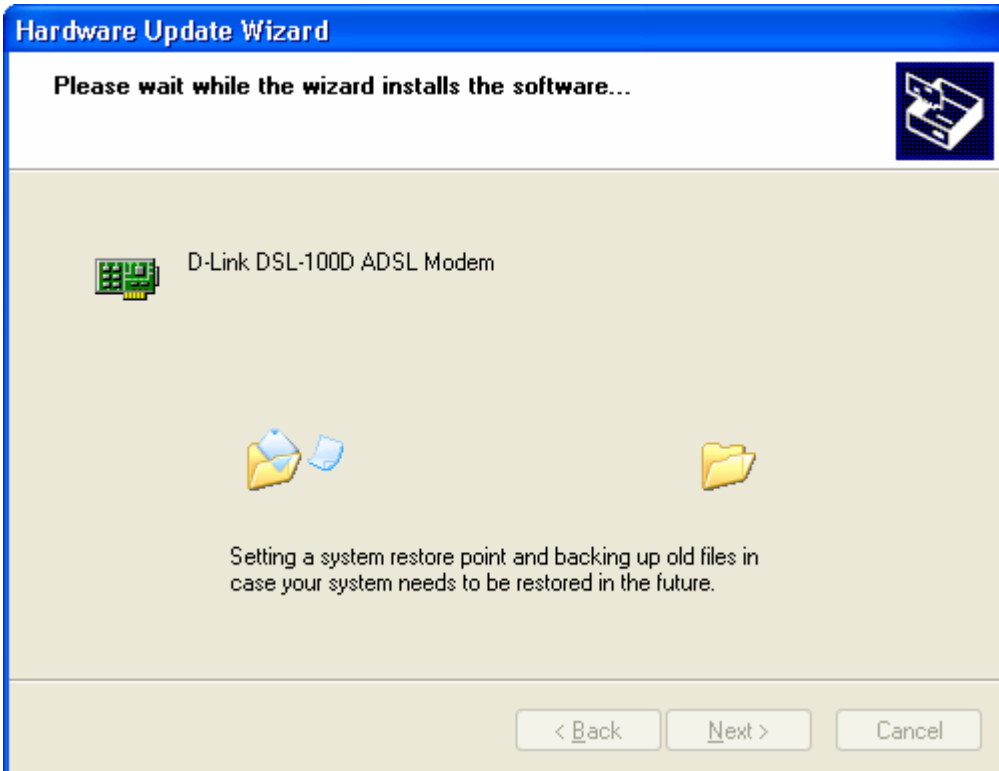

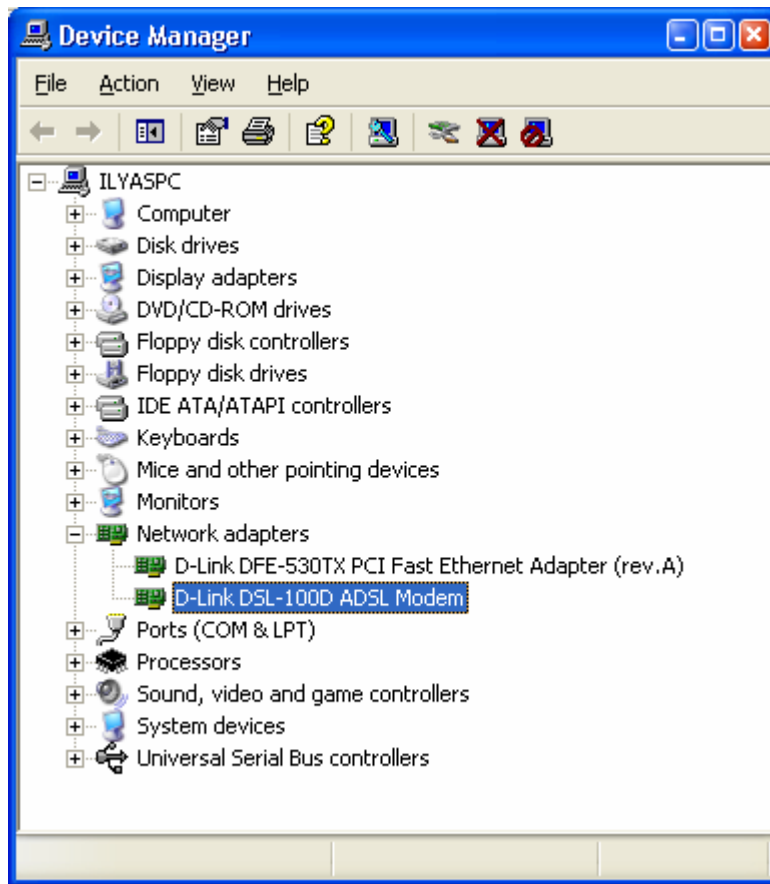





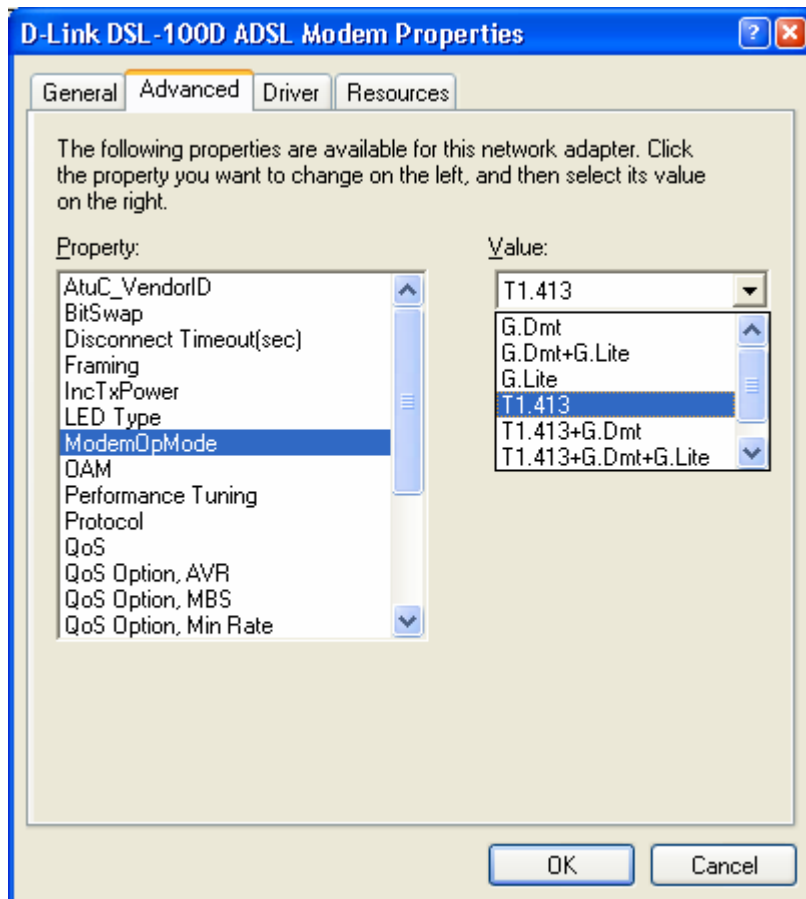

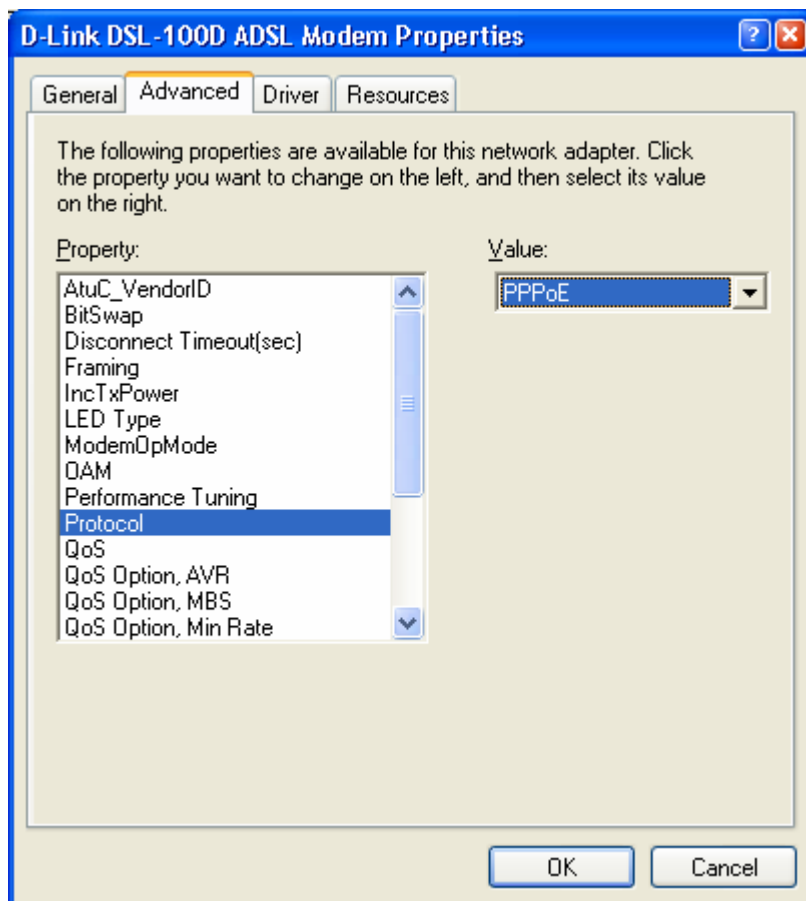



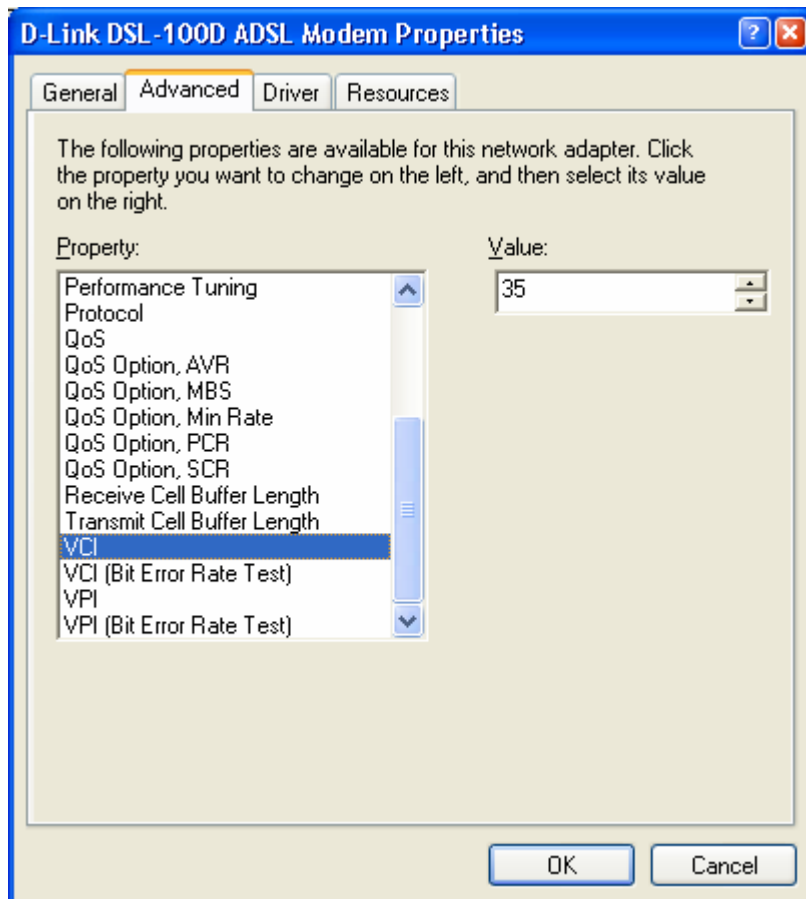

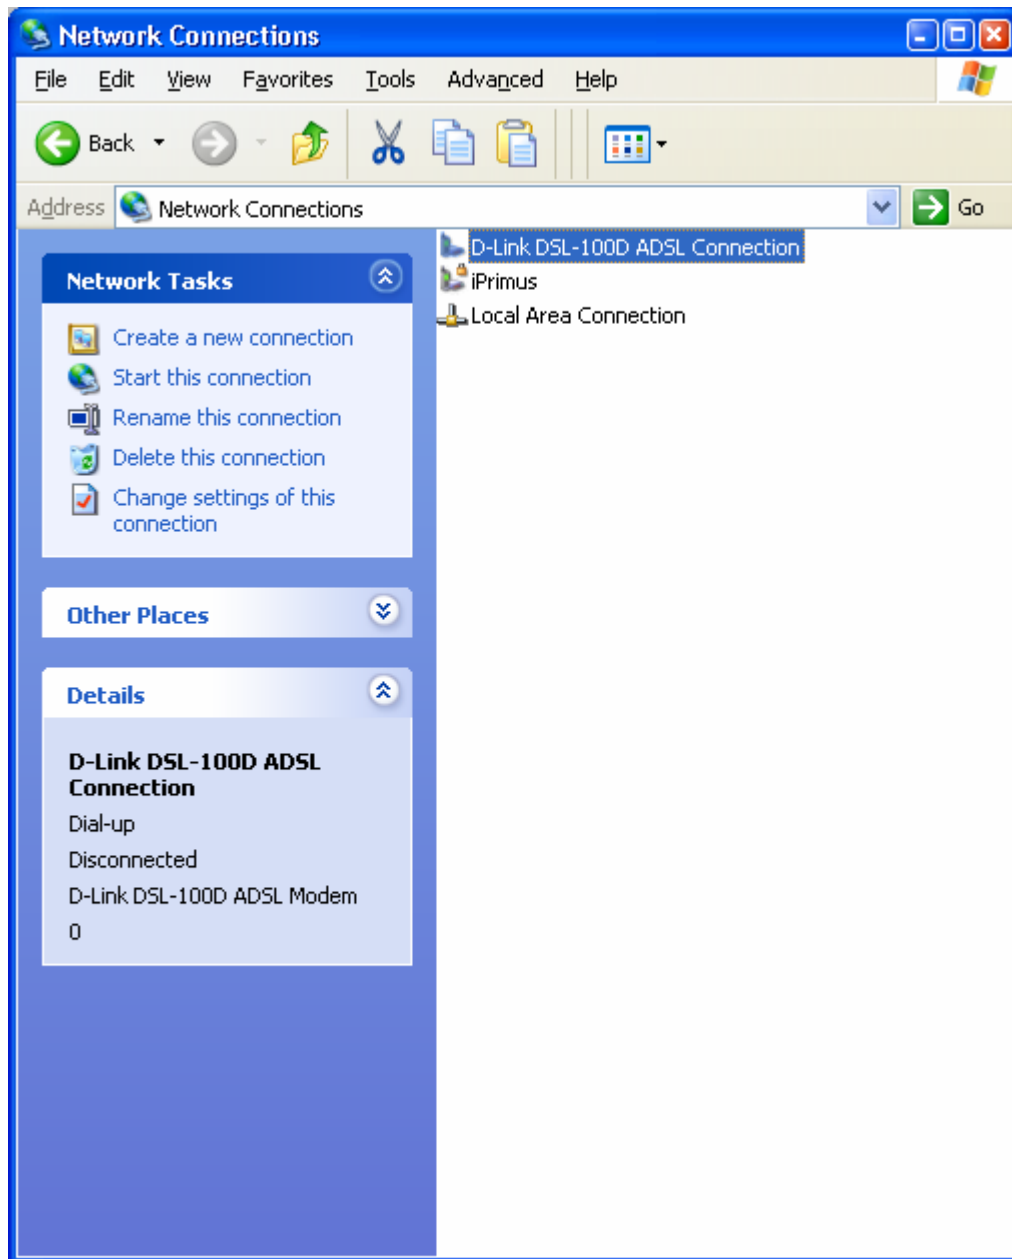



**ADSL Status** [X]

ADSL Connection Information

ADSL State

Protocol

Transmit / Receive Rate (Kbps)

	Data Rate
Upstream	<input type="text" value="0"/>
Downstream	<input type="text" value="0"/>

**Diagnostic** [X]

\*\*\* Product Information \*\*\*

ADSL Icon Mapi

Application Version : 2.5

DLL Version : 2.5

Driver Version : 2.3.7

**Diagnostic** [X]

Hardware Test : "ADSL Bridge - PCI I/O Test" ==> Pass

Hardware Test : "ADSL Controller Registers Test" ==> Pa

Hardware Test : "ADSL Controller Memory Test" ==> Pass

Hardware Test : "ADSL Bridge - PCI DMA Loopback"

Fast ==> Trial:20, Pass:20

Interleave ==> Trial:20, Pass:20

Hardware Test : "ADSL Controller Utopia Loopback"

Fast ==> Trial:20, Pass:20

Interleave ==> Trial:20, Pass:20

**ADSL Statistic**

ADSL Information

Re-training Count

FEC Count

CRC Count

ATM HEC Count

ATM Receive Side Statistics

Good Received Packets

Bad Received Packets

ADSL Transmission Side Statistics

Transmitted Packets

ADSL Connection Information

ADSL State

Close

**Configuration**

PVC Setup

Select ADSL Mode

☐ ANSI T1.413 Issue 2


☒ ITU G.992.2 Annex A (G.lite)

☒ ITU G.992.1 Annex A (G.dmt)

Close

**PVC Table**


ISP Name	Vpi / Vci	Protocol	Framing	Status
ADSL Service Provider	0,35	2364 (PPPoA)	LLC/SNAP	Active

**Edit PVC Entry** 

ISP Name

Vpi

Vci

Protocol  

Framing  