

D-Link Quick Installation Guide

This product can be set up using Keypad and Web browser, such as IE (Internet Explorer).



DPH-120S
IP Phone

Check Your Package Contents

These are the items included with your DPH-120S IP Phone purchase :



• **DPH-120S VoIP Phone**



• **CD-ROM (containing Manual and Installation program)**



• **Ethernet cable**



• **Power cord**




Using a power supply with a different voltage rating will damage and void the warranty for this product.

If any of the above items are missing, please contact your reseller.

The Appearance of Product

Front view and keypad function:

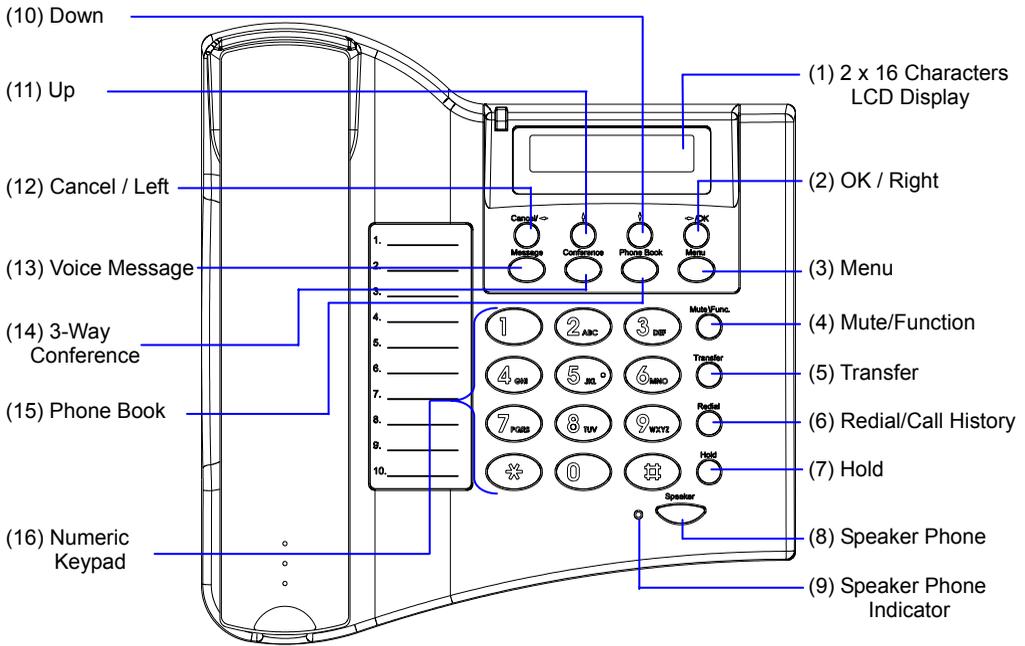


Keys	Functions
(1) LCD Display	Displays menu, time, clock, name, phone number, call status
(2) OK/Right	Confirm setting change, exit menu, dial, save changes
(3) Menu	Access the phone menu
(4) Mute/Function	Disable user's microphone so that the person on the other line can not hear anything, access the language selection, access the time format
(5) Transfer	Transfer the person you are currently having a conversation to another line
(6) Redial/Call History	Redial last dialed number, access redial menu
(7) Hold	Place the person on the other line on hold, answer call waiting
(8) Speaker Phone	Enable user to use the phone without using the handset
(9) Speaker Phone Indicator	Indicates that phone is currently in speaker phone mode
(10) Down	Cycle through the phone menu, adjust volume
(11) Up	Cycle through the phone menu, adjust volume
(12) Cancel/Left	Deny changes, cancel phone calls, ignore phone calls, backspace
(13) Voice Message	Check voice message
(14) 3-Way Conference	Enable 3-way conference
(15) Phonebook	Access the phonebook
(16) Numeric Keypad	Input IP/phone number/alphabet characters

Text entry


You use alphanumeric characters to enter details in to the ADSL ID and ADSL Password from phone as your ISP provide. This text entry is also available for phone book setting.


Key	Text Mode		Key	Text Mode	
	Normal (ABC)	Numeric (0-9)		Normal (ABC)	Numeric (0-9)
		1		PQRSpqrs	7
	ABCabc	2		TUVtuv	8
	DEFdef	3		WXYZwxyz	9
	GHIghi	4		@ . _ * # () % & + / \$,	0
	JKLjkl	5			*
	MNOmno	6			#

Connector:

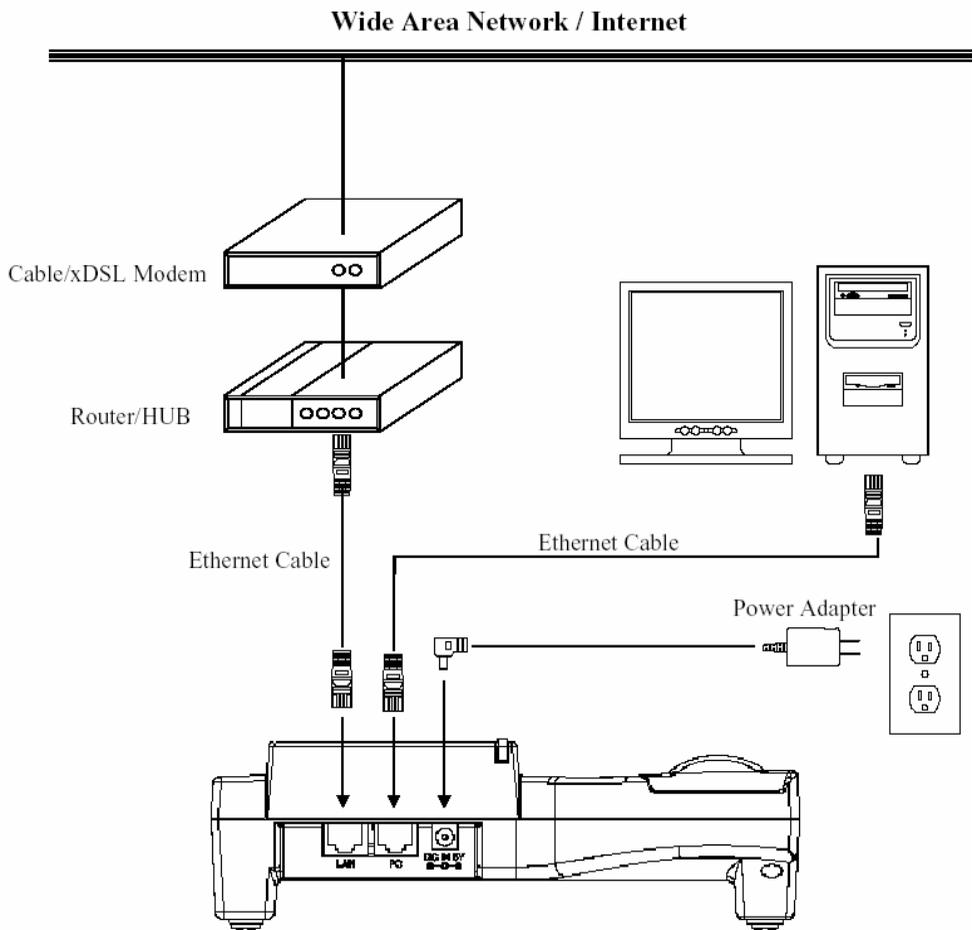

IP Phone Setup Menu

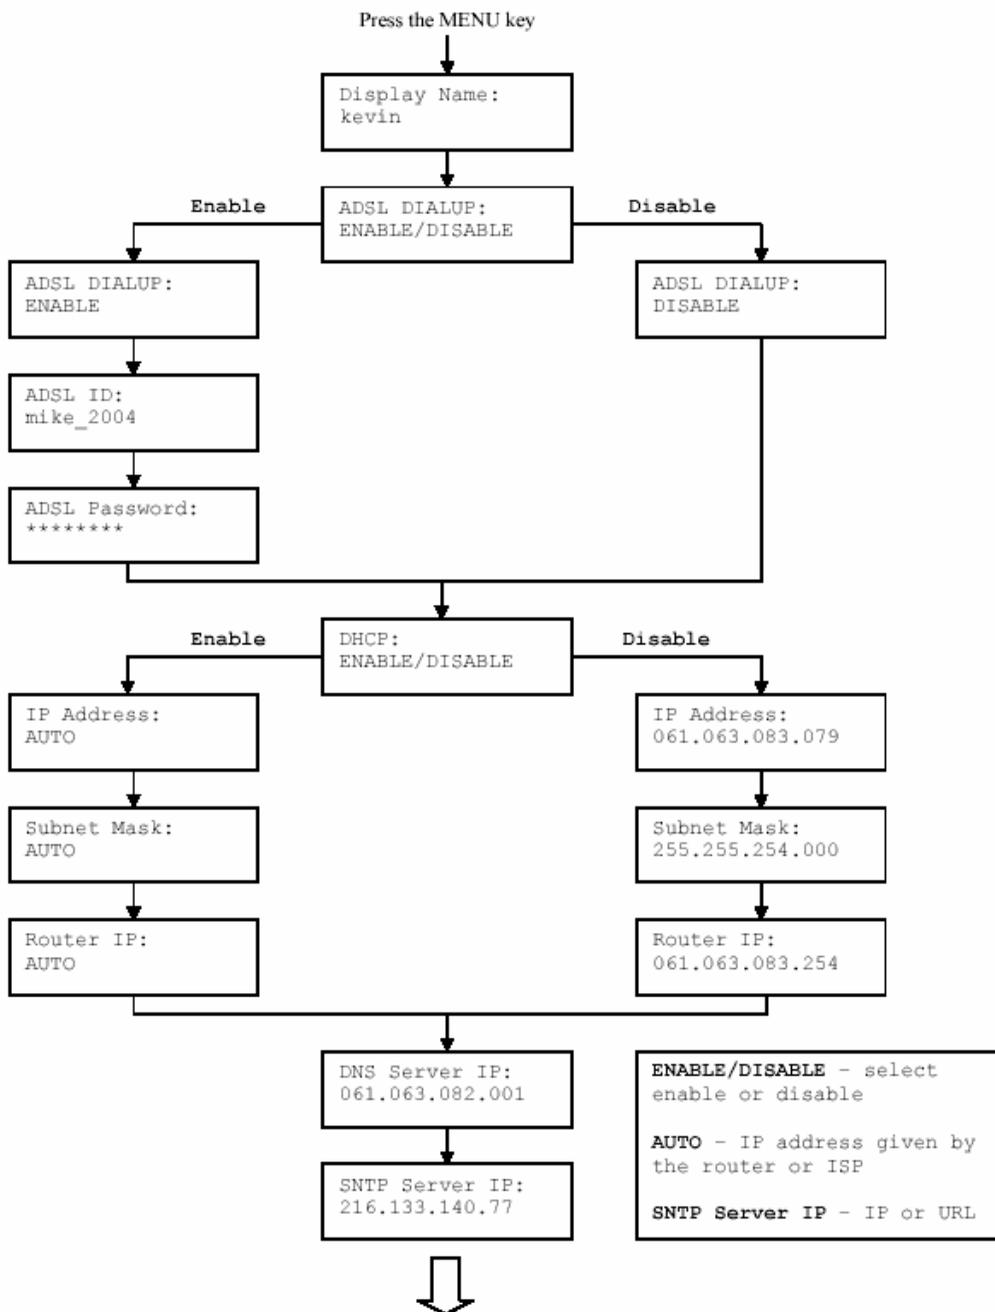

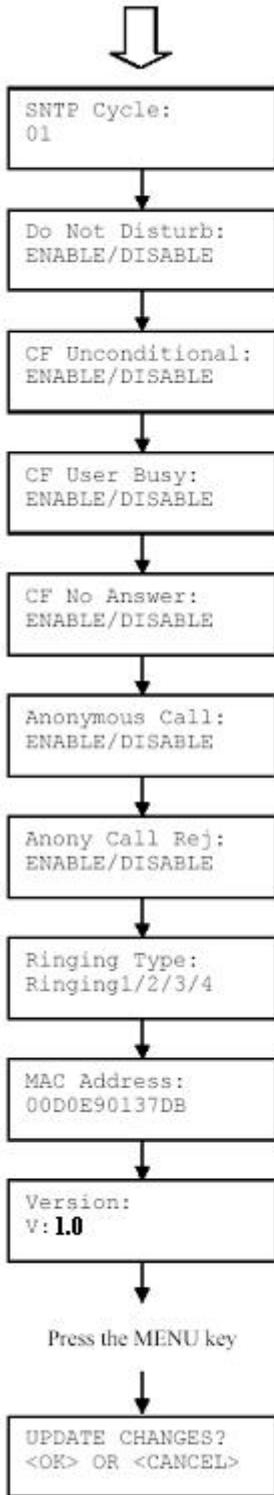

NOTE 1: If you made any modifications, you may

quit setup at any time by pressing  +  /OK save and exit or  +  /Cancel to quit without saving. The phone will automatically exit the menu screen if there are no inputs from the user.

NOTE 2: Use up  and  down arrow on the direction pad to switch among stages.

NOTE 3: Use left  /Cancel and  /OK right arrow on the direction pad to select ENABLE or DISABLE.

NOTE 4: Left arrow key  /Cancel can be used as **Backspace** key.

Ringing1/2/3/4 - select ringing1, 2, 3 or 4

Technical Support

You can find software updates and user documentation on the D-Link websites.

D-Link provides free technical support for customers within Canada, the United Kingdom, and Ireland.

Customers can contact D-Link technical support through our websites, or by phone.

For Customers within The United Kingdom & Ireland:

D-Link UK & Ireland Technical Support over the Telephone:

(08456 12 0003 (United Kingdom)

+44 8456 12 0003 (Ireland)

Monday to Friday 8:00 am to 10:00 pm GMT

Sat & Sun 10.00 am to 7.00 pm GMT

D-Link UK & Ireland Technical Support over the Internet:

<http://www.dlink.co.uk>

<ftp://ftp.dlink.co.uk>

For Customers within Canada:

D-Link Canada Technical Support over the Telephone:

1-800-361-5265 (Canada)

Monday to Friday 7:30 am to 12:00 am EST

D-Link Canada Technical Support over the Internet:

<http://support.dlink.ca>

email: support@dlink.ca

D-Link®

Building Networks for People