D-Link Quick Installation Guide

This product can be set up using Keypad and Web browser, such as IE (Internet Explorer).

DPH-140S

IP Phone

Check Your Package Contents

These are the items included with your DPH-140S IP Phone purchase：

- **DPH-140S VoIP Phone**

- **CD-ROM (containing Manual and Installation program)**

- **Ethernet cable**

- **Power cord**

Using a power supply with a different voltage rating will damage and void the warranty for this product.

If any of the above items are missing, please contact your reseller.

©2003 D-Link Systems, Inc. All rights reserved. Trademarks or registered trademarks are the property of their respective holders. Software and specifications subject to change without notice.

The Appearance of Product

Front view and keypad function:

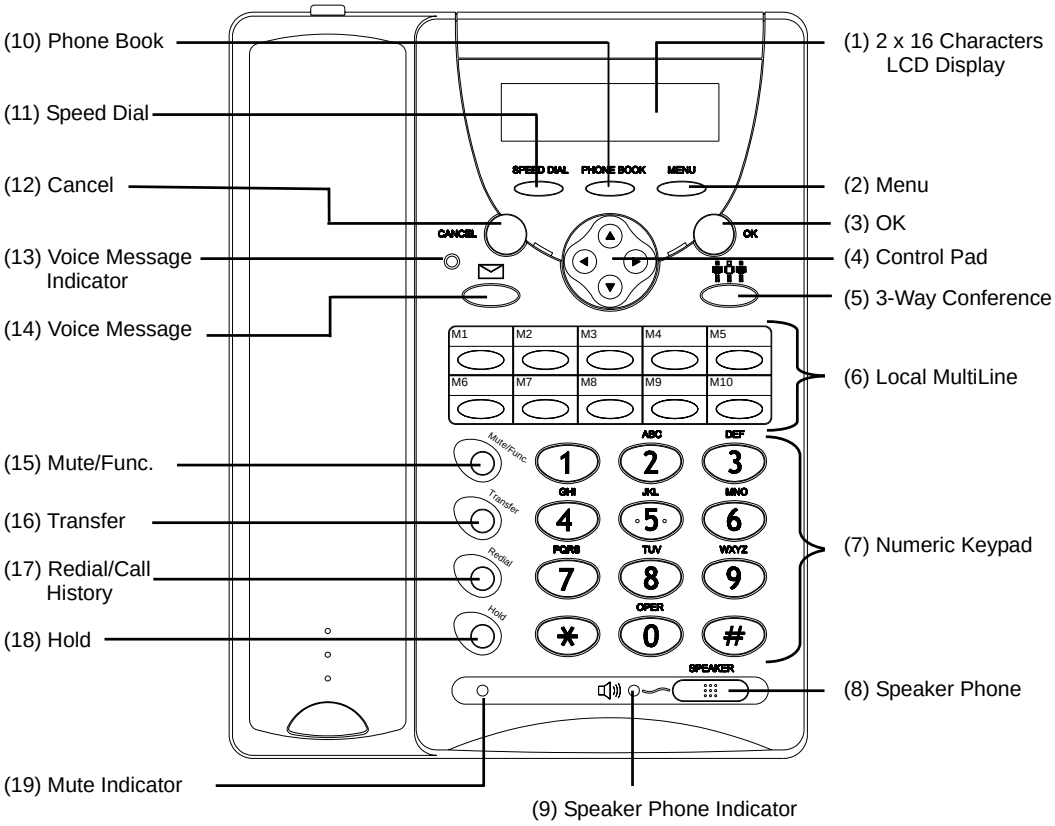

Keys	Functions
(1) LCD Display	Displays menu, time, clock, name, phone number, call status
(2) Menu	Access the phone menu
(3) OK	Confirm setting change, exit menu, dial, save changes
(4) Control Pad	Backspace, scroll up or down, select enable or disable
(5) 3-Way Conference	Enable 3-way conference
(6) Local Multiline	Switch to different lines
(7) Numeric Keypad	Input IP/phone number/alphabet characters
(8) Speaker Phone	Enable user to use the phone without using the handset
(9) Speaker Phone Indicator	Indicates that phone is currently in speaker phone mode
(10) Phonebook	Access the phonebook
(11) Speed Dial	Access the speed dial menu
(12) Cancel	Deny changes, cancel phone calls, ignore phone calls
(13) Voice Message Indicator	Indicates that there is a voice message
(14) Voice Message	Check voice message
(15) Mute	Disable user's handset microphone so that the person on the other line can not hear anything
(16) Transfer	Transfer the person on the other line to another number
(17) Redial/Call History	Redial last dialed number, access redial menu
(18) Hold	Place the person on the other line on hold
(19) On Hold Indicator	Indicates that the person on the other line is currently placed on hold

Text entry

You use alphanumeric characters to enter details in to the ADSL ID and ADSL Password from phone as your ISP provide. This text entry is also available for phone book setting.

	Text Mode			Text Mode	
Key	**Normal (ABC)**	**Numeric (0-9)**	**Key**	**Normal (ABC)**	**Numeric (0-9)**
		1		PQRSpqrs	7
	ABCabc	2		TUVtuv	8
	DEFdef	3		WXYZwxyz	9
	GHIghi	4		@ . _ — * # ( ) % & + / $,	0
	JKLjkl	5			*
	MNOmno	6			#

Connector:

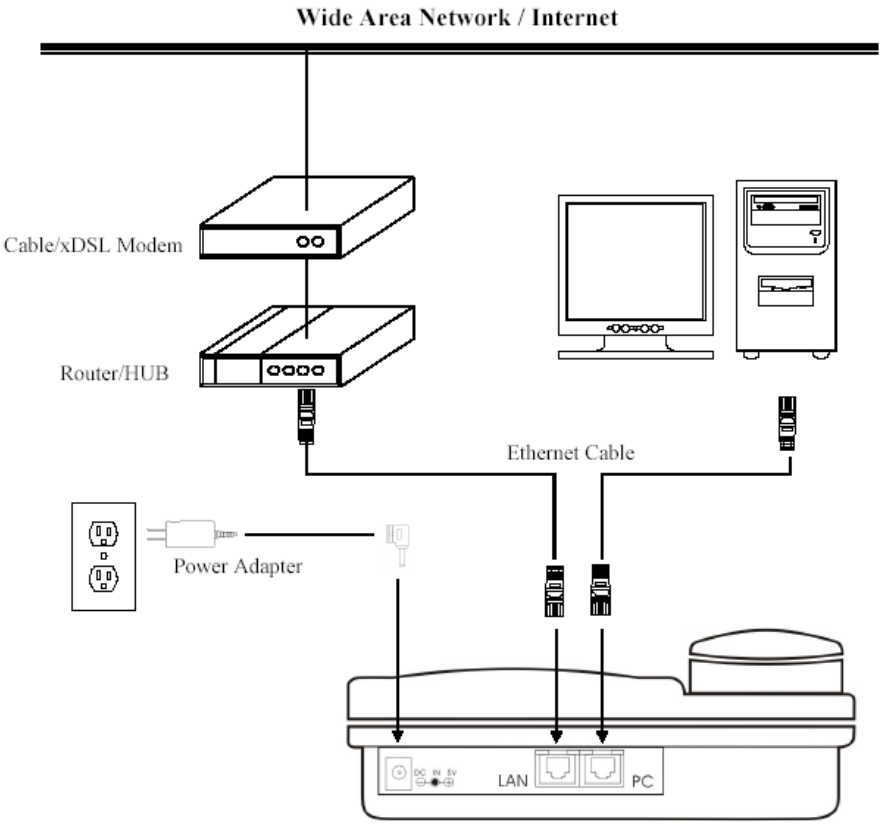
Wide Area Network / Internet
Cable/xDSL Modem
Router/HUB
Ethernet Cable
Power Adapter
LAN
PC

IP Phone Setup Menu

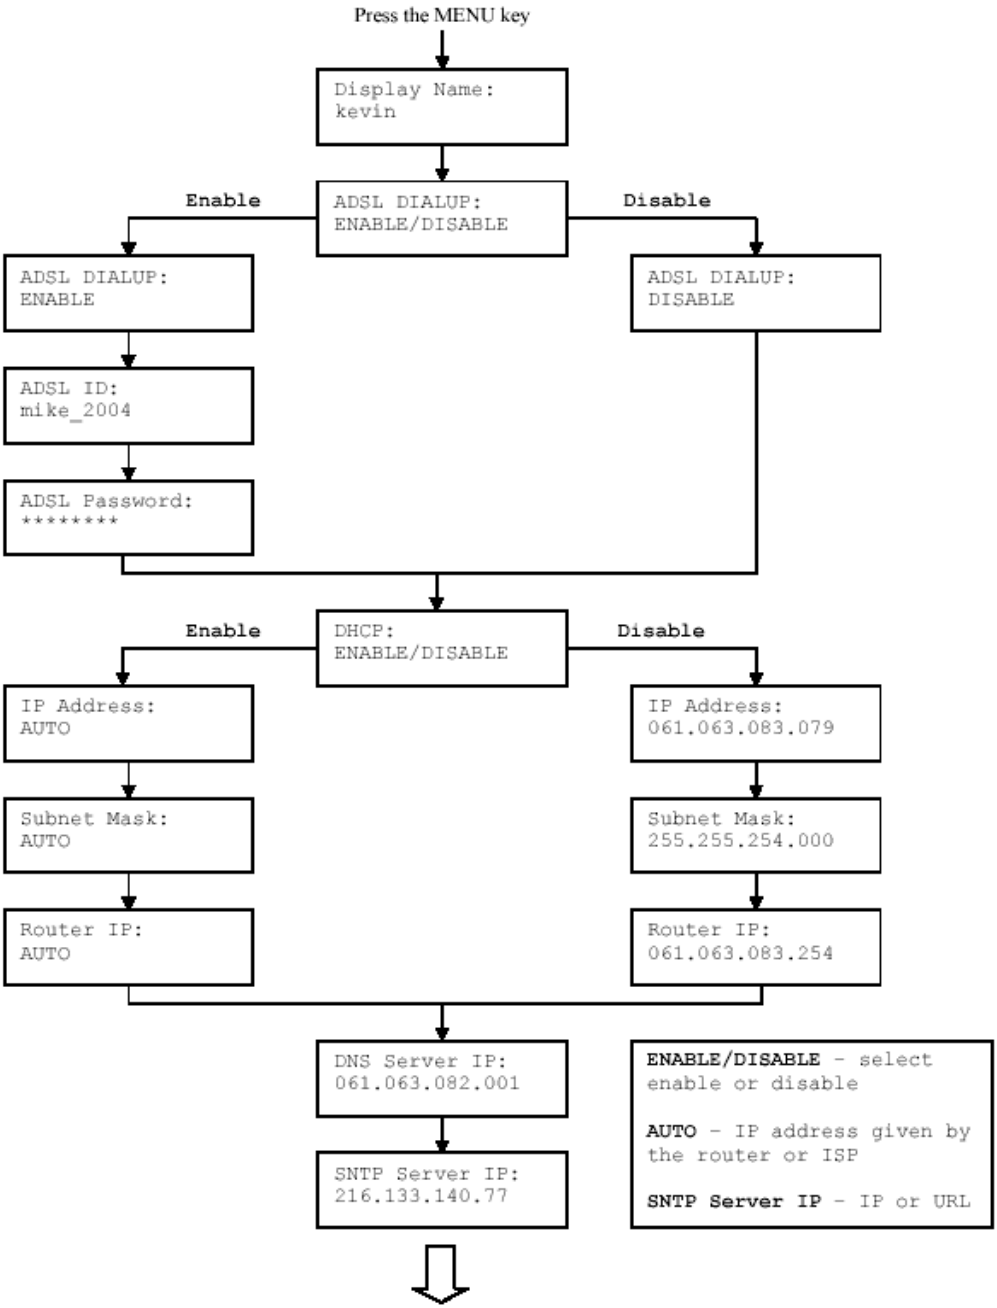

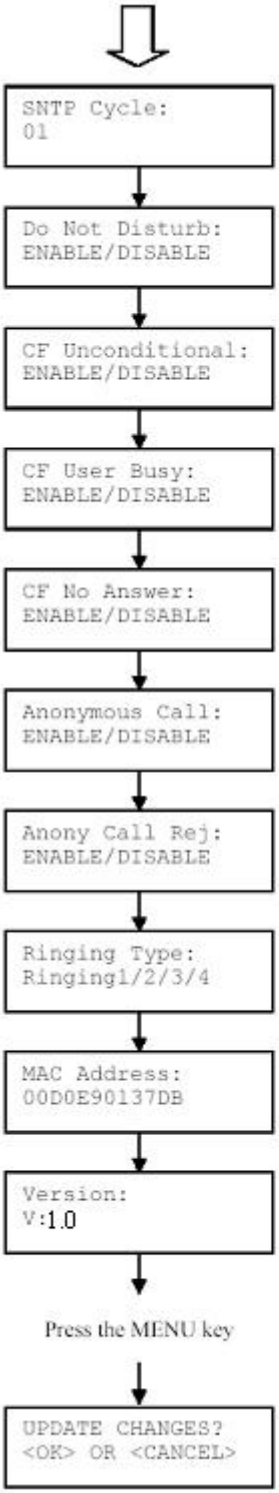

NOTE 1: If you made any modifications, you may quit setup at any time by pressing MENU + OK save and exit or MENU + CANCEL to quit without saving. The phone will automatically exit the menu screen if there are no inputs from the user.

NOTE 2: Use up ▲ and down ▼ arrow on the direction pad to switch among stages.

NOTE 3: Use left ◀ and right ▶ arrow on the direction pad to select ENABLE or DISABLE.

NOTE 4: Left arrow key ◀ can be used as **Backspace** key.

Ringing1/2/3/4 - select ringing1, 2 , 3 or 4

Technical Support

You can find software updates and user documentation on the D-Link websites.

D-Link provides free technical support for customers within Canada, the United Kingdom, and Ireland.

Customers can contact D-Link technical support through our websites, or by phone.

For Customers within The United Kingdom & Ireland:

D-Link UK & Ireland Technical Support over the Telephone:

(08456 12 0003 (United Kingdom)
+44 8456 12 0003 (Ireland)

Monday to Friday 8:00 am to 10:00 pm GMT
Sat & Sun 10.00 am to 7.00 pm GMT

D-Link UK & Ireland Technical Support over the Internet:

http://www.dlink.co.uk
ftp://ftp.dlink.co.uk

For Customers within Canada:

D-Link Canada Technical Support over the Telephone:

1-800-361-5265 (Canada)
Monday to Friday 7:30 am to 12:00 am EST

D-Link Canada Technical Support over the Internet:

http://support.dlink.ca
email: support@dlink.ca

D-Link®
Building Networks for People