

# D-Link Quick Installation Guide

Stand-alone  
Videoconferencing Over  
Broadband IP.  
No PC Needed!



**i2Eye™** DVC-1000  
Fast Ethernet  
VideoPhone  
Patent Pending


## Before You Begin

1. Using the D-Link i2Eye™ DVC-1000 VideoPhone requires a connection to the Internet over a Broadband connection (e.g., a Cable modem or a DSL modem with a router).
2. Attaching a telephone to the i2eye is optional, but highly recommended for optimal sound quality.
3. If you are sharing the connection with another device (such as a PC) you will also need a broadband router or home gateway.

## Check Your Package Contents



**i2eye DVC-1000 Video Phone**



**Quick Installation Guide & Instruction Manual**



**Ethernet (CAT5 UTP/Straight Through) Cable**



**Standard Composite RCA Audio/Video Cable**



**Intelligent Remote Control**





**5V DC, 2A Power Adapter**

 Using a power supply with a different voltage rating will damage and void the warranty for this product.

# 1 Connecting the DVC-1000 Videophone


- A. First, place the i2eye VideoPhone directly on top of a television. To obtain the best viewing experience, the i2eye should be approximately 5 to 10 feet away from where you are viewing it.
- B. Attach the supplied audio/video cable to the i2eye and to the matching audio/video jacks on the television or VCR.
- C. Attach the supplied Ethernet cable to the i2eye and to the Cable or DSL modem or Ethernet network device (hub, switch or router).
- D. Attaching a telephone is optional, but recommended for optimal sound quality when videoconferencing. Attach a standard telephone cable to the telephone and directly to the i2eye. **Do NOT attach the telephone to a wall telephone outlet.**
- E. Plug the supplied AC power cable into an AC outlet and then into the i2eye.
- F. Attaching an external microphone is optional, but recommended for optimal sound for a group videoconference.

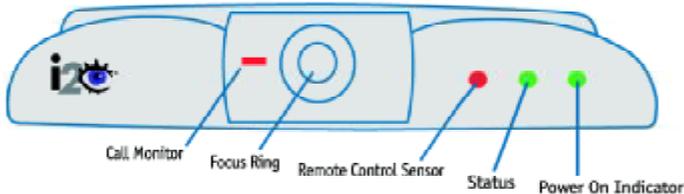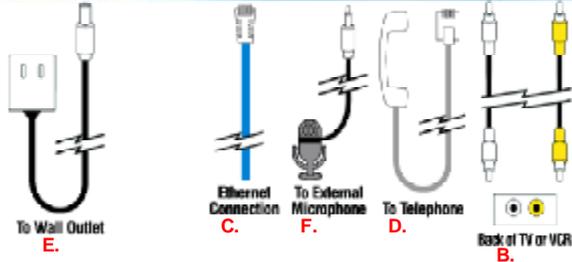

# 2 Sharing a Broadband Connection With the i2eye DVC-1000

If you are sharing your broadband connection with any other devices, use additional Ethernet (CAT5 UTP) cables to connect your broadband equipment to a router or home gateway.

When you have completed the steps in this *Quick Installation Guide*, your connected VideoPhone should look similar to this:

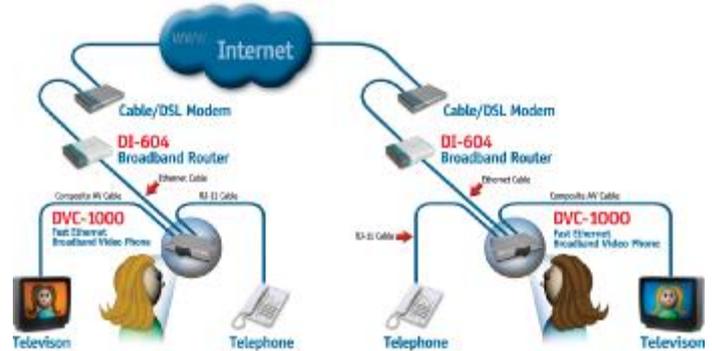


Before using your D-Link i2eye VideoPhone, you will want to understand the network requirements for this device. If you are using a home gateway or router and sharing the broadband connection with your DVC-1000, please read *Using the DVC-1000 with a Router or Gateway* on Page 33 of the manual included with the DVC-1000.

## Using the Remote Control


The i2eye VideoPhone needs to be setup before use. There is an easy to use **Setup Wizard** built-into the i2eye to accomplish the setup.

You will use the Setup Wizard along with the remote control included with the i2eye. The remote control is used to enter numbers, characters and make selections from a keyboard that is displayed on the TV screen.

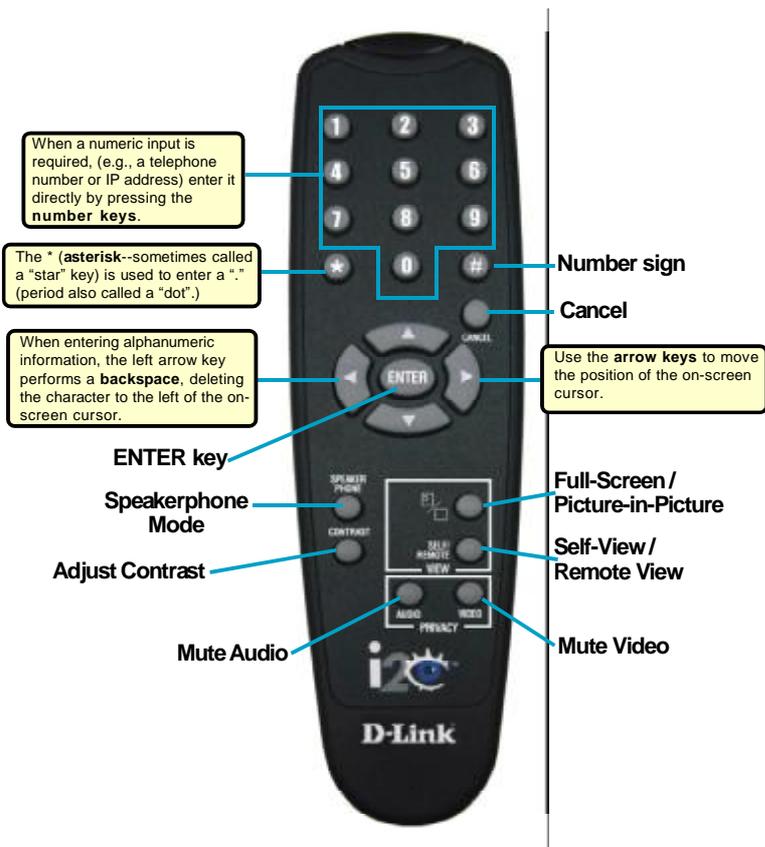

## Using the On-Screen Keyboard

Whenever you need to enter numbers or letters into a Setup screen, press **ENTER** on the remote control and the on-screen keyboard appears:

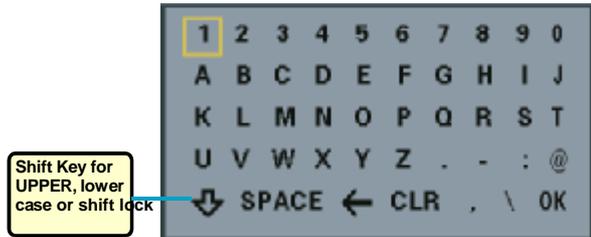

After entering characters or numbers, and to execute a selection, press **ENTER** on the remote. Use the arrow keys to move the cursor on the screen to the desired character. The cursor can wrap around on the right and left side of the keyboard to assist you in "typing" a character quickly. To remove the keyboard from the screen, highlight the OK key and press **ENTER** on the remote. Also, the **CANCEL** key on the remote removes the keyboard from the screen, leaving what you typed on the screen.

## Using a Telephone with the i2eye

In addition to providing optimal sound quality, a telephone:

- Can be used to start a videoconference similar to the way you would place a regular telephone call.
- Lets you receive a videoconference call similar to the way you would receive a regular telephone call.

You cannot use a telephone plugged into the i2eye VideoPhone to place regular phone calls as the phone would not be connected to a standard phone line. Only VideoPhone calls over the Internet can be made with a telephone connected to the DVC-1000.

## 3 The Setup Wizard

### Welcome Screen




Click Next

### Personal Information Screen

Enter your name and phone number.

The **phone number** you enter is one you create for family, friends and others to call you. You can use your regular phone number or make up a new one. The Caller ID function displays this name at the other end of the connection. Your number will not be visible to anyone.

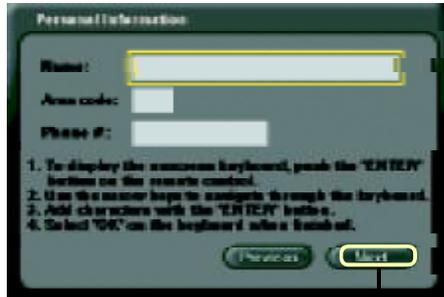

Click Next

## 3 The Setup Wizard (continued)

### Network Address Screen

Leave the **Obtain an IP address automatically** checkbox checked to obtain an IP address and other Internet settings automatically.


If you cannot automatically be assigned an IP address (through DHCP), then uncheck the checkbox and manually enter the IP Address, Subnet mask and Gateway. **Host name** is rarely used and this field is not



Click Next

### DNS Screen

If you manually entered an IP address in the **Network Address** screen, you will see the screen for setting DNS server addresses. Only the primary DNS is required, although entering both a primary and secondary DNS is recommended.

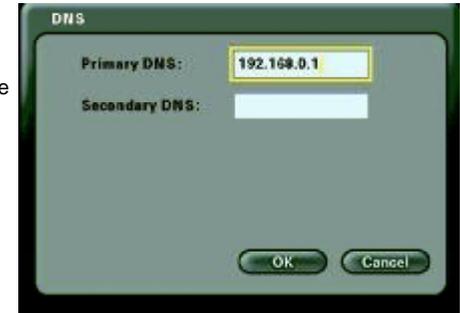

Click Next

# 3

## The Setup Wizard (continued)

### Network Speed Screen

Select the type of broadband Internet connection you use.



Click **Next**

### System Restart



Click **Yes**

Your Setup is Complete!

## Technical Support

You can find the most recent user documentation on the **i2eye** website.

**D-Link** provides free technical support for customers within the United States and Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact **D-Link** Technical Support through our web site or by phone.

### Tech Support for customers within the United States:

**D-Link i2Eye Technical Support over the Telephone:**

(800) 93-i2EYE

24 hours a day, seven days a week

**D-Link Technical Support over the Internet:**

<http://www.i-2-eye.com>

email: [support@i-2-eye.com](mailto:support@i-2-eye.com)

### Tech Support for customers within Canada:

***D-Link Technical Support over the Telephone:***

(800) 361-5265

Monday to Friday 8:30am to 9:00pm EST

***D-Link Technical Support over the Internet:***

<http://support.dlink.ca>

email: [support@dlink.ca](mailto:support@dlink.ca)

