



How to change PVC for DSL-300 Gen-II

Example here uses Ver: D1 hardware.


1. Create an empty folder eg. C:\temp\
2. Copy the file DSL300familyCfgR2.00.B4.exe from the DSL-300 CD-ROM to the folder C:\temp\.
3. Run the DSL300familyCfgR2.00.B4.exe to extract all the files.
4. Then, run the c:\temp\SETUP.EXE and follow the prompt to complete the utility installation.
5. You will see “DSL-300 Family Configuration Utility” being installed.
6. Execute “DSL-300 Family Configuration Utility” and you will see something like below:

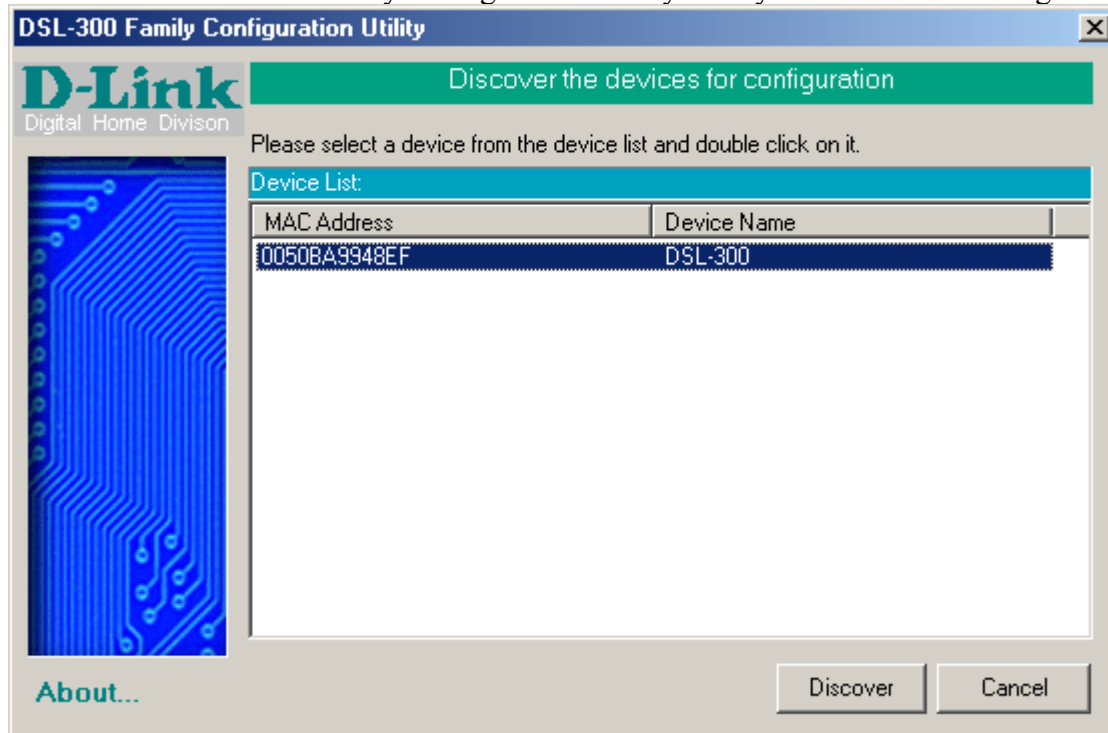


7. Double-click on DSL-300 discovered above.
8. Enter the default password “admin” into the dialog below and click “OK”.

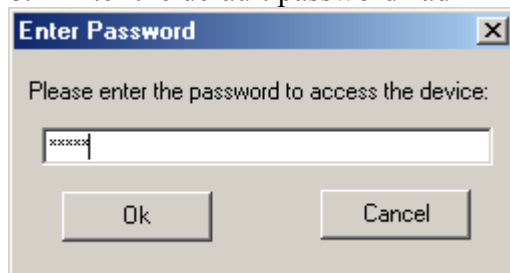

9. Select “General ADSL Information” tab, then select Channel 1 as shown below:

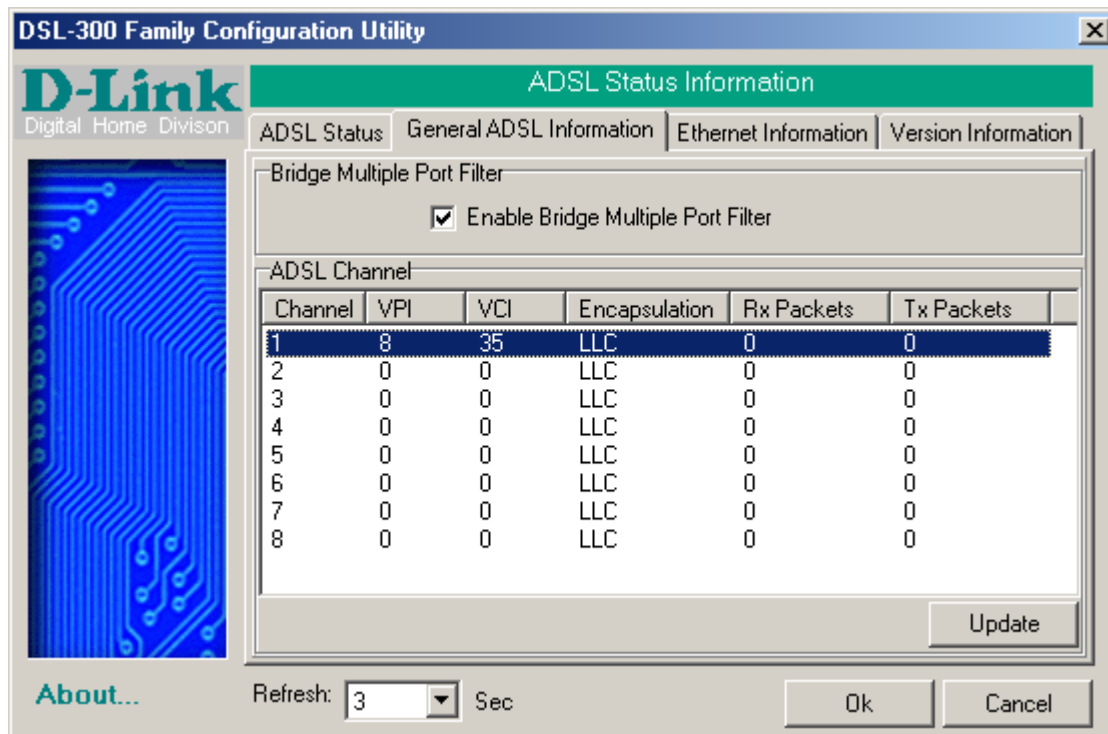


10. Click on the “Update” button at the bottom and you will see:

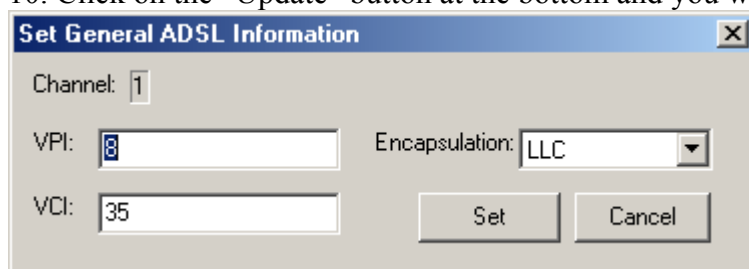


11. Change the “VPI”, “VCI” and “Encapsulation” settings according to your ISP’s requirements. Please note that the existing default settings will work for most local ISPs without any need to be changed.

12. Once you have confirmed your settings, click “Set”. Click “OK” and then “Yes” below to save the configuration and restart the system.

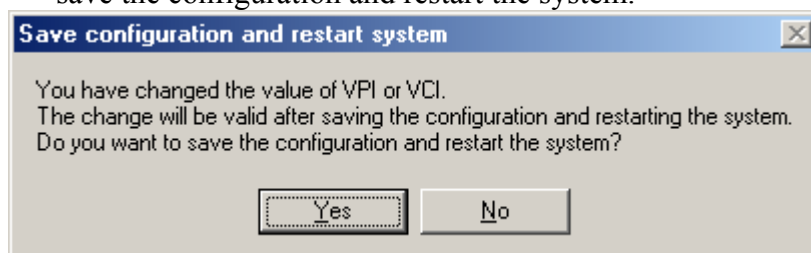

13. The changes have been saved. You could click “Yes” below to quit the program.

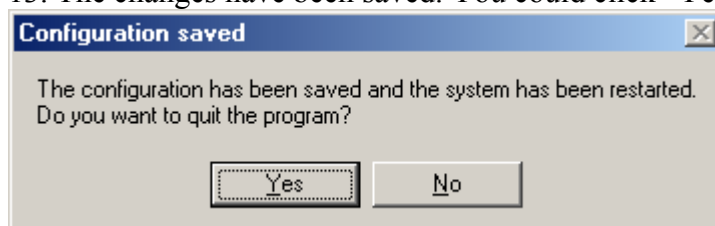

~ End of Document ~