

Highlights

High-speed 2.5G WAN Ports

2.5G WAN and LAN ports deliver high-speed connections for fast data transfer and reliable access for demanding applications.

Multi-WAN Connectivity

Multi-WAN intelligent fail-over ensures uninterrupted connectivity by switching to a backup WAN when the primary fails, enhancing reliability and service consistency.

Secure VPN Capability

A VPN provides secure, encrypted connections for safe remote access, which is ideal for small offices and cafes.



DBR-700

Multi-WAN 2.5G Smart Office Series VPN Router

Key Features:

High-Performance VPN

- Protocols
 - IPSec/ PPTP/L2TP/WireGuard/OpenVPN

Complete 2.5G Interface Across All 9 Ports

- 1 x 2.5GB WAN Port
- 7 x 2.5G LAN Ports
- 1 x 2.5G SFP Port

WAN Redundancy/Load Balance

• Dual WAN Redundancy

High Security Feature

- SPI Firewall
- DoS/DDoS/IPS
- URL Blocking
- User Authentication

Smart AP Management

 Seamlessly manages up to 15 DBR-X3000-AP Access Points

Central AP Management

- SSID
- Wi-Fi Security
 - WPA2/WPA3 Personal and Enterprise
 - 802.1x Authentication
- VLAN Tagging
- Captive Portal
 - Click Through and Radius
- AP Firmware Upgrade

Monitor AP Wireless Clients

- Block Clients
- Client Status and Statistics

The DBR-700 delivers high-performance networking with a 2.5G WAN port and eight 2.5G ports for fast and reliable connectivity. Ideal for small offices and cafes, offering flexible and enough bandwidth for your network. With a 2Gbps firewall and IPsec VPN tunnels, it ensures secure remote access. Built-in Smart Office AP management simplifies wireless access point control, making it an excellent choice for businesses seeking flexible, easy to manage and secure network solutions.

Virtual Private Network (VPN)

A Virtual Private Network (VPN) ensures secure and private connections by encrypting data and using strong authentication. It creates a secure tunnel between users and networks, protecting sensitive information from unauthorised access. VPNs enable remote access, allowing employees to connect safely to their company network from any location, and offer robust security features like data integrity and traffic encryption, ensuring reliable and safe connectivity.

Complete 2.5G Interface

A complete 2.5G interface on the DBR-700 delivers ultra-fast speeds of up to 2.5Gigabits per second on each port, boosting VPN performance with quicker data transfers and lower latency. It supports multiple simultaneous connections, ensuring smooth, secure, and efficient remote access even during high-demand use. The added bandwidth is perfect for businesses needing reliable communication, large file transfers, and seamless video conferencing, all while maintaining strong encryption and security.

Reliable Dual WAN Redundancy

Dual WAN Intelligent Fail-over ensures uninterrupted Internet connectivity by automatically switching to a backup WAN connection if the primary one fails. This feature enhances network reliability and maintains consistent service, minimising downtime for critical operations. It also balances traffic across both WAN connections, optimising bandwidth and improving performance. With this system, organisations can rely on a robust backup to handle disruptions.



Multi-WAN 2.5G Smart Office Series VPN Router

WAN Load Balancing

WAN Load Balancing distributes traffic across multiple WAN connections to enhance performance and reliability. It optimises speed and ensures smooth data transmission for high-bandwidth applications by preventing overload on any single connection. Additionally, it provides backup connections for redundancy, maintaining continuity during failures and enabling uninterrupted business operations.

High-speed Network with SFP

SFP (Small Form-Factor Pluggable) ports provide versatile, high-speed fibre connections, ideal for long-distance data transmission. They support various fibre types, allowing networks to adapt to evolving needs while maintaining speed, stability, and scalability. This flexibility makes SFP ports a robust solution for data centres, enterprise networks, and Pro-AV systems, ensuring reliable, high-performance connectivity. The DBR-700 SFP port is compatible only with 2.5G SFP modules and requires a fixed 2.5G link rate on both ends.


Firewall Security

Robust firewall security protects your network from unauthorised access and cyber threats. It includes advanced features such as intrusion detection and prevention systems (IDS/IPS), content filtering, and stateful packet inspection (SPI). With real-time monitoring and automatic threat mitigation, it safeguards sensitive data and maintains a secure network environment for all connected devices.

AP Management

The DBR-X3000-AP Smart Office Access Point is managed through a Smart Office Series Business Router such as the DBR-700 and operates via a unified dashboard, providing a centralised approach to network management. This setup simplifies network settings' configuration, monitoring, and control, making administrative tasks more efficient. It ensures consistent policy enforcement while offering real-time insights into network activity, ultimately enhancing overall efficiency and security.

Connection Diagram

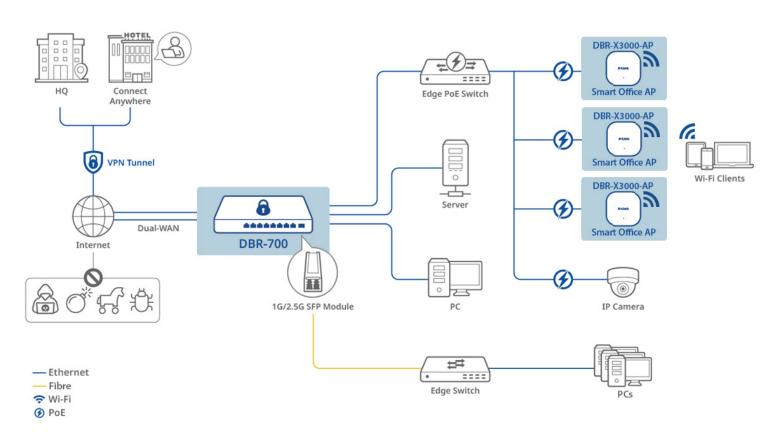

Multi-WAN 2.5G Smart Office Series VPN Router

| WAN Load Balance Network LAN & VLAN - DHCP Server - DMZ - VPN Pass-through - DDNS Routing - Static - RIPV1/v2 - SEcurity VPN Tunnel - PPTP/L2TP - IPSec - WireGuard - IPS/IDS - MAC/IP Filtering - SID Name - VLAN Tag Wi-Fi SEID - SSID Name - VLAN Tag Wi-Fi Security Wi-Fi SEcurity Wi-Fi SEcurity Wi-Fi SEcurity Wi-Fi SEcurity Wi-Fi SEcurity - SECURITY Wi-Fi SECURITY - SID Name - VLAN Tag Wi-Fi Security - WPA/WPA2/WPA3 Personal - Click Through - Cl | Technical Specifications | | |
|--|---------------------------|--|--|
| 1 x 10/10/01/00072.5G UAN PICT 1 x Power Connector 1 x 2.5G SFP 1 x Power Connector 1 x Power | General | | |
| Dynamic IP | Device Interfaces | • 1 x 10/100/1000/2.5G WAN/LAN Configurable ports • 6 x 10/100/1000/2.5G LAN port | 1 x Power Button1 x Power Connector |
| Ether-WANType | WAN | | |
| NATURE NOT SET IN THE NAME OF | Ether-WAN Type | • PPPoE | |
| Network LAN & VLAN DHCP Server - Port/Tag based VLAN - DMZ - Virtual Server - DDNS Routing - Static - OSPFv2 Security PPT Unnel - PPTP/LZTP - DenvPN - IPSec - WirreGuard - IPS/IDS - SPI Firewall - IPS/IDS - SPI Firewall - IPS/IDS - MAC/IP Filtering - URL Blocking APManagement Managed AP - Manages up to 15 x DBR-X3000-AP Smart Office Series Access Points Wi-Fi Security - WiPA/WPAZ/WPA3 Personal - SSID Name - VLAN Tag Wi-Fi Security - WiPA/WPAZ/WPA3 Personal - Click Through - RADIUS Monitoring Feature - Click Tips/IMAC - Clients Status and Statistics Device Firmware - Firmware Upgrade Performance Firewall Througput 400 Concurrent Session 200000 New Sessions (per second) Muon Max. IPsec VPN Tunnel 100 Max. PPTP/LZTP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature - 10 to 70°C Operating Temperature - 10 to 70°C Operating Temperature - 10 to 70°C Operating Humidity 10% to 90% non-condensing Dimensions 126 x 280 x 44 mm Ordering Informatior DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | WAN Failover | Dual Ether-WAN Failover | |
| LAN & VLAN | WAN Load Balance | Dual Ether-WAN Load Balance | |
| Port Forward Power Power Forward Power Power Forward Power Forward Power Power Forward Power Power Power Power Forward Power Pow | Network | | |
| POPT FORWARD PASS- through DDNS | LAN & VLAN | DHCP Server | Port/Tag based VLAN |
| Security VPN Tunnel PPTP/L2TP OpenVPN | Port Forward | • VPN Pass-through | • DDNS |
| PPTP/L2TP PSec | Routing | | |
| PPSC WireGuard PPSC PP | Security | | |
| #Frewall | VPN Tunnel | | · |
| Managed AP | Firewall | | |
| Wi-Fi SSID SID Name • VLAN Tag Wi-Fi Security • WPA/WPA2/WPA3 Personal • 802.1x Authentication Captive Portal • Click Through • RADIUS Monitoring Feature • Clients IP/MAC • Clients Status and Statistics Device Firmware • Firmware Upgrade Performance Firewall Througput 2450Mbps VPN Througput 400 Concurrent Session 200000 New Sessions (per second) 4000 Max. IPsec VPN Tunnel 100 Max. PPTP/LZTP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/ZA Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | AP Management | | |
| Wi-Fi Security | Managed AP | • Manages up to 15 x DBR-X3000-AP Smart Office Serie | s Access Points |
| Captive Portal | Wi-Fi SSID | • SSID Name | • VLAN Tag |
| Monitoring Feature • Clients IP/MAC • Clients Status and Statistics Device Firmware • Firmware Upgrade Performance Firewall Througput 2450Mbps VPN Througput 400 Concurrent Session 200000 New Sessions (per second) 4000 Max. IPSEC VPN Tunnel 100 Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Wi-Fi Security | • WPA/WPA2/WPA3 Personal | 802.1x Authentication |
| Device Firmware • Firmware Upgrade Performance Firewall Througput 2450Mbps VPN Througput 400 Concurrent Session 200000 New Sessions (per second) 4000 Max. IPsec VPN Tunnel 100 Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 99% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Captive Portal | Click Through | • RADIUS |
| Performance Firewall Througput 2450Mbps VPN Througput 400 Concurrent Session 200000 New Sessions (per second) 4000 Max. IPSec VPN Tunnel 100 Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Monitoring Feature | Clients IP/MAC | Clients Status and Statistics |
| Firewall Througput 2450Mbps VPN Througput 400 Concurrent Session 200000 New Sessions (per second) 4000 Max. IPsec VPN Tunnel 100 Max. PPTP/LZTP VPN Tunnel 32 No. of Firewall Policy 128 Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Device Firmware | Firmware Upgrade | |
| VPN Througput 400 Concurrent Session 200000 New Sessions (per second) 4000 Max. IPsec VPN Tunnel 100 Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Performance | | |
| Concurrent Session200000New Sessions (per second)4000Max. IPsec VPN Tunnel100Max. PPTP/L2TP VPN Tunnel32No. of Firewall Policy128PhysicalPower Input12V/2AOperating Temperature0 to 40°CStorage Temperature-10 to 70°COperating Humidity10% to 90% non-condensingStorage Humidity0% to 95% non-condensingDimensions126 x 280 x 44 mmOrdering InformationDBR-700Multi-WAN 2.5G Smart Office Series VPN Router | Firewall Througput | 2450Mbps | |
| New Sessions (per second) 4000 Max. IPsec VPN Tunnel 100 Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | VPN Througput | 400 | |
| Max. IPsec VPN Tunnel 100 Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Concurrent Session | 200000 | |
| Max. PPTP/L2TP VPN Tunnel 32 No. of Firewall Policy 128 Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | New Sessions (per second) | 4000 | |
| No. of Firewall Policy Physical Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Max. IPsec VPN Tunnel | 100 | |
| Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Max. PPTP/L2TP VPN Tunnel | 32 | |
| Power Input 12V/2A Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | No. of Firewall Policy | 128 | |
| Operating Temperature 0 to 40°C Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Physical | | |
| Storage Temperature -10 to 70°C Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Power Input | 12V/2A | |
| Operating Humidity 10% to 90% non-condensing Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Operating Temperature | 0 to 40°C | |
| Storage Humidity 0% to 95% non-condensing Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Storage Temperature | -10 to 70°C | |
| Dimensions 126 x 280 x 44 mm Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Operating Humidity | 10% to 90% non-condensing | |
| Ordering Information DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Storage Humidity | 0% to 95% non-condensing | |
| DBR-700 Multi-WAN 2.5G Smart Office Series VPN Router | Dimensions | 126 x 280 x 44 mm | |
| | Ordering Information | | |
| Barcode / UPC 790069480690 | DBR-700 | Multi-WAN 2.5G Smart Office Series VPN Router | |
| | Barcode / UPC | 790069480690 | |

^{1.} The DBR-700 SFP port is compatible only with 2.5G SFP modules and requires a fixed 2.5G link rate on both ends. 2. Console port is not operational and it is only used for special debugging purposes

