

D-Link F-Series AI Enabled Network Cameras

User Guide

ISSUE

V1.0

DATE

2025-05-28

About This Document

Purpose

This document describes the main functions and operations of the web interface for IP cameras. It includes instructions for:

- Network access
- Network configuration
- Troubleshooting

Intended Audience

This document is intended for the following users:

- Technical support engineers
- Maintenance engineers
- IP camera operators

Symbol Conventions

The following symbols are used in this document to indicate important safety information and tips:.

Symbol	Description
 DANGER	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.
 CAUTION	Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.
 NOTICE	Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss, performance deterioration, or unanticipated results. NOTICE is used to address practices not related to personal injury.
 NOTE	Highlights important information, best practices, or useful tips not related to personal injury, equipment damage, or environmental concerns.

Contents

About This Document.....	i
Contents	ii
1 Quick Overview	1
1.1 Login and Logout.....	1
1.2 Change Password	4
1.3 Homepage Layout	4
1.4 Playback	8
1.5 IVS Setting	10
2 Quick Start Settings	12
2.1 Local Network.....	12
2.2 Video.....	14
2.3 Display	17
2.3.1 Access the Display Settings	17
2.3.2 Mode	18
2.3.3 Image Setting	18
2.3.4 Scene Mode.....	19
2.3.5 Exposure	20
2.3.6 White Balance Setting.....	22
2.3.7 Day/Night.....	23
2.3.8 Noise Reduction.....	27
2.3.9 Image Enhancement.....	29
2.3.10 Zoom Focus (Only for Some Models)	30
2.4 OSD.....	32
2.5 Date and Time	35
3 System Settings	37
3.4 Settings.....	37
3.4.1 Device Information	37
3.4.2 Date and Time.....	39
3.4.3 System.....	39
3.4.4 Software Licenses	40
3.5 Change Password	40
3.6 Configure User.....	40
3.6.1 Add User	40
3.6.2 Online User	43
3.7 Query Device Logs	44
3.7.1 Query Operation Logs.....	44
3.7.2 Query Alarm Logs	45
3.7.3 Collect All Logs.....	46
3.8 Maintain the Device	48
3.8.1 Reboot Device.....	48
3.8.2 Upgrade the Software Package	49
3.8.3 Restore Device to Factory Settings	50
3.8.4 Export / Import Configuration	51

3.9 Configure Security	54
3.9.1 IP Filter	54
3.9.2 HTTPS Certificate	56
3.9.3 Security Services.....	57
4 Configure the Network Service	59
4.4 Basic Settings.....	59
4.4.1 Local Network	59
4.4.2 Device Port.....	59
4.4.3 Port Mapping	61
4.4.4 DDNS.....	62
4.4.5	64
4.4.6 Set PPPoE	64
4.5 Advanced Settings.....	66
4.5.1 Set FTP	66
4.5.2 Set SMTP	67
4.5.3 Set HTTPS	69
4.5.4 Procedure	70
4.5.5 Set QOS	70
4.5.6 Set 802.1x	71
4.5.7 Set SNMP	72
4.5.8 View ONVIF.....	75
4.5.9 Set Platform Access	77
4.5.10 Set Multicast Parameters.....	80
4.5.11 Set CGI Alarm Service Center.....	81
5 Configuration Video/Audio	84
5.4 Video.....	84
5.4.1 Set video	84
5.4.2 Snapshot.....	84
5.4.3 ROI Parameter	85
5.5 Audio.....	86
5.5.1 Audio	86
5.5.2 Audible File (Feature available only on certain models)	88
6 Configuration Image	90
6.4 Configure Display	90
6.5 Configure OSD	90
6.6 Configure the Privacy Mask.....	90
6.7 Configure Video Standard.....	92
7 Configure Event	93
7.4 Motion Alarm Linkage.....	93
7.5 Alarm In (Only for Some Models).....	96
7.6 Alarm Out (Only for Some Models)	99
7.7 Disk Alarm	100
7.8 Network Alarm	101
7.9 Day/Night Switch Alarm.....	101
7.10 Abnormal Sound Detection (Only for Some Models)	102
7.11 Push Message.....	103

7.12 Flashlight Alarm Output (Only for Some Models)	104
7.13 White Light Alarm Output	104
7.14 Red and Blue Light Alarm Output	105
8 Configure Storage Function.....	107
8.4 Record Strategy	107
8.5 Record Directory	108
8.5.2 Configure the SD Card	110
8.5.3 Configure the FTP	110
8.5.4 Configure the NAS	112
9 IVS Settings	114
9.4 Configure AI Multi-Target	114
9.5 Configure Intelligent Analysis	115
9.5.1 Intrusion	115
9.5.2 Smart Motion	119
9.5.3 Single Line Crossing	120
9.5.4 Double Line Crossing	121
9.5.5 Multi-Loitering	123
9.5.6 Wrong-Way	124
9.6 Configure People Counting	126
9.6.1 Setting	126
9.6.2 Report	128
10 PTZ	130
10.4 Configure PTZ	130
10.4.1 Control and Configure the PTZ (Only for Some Models)	130
10.4.2 Configure the PTZ	131
10.4.3 Configure and Invoke Home / Preset Positions	132
10.4.4 Configure and Invoke Tracks	134
10.4.5 Configure and Invoke Scans	135
10.4.6 Configure and Invoke Tours	136
10.4.7 Configure Idles	139
10.4.8 Configure Timer	139
10.4.9 Configure Power UP Action	140
10.4.10 Configure Intelligent Tracking	141
10.4.11 Dome PTZ	143
10.5 Configure PTZ Keyboard	143
10.6 Smoke and Flame Detection	145
11 Panoramic Cameras	148
11.4 CVBS Function (Only for Some Models)	148
11.5 Fisheye Camera	149
11.6 Dual-Lens	150
11.6.1 Dual-Lens	150
11.7 Panoramic Camera	151
11.7.1 RS458	151
11.7.1 IR Led Config	152
11.7.2 CVBS	153
11.8 For Special Cameras	154

11.8.1 General Parameters	154
11.8.2 Illegal Parking (Only for Some Models).....	155
11.8.3 Enter Area	156
11.8.4 Leave Area	156
11.8.5 Heat Map.....	157
Troubleshooting	160
Acronyms and Abbreviations.....	162

1 Quick Overview

1.1 Login and Logout



CAUTION

Use a supported browser such as Microsoft Edge, Chrome, or Firefox to access the web interface. Other browsers may result in limited functionality.

Login

Step 1 Open THE Chrome browser.

Step 2 Enter the IP address of the IP camera in the address bar (default: 192.168.0.120) and press **Enter**.


Step 3 On first login: You will be prompted to create a password. After setting the password, you will be directed to the login page.

Note: DHCP is enabled by default. Use the provided tool to search for the camera IP. Default IP: 192.168.0.120.

Important: After changing the password, wait at least 3 minutes before powering off the device to ensure the change is saved. Alternatively, log in again with the new password to verify.

- You can change the system language on the login page.
- Click **Login** to access the homepage.

Figure 1-1 Create password

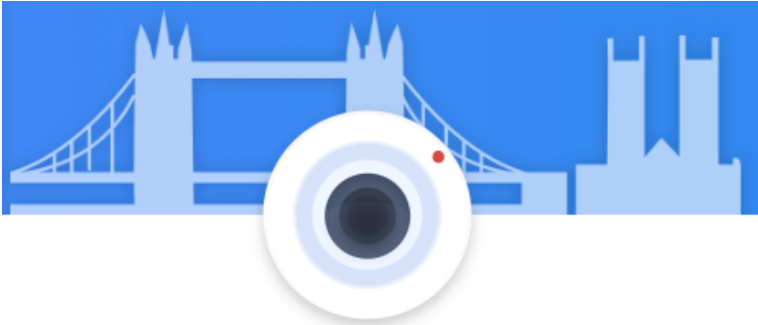

The image shows the 'Please Create Password' screen of the D-Link F-Series Camera web interface. At the top, there is a blue header with a white camera lens icon in the center. Below the header, the title 'Please Create Password' is displayed in bold black text. To the right of the title, there is a language dropdown menu set to 'English'. The form contains three input fields: 'User Name' with the default value 'admin', 'New Password' (which is currently empty and has a red border), and 'Confirm' (also empty). A red error message 'Please Input New Password' is visible below the 'New Password' field. At the bottom of the form is a blue 'Create' button.

English ▾

User Name

admin

New Password ?

|

Please Input New Password


Confirm

Create

Step 1 Enter your username and password to access the system, as shown in **Figure 1-2**.

- Default username: admin
- Password must be created during initial login.

Figure 1-2 Login page

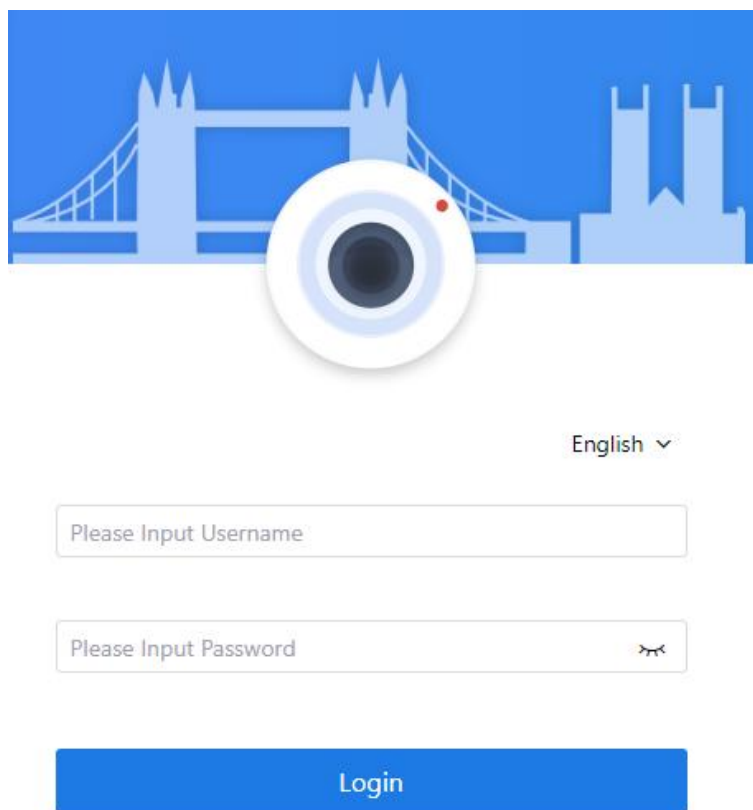The login page features a blue header with a stylized illustration of a bridge and a camera lens. Below the header, there is a language selector set to "English". Two input fields are provided: "Please Input Username" and "Please Input Password" (with a toggle for password visibility). A blue "Login" button is positioned at the bottom of the form.

 NOTE


Note: DHCP is enabled by default. Use the provided tool to search for the camera IP. Default IP: 192.168.0.120.

Important: After changing the password, wait at least 3 minutes before powering off the device to ensure the change is saved. Alternatively, log in again with the new password to verify.

- You can change the system language on the login page.

Step 2 Click **Login** to access the homepage.

Sign out



Click **Sign Out** in the upper right corner to return to login screen.

1.2 Change Password

Description

To change your password:

- Click your **username** in the upper right corner and select **Change Password**.
- Or go to **Setting > System > Change Password**.

Figure 1-3 Change the default password page

Procedure

Step 1 Enter the **old password**, **new password**, and **confirm** the new password.

Step 2 Click **OK**.

- A message like "Change your password success!" confirms the change.
- If the password change fails, a tip or error will be displayed (e.g., "Password must be at least 8 characters").

Step 3 It is recommended to wait three minutes before restarting the device after changing the password.

Step 4 Click **OK** to return to the login page.

1.3 Homepage Layout

The homepage allows you to:

- View real-time video
- Monitor alarms and faults
- Configure system settings
- Change your password
- Log out of the system

Refer to **Figure 1-4** for the layout and **Table 1-1** for descriptions.

Figure 1-4 Homepage layout

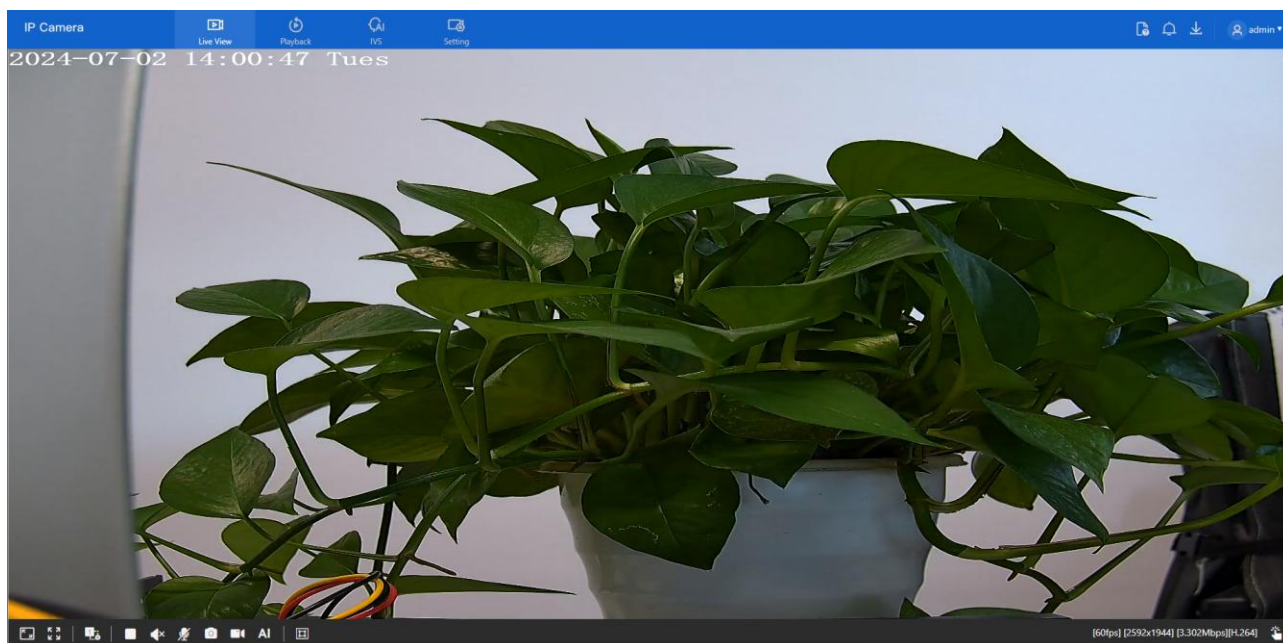



Figure 1-5 PTZ interface



Table 1-1 Elements on the homepage

No.	Element	Description
1	Live View	Displays real-time video streams.
2	Playback	Access recorded videos (requires SD card or NAS with recordings).
3	IVS setting	Configure AI multi-target features and intelligent analysis (e.g., intrusion, smart motion, single line crossing, double line crossing, multi-loitering, Wrong-Way, general parameters), people counting).

No.	Element	Description
4	Configuration •	Set parameters for Quick Start, System, Network, Audio/Video, Image, Event, and Storage.
5		About the intercom function.
6		Click  to view alarm alerts.
7		Displays SD card video backup and download progress.
8		Sign out, change password, view current user.
9		Zoom +/- zoom – (adjust zoom level).
10		Iris +/- iris – (adjust iris value).
11		Near focus /far focus
12		Auto focus
13	Image	Set brightness, saturation, contrast and sharpness.
14		Window scale, Adjust display scale for live video.
15		View live video in full-screen mode.
16		Switch between available stream modes (up to 3 depending on model).
17		Pause/Start or Stop live video playback.
18		Enable or disable audio output.
19		Two-way audio. Open or close intercom (the computer should be plugged in microphone prior).
20		Click the icon to snapshot the video and save the images to the specified location.
21		Record the video and save the file to the specified location.
22		View AI-detected targets (e.g., face, vehicle, human body).
23		Target Frame Intelligent marking Target frame: Show detection box around targets. Intelligent marking: Display IVS detection areas during live view.




No.	Element	Description
24		Display resolution, frame rate, bit rate, encoding type.
25		I/O output, control the I/O alarm output manually. Click  to open alarm or close the alarm
26		Open or close the flashing light manually (available only on special models).

Figure 1-6 About the intercom function

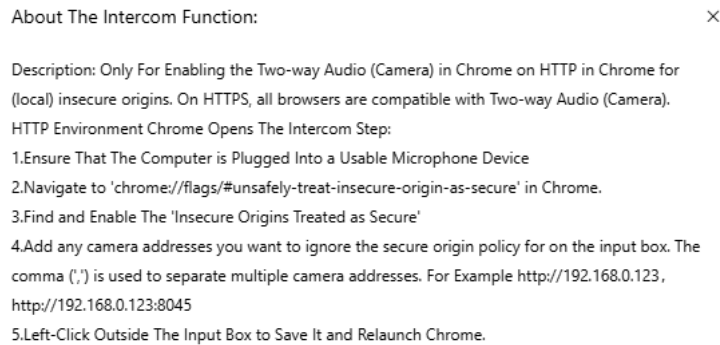


Note: The following instructions apply **only when using two-way audio (camera) in Chrome over HTTP** (insecure origin). For HTTPS connections, two-way audio is supported by all major browsers.

If using **Chrome on HTTP**, follow these steps to enable the intercom function:

1. Ensure your computer is connected to a **working microphone**.
2. Open Chrome and navigate to:
`chrome://flags/#unsafely-treat-insecure-origin-as-secure`
3. Enable the flag: **“Insecure origins treated as secure.”**
4. In the input box that appears, enter the IP addresses of the cameras you want to allow, separated by commas.
 - Example:
`http://192.168.0.123, http://192.168.1.250:8045`
5. Click outside the input box to save your changes.
6. **Relaunch Chrome** for the changes to take effect.

Figure 1-7 AI multi object interface

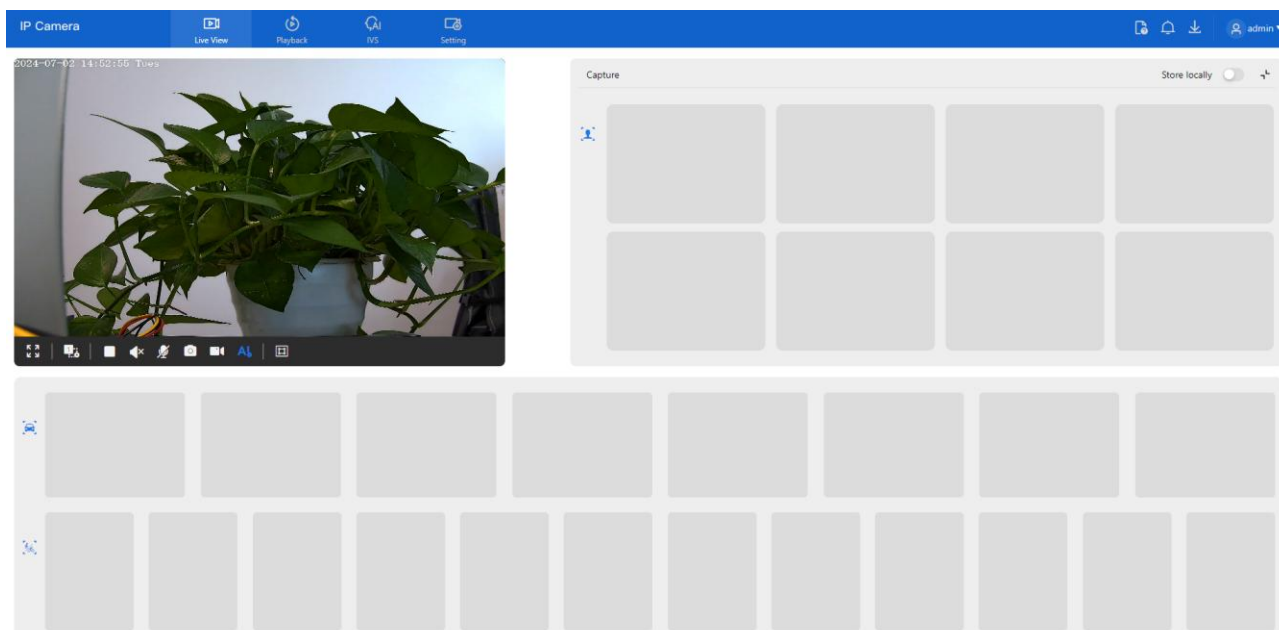

1.4 Playback

To review recorded footage:

1. Click **Playback** on the web interface.
2. If an SD card is installed and enabled, recordings will be available.

Refer to **Figure 1-8** for layout and controls.

Figure 1-8 Playback page



Table 1-2 Playback function

No.	Element	Description
1	Channel	Displays available video channels.
2	Calender	 Green dots indicate recorded days.
3	☒ Schedule Record ☒ All Types	All Types I/O Alarm Motion Alarm Day/Night Switch Alarm Abnormal Audio Alarm Intrusion Smart Motion Single Line Crossing Double Line Crossing Multi-Loitering The green timeline represents scheduled recording and the red timeline represents alarm recording. The types of alarm recording varies according to model performance.
4		Play one channel's recording.
5		Play two channels' recording.
6		Play four channels' recording.
7		Adjust playback scale.
8		View recording in full-screen mode.
9		Pause or resume playback.
10		Enable or disable audio playback.
11		Capture screenshots from the recording and save the images to a specified location.
12		Fast Forward, 1/16X, 1/8 X, 1/4 X, 1/2 X, 1 X, 2 X, 4 X, 8 X



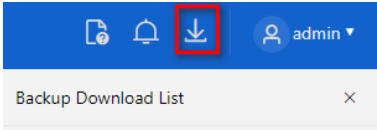
13		Click to begin video backup; select the duration; click again to stop. A dialog will prompt you to save or cancel. The pop-up window of tip as shown in Figure 1-9, click the save to save the video. Click Cancel to abandon.  Click the backup list to show the detail information.
14		Time view options: 1h, 6h, 12h, 24h.

Figure 1-9 Record backup tip

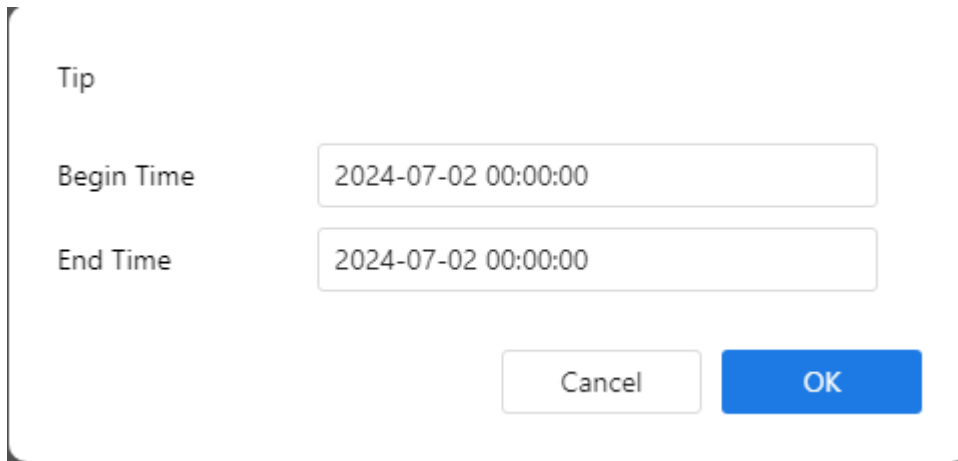

Tip

Begin Time

End Time


1.5 IVS Setting

Click **IVS** to access the IVS configuration page. You can configure:

- Deep learning settings
- Intelligent video analytics
- Behavior analysis features

Refer to **Figure 1-10** for the IVS setting layout.

Figure 1-10 IVS setting page

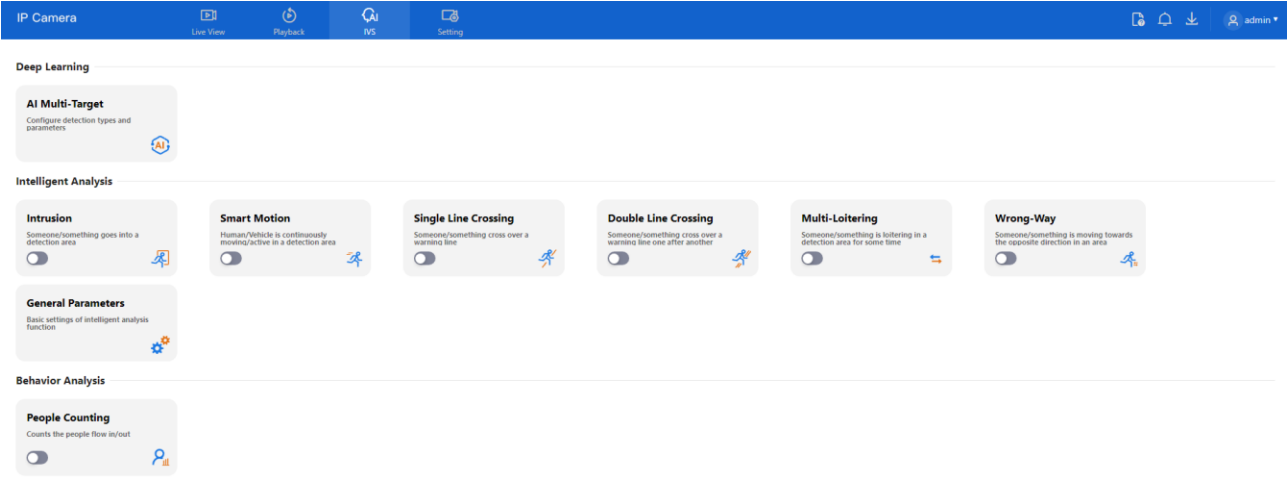

 NOTE

The IVS features vary by device model. Refer to the product specification for supported functionality.

2 Quick Start Settings

2.1 Local Network

Description

The local network settings include the following parameters:

- IP protocol
- IP address
- Subnet mask
- Default gateway
- Dynamic Host Configuration Protocol (DHCP)
- Preferred Domain Name System (DNS) server
- Alternate DNS server
- MTU (Maximum Transmission Unit)

Procedure

1. Navigate to **Setting > Quick Start > Local Network**. The **Local Network** page is displayed (see Figure 2-1).
2. Configure the parameters, as shown in Figure 2-1.

Figure 2-1 Local network page

The screenshot displays the 'Local Network' configuration page. The top navigation bar includes 'IP Camera' and icons for 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar is titled 'Quick Start' and lists various system categories. The 'Local Network' tab is active, showing a list of network parameters. Each parameter has a corresponding input field or toggle switch. The 'Apply' button is located at the bottom of the settings area.

Parameter	Value
Network Card ID	1
IP Protocol	IPv4
DHCP	Enabled
IP Address	192.168.0.120
DNS	Disabled
Preferred DNS Server	192.168.0.189
Alternate DNS Server	192.168.0.2
MTU	1500

Step 2 Set the parameters according to Table 2-1.

Table 2-1 Local network parameters

Parameter	Description	Setting
Network Card ID	--	[Default value] 1

Parameter	Description	Setting
IP Protocol	IPv4 is the IP protocol that uses an address length of 32 bits. IPv6 is the IP protocol that uses an address length of 64 bits.	[Setting method] Select a value from the drop-down list box. [Default value] IPv4
DHCP	Enable DHCP, and the device will automatically obtain the IP address from the DHCP server.	[Setting method] Click the button on to enable DHCP . NOTE To query the current IP address of the device, you must query it on the platform based on the device name.
IP Address	Device IP address that can be set as required.	[Setting method] Enter a value manually. [Default value] 192.168.0.120
Subnet Mask	DHCP is off. Subnet mask of the network adapter.	[Setting method] Enter a value manually. [Default value] 255.255.255.0
Default Gateway	DHCP is off. This parameter must be set if the client accesses the device through a gateway.	[Setting method] Enter a value manually. [Default value] 192.168.0.1
Preferred DNS Server	DNS is on. IP address of a DNS server.	[Setting method] Enter a value manually. [Default value] 192.168.0.1
Alternate DNS Server	DNS is on. IP address of a domain server. If the preferred DNS server is faulty, the device uses the alternate DNS server to resolve domain names.	[Setting method] Enter a value manually. [Default value] 192.168.0.2
MTU	Set the maximum value of network transmission data packets.	[Setting method] Enter a value manually. NOTE The MTU value is range from 1280 to 1500, the default value is 1500, Please do not change it arbitrarily.

Step 3 Click **Apply**.

- If the message "**Apply success!**" appears, the system saves the configuration and displays:
"Set network parameter success, please login system again."
Reconnect using the new IP address.
- If the message "**Parameter is invalid**" appears, please verify and correct the settings.

2.2 Video

Procedure

Step 1 Go to **Setting > Quick Start > Video**.

The **Video** settings page appears (see Figure 2-2).

Step 2 Configure the parameters according to **Table 2-2**.

Figure 2-2 Video setting page

Step 3 Set the parameters according to Table 2-2.

Table 2-2 Parameters of stream configuration

Parameter	Description	Setting
Stream ID	The device supports up to three video streams, depending on the model: • Stream 1 provides the highest video quality and performance. It is typically used for primary viewing and recording. • Stream 2 offers lower resolution options, suitable for bandwidth-limited scenarios or secondary viewing. • Stream 3 delivers the lowest resolution and is ideal for preview purposes or mobile access. Note: Some models support only two streams.	[Setting method] Select a value from the drop-down list box.

Parameter	Description	Setting
Name	Stream name. NOTE The stream name must consist of letters, numbers, and underscores. Only these characters are supported.	[Setting method] Enter a value manually. The value cannot exceed 32 bytes. [Default value] Stream 1
Video Encode Type	The video encoding type affects both image quality and the bandwidth required for streaming. The following encoding standards are supported: MJPEG MJPEG (Motion JPEG) is an intra-frame compression format. It delivers high image quality without mosaic artifacts during motion. However, it does not support inter-frame compression, resulting in larger file sizes. MJPEG consumes significant storage and bandwidth, making it unsuitable for continuous recording or long-duration video transmission. It is best suited for capturing and transmitting alarm snapshots. H.264 H.264 is a widely-used inter-frame compression standard available in three profiles: Base, Main, and High. H.264 High Profile offers the best compression efficiency but requires higher hardware decoding performance. H.264 Main Profile balances quality and performance. H.264 Base Profile has the lowest hardware requirements, suitable for devices with limited processing power. When using hardware decoders, select the profile according to the device's capabilities. H.265 H.265 is the next-generation video compression standard, improving upon H.264 with enhanced compression efficiency, better image quality, and more sophisticated algorithms. It significantly reduces bandwidth and storage usage while maintaining high visual fidelity, making it ideal for high-resolution and long-duration recording scenarios.	[Setting method] Select a value from the drop-down list box. [Default value] H.264 High Profile NOTE H.264 High Profile requires higher hardware decoding capability. Use Main or Base Profile for low-performance devices. Using MJPEG in Stream 1 may result in playback issues or FTP video upload errors.

Parameter	Description	Setting
Audio Encode Type	The following audio encode standards are supported: ☐ G711_ULAW: mainly used in North America and Japan. ☐ G711_ALAW: mainly used in Europe and other areas. ☐ RAW_PCM: encode of the original audio data. This encode is often used for platform data.	[Setting method] Select a value from the drop-down list box.
Resolution	A higher resolution means better image quality. NOTE IP cameras support different resolutions based on the model.	[Setting method] Select a value from the drop-down list box.
Frame Rate(fps)	Frame rate is the number of images, snapshots, or frames that a camera can take per second. The frames per second determine the smoothness of a video. A video whose frame rate is higher than 22.5 f/s is considered as smooth by human eyes. Frame rates for different frequencies are as follows: ☐ 50 Hz: 1–25 f/s ☐ 60 Hz: 1–30 f/s NOTE The frequency is set on the Device Configuration > Camera page. The biggest MJPEG coding format frame rate is 12 frames per second.	[Setting method] Select a value from the drop-down list
I Frame Interval(f)	I frame do not require other frames to decode. A smaller I frame interval means better video quality but higher bandwidth.	[Setting method] Select a value from the drop-down list
Bit Rate Type	The bit rate is the number of bits transmitted per unit of time. The following bit rate types are supported: ☐ Constant bit rate (CBR) The compression speed is fast; however, improper bit rate may cause vague motion images. ☐ Variable bit rate (VBR) The bit rate changes according to the image complexity. The encoding efficiency is high and the definition of motion images can be ensured.	[Setting method] Select a value from the drop-down list box.
Bit Rate Range	Indicates the maximal value of the bit rate. the different models may have different ranges, please refer to actual product.	[Setting method] Enter a value manually.
Image Quality	The video quality the camera output.	[Setting method] Select a value from the drop-down list box.

Parameter	Description	Setting
Smart Encode	Smart Encode. ☐ Smart encode includes H.264 & H.265. ☐ The storage space will be reduced fifty percent when smart encode is enabled. ☐ Only main stream supports smart encode.	[Setting method] Click the button on to enable Smart Encode.

Step 4 Click **Apply**.

- If you see "**Apply success!**", the settings are saved.
- If "**Apply failed!**" appears, ensure you have *Parameter Configure* permissions (see **Section 3.3 Configure User**).
- If a **bit rate error** is shown, enter a valid bit rate value.


2.3 Display

2.3.1 Access the Display Settings

Procedure:

Step 1 Navigate to **Setting > Quick Start > Display**.
The **Image Settings** page appears.

Figure 2-3 Image settings page

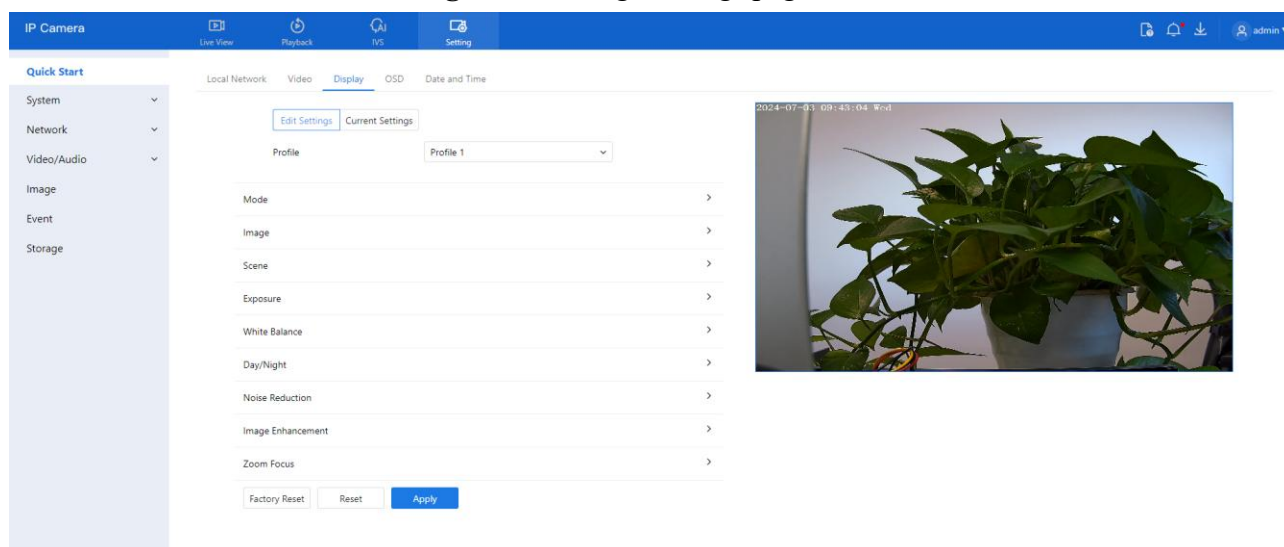

Step 2 Click **Edit Settings** under the **Mode** item to configure display profiles. Up to four profiles can be set.

NOTE

- All image settings can be modified in **Edit Settings**.
- Factory Reset restores all parameters to factory defaults.
- **Reset** reverts settings to the last saved state..


2.3.2 Mode

Procedure:

Step 1 Go to **Setting > Quick Start > Display > Mode**.

The **Mode** page appears, as shown in Figure 2-4.

Figure 2-4 Mode page

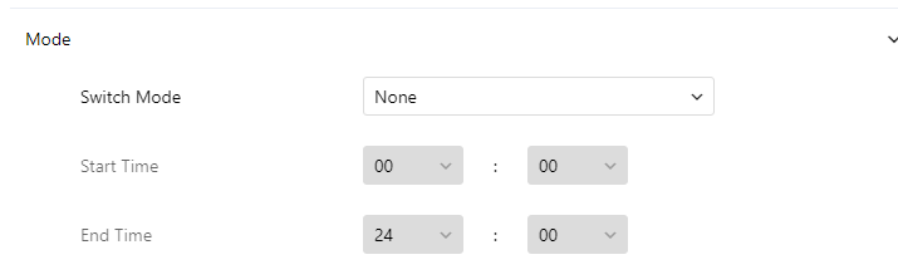

Step 2 Click **Switch Mode**. Three options are available:

- **None:** Uses the current active profile with no switching.
- **Time Mode:** Automatically switches profiles at specific times. Set all four profiles in advance.
- **Day/Night (D/N) Linkage Mode:** Automatically switches between day and night profiles based on lighting.

Step 3 Set the **Start Time** and **End Time** for switching.

Step 4 Click **Apply** to save your settings.

2.3.3 Image Setting

Procedure:

Step 1 Navigate to **Setting > Quick Start > Display > Image**.

The Image Settings page appears as shown in Figure 2-5.

Figure 2-5 Image setting page



Table 2-3 Describes the **image setting** parameters.

Table 2-3 Parameters of image settings parameters

Parameter	Description	Configuration Method
Brightness	Controls image brightness.	[Setting method] Drag the slider. [Default value] 50

Parameter	Description	Configuration Method
Saturation	Controls image color richness.	[Setting method] Drag the slider. [Default value] 50
Sharpness	Controls image clarity.	[Setting method] Drag the slider. [Default value] 50
Contrast	Adjusts contrast between dark and bright areas.	[Setting method] Drag the slider. [Default value] 50

Step 2 Click **Apply** to save your settings.


2.3.4 Scene Mode

Procedure:

Step 1 Go to **Setting > Quick Start > Display > Scene**

Step 2 The Scene Mode page appears as shown in Figure 2-6.

Figure 2-6 Scene mode page

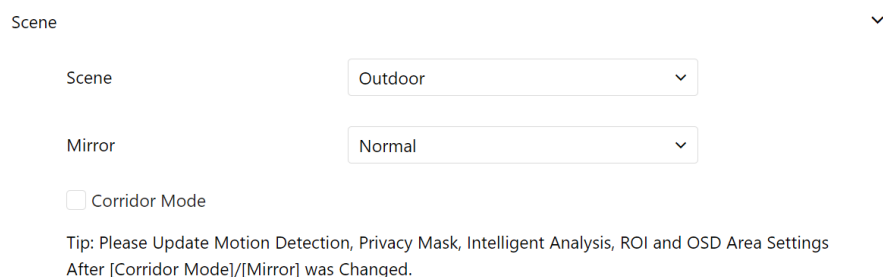

Scene ▼

Scene Outdoor ▼

Mirror Normal ▼

☐ Corridor Mode

Tip: Please Update Motion Detection, Privacy Mask, Intelligent Analysis, ROI and OSD Area Settings
After [Corridor Mode]/[Mirror] was Changed.

Table 2-4 describes the FFC mode parameters.

Table 2-4 Parameters of FFC

Parameter	Description	Configuration Method
Scene	It indicates the working mode of camera. ☐ Outdoor: Suitable for outdoor use. ☐ Indoor: Suitable for indoor use.	[Configuration method] Select from the drop-down list [Default value] Outdoor

Parameter	Description	Configuration Method
Mirror	It is used to select the pixel location of an image. ☐ Normal: The image does not flip. ☐ Horizontal: The image flips to the left and right. ☐ Vertical: The image flips up and down. ☐ Horizontal and vertical: The image rotates at 180° degrees.	[Setting method] Select a value from the drop-down list. [Default value] Normal
Corridor Mode	The image rotates 90° degrees clockwise when aisle mode is enabled. On some models, using Stream 2/3 with H.264/H.265 at CIF or QVGA resolution may prevent live view playback.	[Setting method] Tick the corridor mode. [Default value] Disable

Step 3 Click **Apply** to save the setting.

2.3.5 Exposure

Procedure:

Step 1 Navigate to **Setting > Quick Start > Display > Exposure**.

The **Exposure** page appears (see Figures 2-7 and 2-8 for IP cameras and high-speed domes, respectively).

Step 2 Configure the parameters listed in **Table 2-5**.

Figure 2-7 Exposure interface for IP camera

Exposure

Metering Mode

Full Metering

Exposure Mode

Auto

Max Shutter

1/60

Max Gain

—

+

50

Figure 2-8 Exposure Interface for high-speed home

Exposure

Metering Mode

Full Metering

Exposure Mode

Auto

Max Shutter

1/30

Max Gain

—

+

50

Iris

F1.6

Table 2-5 describes Exposure parameters.

Table 2-5 Parameters of exposure

Parameter	Meaning	Configuration Method
Exposure Mode	The exposure modes include: ☐ Auto: The system performs auto exposure based on the monitoring environment. ☐ Manual: You can adjust the brightness of an image by setting the following three items: Shutter Setting, Iris Setting and Gain Setting. ☐ Shutter Priority: You can set Shutter Setting to fixed values. The iris and gain are automatically adjusted by the system. ☐ Iris Priority (for high-speed dome): You can set Iris Setting to fixed values. The shutter and gain are automatically adjusted by the system.	[Setting method] Select a value from the drop-down list. [Default value] Auto
Meter Mode	It is used to select the metering area. ☐ Fulling Metering: During metering, all areas of an image have equal weight, that is, all areas are involved in the metering. Spot Metering: During metering, the central spot of an image has the highest weight. ☐ Partial Metering: During metering, the middle area (1/2 of the total area) of an image has the highest weight, and other areas have the lowest weight.	[Setting method] Select a value from the drop-down list. [Default value] Whole
Max Shutter	The device automatically adjusts the shutter time based on the ambient brightness. The shutter time is less than or equal to the value of this parameter.	[Setting method] Select a value from the drop-down list. [Default value] 1/25
Max Gain	The device automatically adjusts the gain based on the external light. The gain is less than or equal to the value of this parameter.	[Setting method] Drag the slider. [Default value] 50
Iris (for high speed dome)	It is valid in manual mode and iris priority mode. You can adjust the brightness of an image by setting the iris. As the value increases, the brightness increases (when the shutter and gain remain the same). However, the camera movement automatically adjusts the shutter and gain in this mode. Therefore, the brightness of an image may not increase when you increase the iris.	[Setting method] Select a value from the drop-down list. [Default value] F1.6

Parameter	Meaning	Configuration Method
Iris (for IP camera)	It is used to control the light admitted to the lens. The auto iris can be set to either of the following states: ☐ Auto The iris is automatically adjusted to control the light admitted to the lens. ☐ Open fully The iris is fully open.	[Setting method] Select a value from the drop-down list. [Default value] Auto
Iris Speed	It indicates the auto adjustment speed of the iris. As the value increases, the speed increases. Excessive speed may cause instability.  NOTE This parameter is valid when the auto iris is enabled.	[Setting method] Drag the slider. [Default value] 50
Fixed Gain	When the exposure Mode is Manual, you can set the fixed gain.	[Setting method] Drag the slider. [Default value] 50


Step 3 Click **Apply** to save the setting.

2.3.6 White Balance Setting

Procedure:

Step 1 Navigate to **Setting > Quick Start > Display > White Balance**.
The **White Balance** page appears as shown in Figure 2-9.

Figure 2-9 White balance settings page

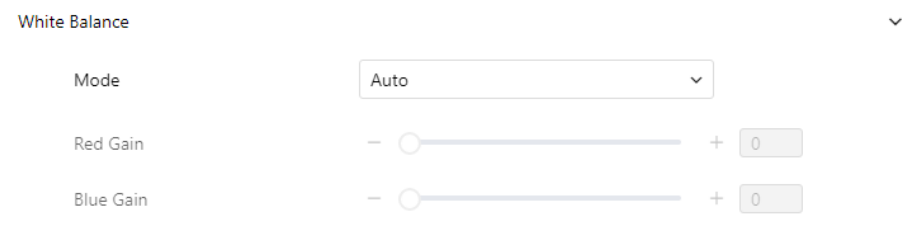

White Balance

Mode: Auto

Red Gain: - [Slider] + 0

Blue Gain: - [Slider] + 0

Table 2-6 White Balance (WB) Parameters

Parameter	Meaning	Configuration Method
Mode	Select a white balance mode to improve color accuracy based on lighting conditions: ☐ Auto: The system automatically adjusts based on the environment. ☐ Tungsten: For incandescent lighting. ☐ Fluorescent: For fluorescent lighting. ☐ Daylight: For natural sunlight. ☐ Shadow: For shaded areas. ☐ Manual: Manually configure WB mode based on the monitoring environment.	[Setting method] Select a value from the drop-down list. [Default value] Auto
Red Gain	Adjusts the intensity of red tones. Increasing this value lowers the color temperature.  NOTE Available only in Manual Mode with Customized selected.	[Setting method] Drag the slider. [Default value] 0
Blue Gain	Adjust the intensity of blue tones. Increasing this value raises the color temperature (image becomes cooler).  NOTE Available only in Manual Mode with Customized selected.	[Setting method] Drag the slider. [Default value] 0

Step 2 Click **Apply** to save the setting.

2.3.7 Day/Night

Procedure:

Step 1 Navigate to **Setting > Quick Start > Display > Day/Night**.

The **Day/Night** settings page appears. Display options may vary by device model (see Figure 2-10).

Figure 2-10 Day/Night page (timer)

Day/Night ▼

Setting	Timer ▼
DTN Time	18 ▼ : 00 ▼
NTD Time	06 ▼ : 00 ▼
Illumination	IR LED ▼
IR LED	Auto ▼
Strength	—  + 50
☐ Anti Overexposure	

Figure 2-11 Day/Night mode page (auto)

Day/Night ▼

Setting	Auto ▼
Delay	—  + 5 S
Sensitivity	—  + 50
Illumination	IR LED ▼
IR LED	Auto ▼
Strength	—  + 50
☐ Anti Overexposure	

Step 2 Configure the parameters listed in **Table 2-7**.

Table 2-7 Parameters of Day/Night

Parameter	Meaning	Configuration Method
D/N Setting Mode	It can be set to Auto, Day, Night or Timer. ☐ Auto mode The image color and filter status automatically switch based on the ambient brightness. The filter keeps infrared light from reaching the sensor during the day; The filter allows all light to reach the sensor at night. ☐ Day mode Forces the camera to stay in color mode. The IR filter remains active, blocking infrared light from reaching the sensor. ☐ Night mode Forces the camera to display in black and white. The IR filter is disabled, allowing infrared light to reach the sensor for better night vision. ☐ Timer Automatically switches between Day and Night modes based on a user-defined schedule.	[Setting method] Select a value from the drop-down list. [Default value] Auto
D/N Switch Sensitivity	Adjusts the sensitivity of day-to-night switching. A higher value causes the system to switch at lower light levels.  NOTE This parameter is valid in auto mode.	[Setting method] Drag the slider. [Default value] 50
TRANSL. (D->N) (dB)	High-Speed Dome Gain threshold for switching from Day to Night in Auto mode. The system enters Night mode when gain exceeds this value.  NOTE This parameter is valid in auto mode. The value of TRANSL.(D->N) must be greater than the value of TRANSL.(N->D).	[Setting method] Drag the slider. [Default value] 70
TRANSL. (N->D) (dB)	High-speed Dome Gain threshold for switching from Night to Day. The system enters Day mode when gain drops below this value.  NOTE This parameter is valid in auto mode. The value of TRANSL.(D->N) must be greater than the value of TRANSL.(N->D).	[Setting method] Drag the slider. [Default value] 30

Parameter	Meaning	Configuration Method
Delay(s)	Delay time (in seconds) for switching between Day and Night.  NOTE This parameter is valid in auto mode.	[Setting method] Drag the slider. [Default value] 0
Light Mode	Specifies the lighting mode based on the camera model: IR LED White LED Intelligent Dual Light (uses IR and White LED based on condition) None	[Setting method] Select a value from the drop-down list.
IR LED	Auto: The infrared lamp is enabled or disabled based on the external environment identified by the light dependent resistor (LDR). ON: The system enters the night mode forcibly. OFF: The infrared lamp is disabled. The filter and image color are switched based on the external environment identified by the LDR.  NOTE This parameter is valid in auto mode.	[Setting method] Select a value from the drop-down list. [Default value] Auto
Strength	Controls IR LED brightness. Higher values produce brighter night images.	[Setting method] Drag the slider. [Default value] 50
DTN Time	Time to switch from Day to Night.	[Setting method] Select a value from the drop-down list. [Default value] 18:00
NTD Time	Time to switch from Night to Day.	[Setting method] Select a value from the drop-down list. [Default value] 6:00

Fill light settings

The camera's fill light supports four modes:

1. **Intelligent Dual Light** – Automatically switches from IR to white light during alarms, then reverts after 30 seconds.
2. **Warm Light** – Uses only white light for nighttime illumination.
3. **Infrared Lamp** – Uses IR light only.
4. **Close** – Disables the fill light. The image remains in the last active mode.

Modes of Operation

- **Day Mode:** Used in well-lit environments where the image remains in color. No fill light is needed.
- **Night Mode:** Used in low-light environments with the fill light enabled.
- **Auto Mode:** Automatically adjusts the fill light based on ambient lighting.
- **Timer Mode:** Allows you to define the active time for Day mode.

Brightness Adjustment

- **Automatic Mode:** Adjusts fill light brightness automatically based on environment.
- **Manual Mode:** You can manually set the brightness using the slider or input value.

2.3.8 Noise Reduction

Procedure:

Step 1 Go to **Setting > Quick Start > Display > Noise Reduction**.

Step 2 The Noise Reduction interface will appear (see Figure 2-12).

There are two modes available for noise reduction: **Auto** and **Manual**.

- **Auto Mode:** The system automatically adjusts noise reduction levels based on ambient conditions.
- **Manual Mode:** You can set a fixed level of noise reduction.

Figure 2-12 Noise reduction page (auto)

Noise Reduction

☒ 2D NR

Auto

Max Strength -  + 50

☒ 3D NR

Auto

Max Strength -  + 50

Figure 2-13 Noise reduction page (manual)

Noise Reduction

☒ 2D NR

Manual

Fixed Strength — +

☒ 3D NR

Manual

Fixed Strength — +

Table 2-8 describes the Noise Reduction parameters.

Table 2-8 Parameters of noise reduction

Parameter	Meaning	Configuration Method
2D NR	Reduces noise of image.	[Configuration method] Select from the drop-down list [Default value] Auto
3D NR	Reduces noise of image.	[Configuration method] Select from the drop-down list [Default value] Auto

Parameter	Meaning	Configuration Method
Max Strength	Applicable only in auto noise filter mode. When set to 0, noise reduction is disabled. When set above 0, the system automatically adjusts the noise reduction level based on ambient brightness, but will not exceed the configured value.	[Setting method] Drag the slider. [Default value] 50
Fixed Strength	Applicable only in manual noise filter mode.	[Setting method] Drag the slider. [Default value] 50

Step 3 Click **Apply** to save the setting.

2.3.9 Image Enhancement

Procedure:

Step 1 Go to **Setting > Quick Start > Display > Image Enhancement**.

Step 2 Adjust the parameters listed in Table 2-9.

Figure 2-14 Image Enhancement page

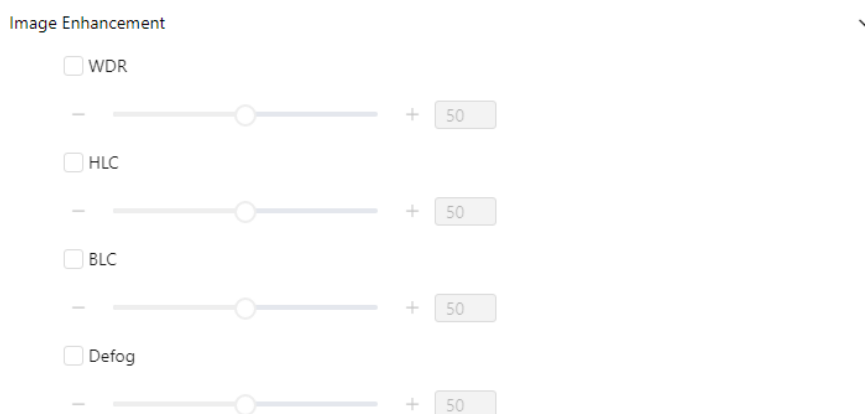


Table 2-9 Parameters of enhance image

Parameter	Meaning	Configuration Method
WDR	Enhances image quality in scenes with strong lighting contrast between foreground and background. When brightness contrast is high, increasing the WDR level improves image quality. Both bright and dark areas.	[Setting method] Tick the WDR mode and drag the slider. [Default value] 50
HLC	Reduces the intensity of overly bright areas to improve visibility of objects in front of light sources (e.g., headlights). Reduces total brightness to enhance clarity of highlighted regions.	[Setting method] Tick the HLC mode and drag the slider. [Default value] 50
BLC	Increases overall brightness to make objects in front of backlit scenes more visible. May cause overexposure of the background.	[Setting method] Tick the BLC mode and drag the slider. [Default value] 50
Anti-shake	Reduces slight shaking or jitter in the image caused by minor camera movement.	[Setting method] Tick the Anti-shake mode.
DeFog	Enhances image clarity in foggy or hazy environments. Higher values increase visibility. Note: Available only on some models.	[Setting method] Tick the Defog mode and drag the slider. [Default value] 50

Step 3 Click **Apply** to save the settings.

2.3.10 Zoom Focus (Only for Some Models)

Procedure:

Step 1 Navigate to **Setting > Quick Start > Display > Zoom Focus**.

The **Zoom Focus** interface appears (see Figure 2-15 for IP cameras and Figure 2-16 for high-speed domes).

Step 2 Configure the parameters listed in **Table 2-10**.

Figure 2-15 Zoom focus page for IP camera 1

Zoom Focus

[-] Zoom In Zoom Out [Square Icon]

[+]Auto Focus Once

Lens Initialization

☐ D/N Auto Focus

Factory Reset Reset Apply

Figure 2-16 Zoom focus interface for high speed dome

Zoom Focus

☐ Digital Zoom

Focus Mode Semi-Automatic

Auto Focus Sensitivity - 50 +

The shortest focus distance 6m

Factory Reset Reset Apply

Table 2-10 Parameters of zoom focus

Parameter	Meaning	Configuration Method
D/N Auto Focus	Enables auto focus when switching between Day and Night modes.	[Setting method] Tick the Auto focus.
Auto Focus Once	Triggers auto focus one time.	[Setting method] Click the button.
Initial	Returns the camera lens to its initial position.	[Setting method] Click the button.
Digital	Enables digital zoom after 37x optical zoom is reached.	[Setting method] Tick the Digital.
Focus Mode	Sets the focus mode: Auto: System automatically adjusts focus based on the scene. Manual: User manually adjusts focus using on-screen controls. Semi-Automatic: Auto focus is triggered once when the PTZ moves or zooms in.	[Configuration method] Select from the drop-down list [Default value] Semi-automatic

Parameter	Meaning	Configuration Method
Auto Focus Sensitivity	Controls how easily the system re-focuses when changes occur in the image. Higher sensitivity means the camera will re-focus with minor scene changes.	[Setting method] Drag the slider. [Default value] 50
The Least Focus Distance	Defines the minimum distance at which the camera can focus. If the object is closer than this distance, the camera will not focus on it. Example: If set to 1.5 meters, objects must be more than 1.5 meters away to be in focus.  NOTE Applicable only to visible light.	[Configuration method] Select from the drop-down list [Default value] 3 m

Step 3 Click **Apply** to save the settings.

2.4 OSD

Description

The **On-Screen Display (OSD)** function allows you to overlay information on video streams, including:

- Device name
- Channel ID and name
- Time
- Customized content

You can drag and reposition OSD elements on the screen.

Note: When the resolution is set to D1 or CIF, OSD supports up to **22 characters**.
OSD supports **Simplified Chinese, English, numbers, and select special characters**.


Procedure

Step 1 Go to **Setting > Quick Start > OSD**.

The OSD page is displayed (see Figure 2-17).

Step 2 Configure the parameters listed in **Table 2-11**.

Figure 2-17 OSD (standard cameras)

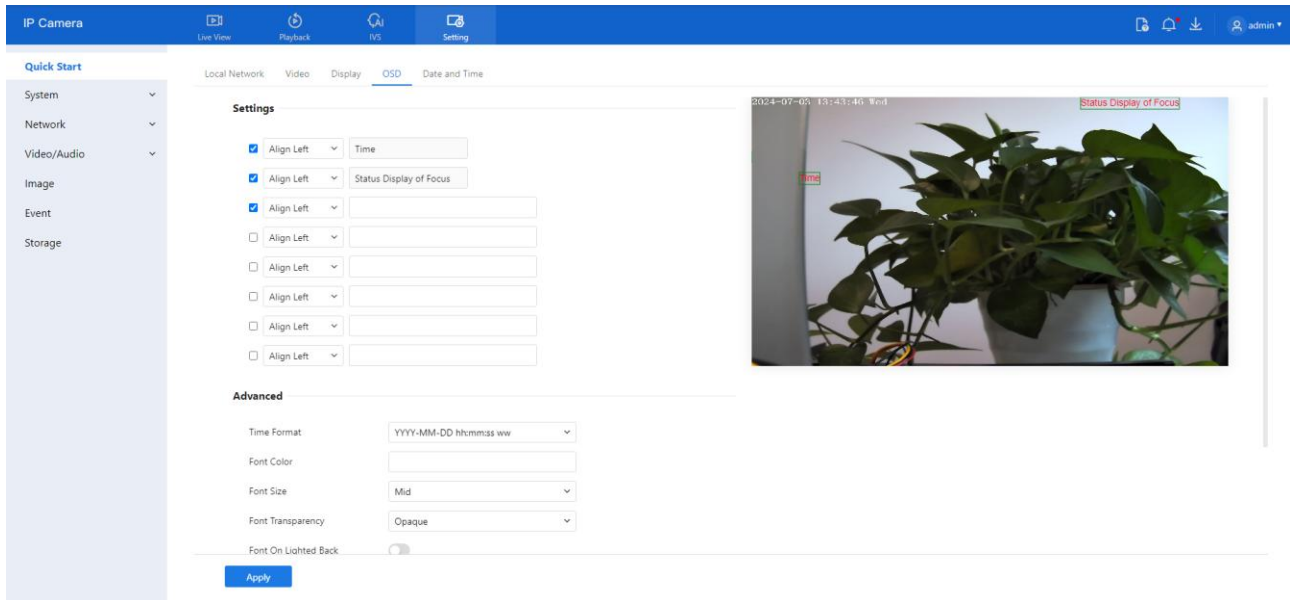

NOTE

Up to **seven OSD display areas** can be configured.

Table 2-11 Parameters of OSD

Parameter	Description	Setting
Time	Enables display of the system time.	[Setting method] Tick the time.
Focusing on the State	Displays focusing status. NOTE: Available only for cameras with auto-focus lenses.	[Setting method] Tick the Focusing on the state.
Custom OSD	Allows you to add a custom line of text.	[Setting method] 1. Tick the custom OSD list. 2. Enter the characters. Click  to save the value.
Time Format	Defines the display format of the time.	[Setting method] Select a value from the drop-down list box. [Default value] YYYY-MM-DD hh:mm:ss ww

Parameter	Description	Setting
Font Color	Sets the color of the displayed text.	[Setting method] Select a value from the drop-down list box. [Default value] Blank
Font Size	Sets the size of the text.	[Setting method] Select a value from the drop-down list box. [Default value] Mid
Font Transparency	Controls the transparency of the OSD text.	[Setting method] Select a value from the drop-down list box. [Default value] Opaque
Font on Lighted Back	Enables background lighting for better text visibility.	[Setting method] Click the button on to enable Font on lighted back .
Device Name	Displays the device name in the video.	[Setting method] Click the button on to enable Device Name
PTZ Position	Only used for PTZ cameras	[Setting method] Click the button on to enable
PTZ Action		[Setting method] Click the button on to enable
PTZ Temperature		[Setting method] Click the button on to enable
Status Display of Focus	Shows live focusing status on screen.	[Setting method] Click the button on to enable
Twelve-hour System	Enables 12-hour clock format.	[Setting method] Click the button on to enable

Parameter	Description	Setting
Display Week	Enables display of the current weekday.	[Setting method] Click the button on to enable

Step 3 Click **Advanced** to configure additional options such as:

- Time Format
- Font Color
- Font Transparency
- Font Background

Step 4 Click **Apply**.

The message "**Apply success!**" confirms that the settings have been saved.

2.5 Date and Time

Description

The **Date and Time** page allows you to configure the system's date, time, and synchronization settings. The following parameters can be adjusted:

- Time zone and Daylight Saving Time (DST)
- Date and time (manual or synchronized)
- Network Time Protocol (NTP) server settings

Procedure

Step 1 Go to **Setting > Quick Start > Date and Time**.

The **Date and Time** page appears, as shown in Figure 2-18.

Step 2 Configure the parameters listed in Table 2-12.

Figure 2-18 Date and time page

The screenshot displays the 'Date and Time' configuration page in the D-Link IP Camera web interface. The top navigation bar includes 'IP Camera' and icons for 'Live View', 'Playback', 'IVS', and 'Setting'. A left sidebar under 'Quick Start' lists 'System', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main area features tabs for 'Local Network', 'Video', 'Display', 'OSD', and 'Date and Time'. The 'Date and Time' tab is selected, showing the following settings: 'Time Zone' set to '(GMT) Greenwich Mean Time : Dublin, Edinburgh, Lisbon, London'; 'Device Time' at '2024-07-03 13:55:10'; 'Set Manually' with a date/time input of '2024-07-03 13:52:58'; 'Synchronize with PC time' as an unchecked checkbox; 'NTP' as a disabled toggle; and 'Daylight Savings Time' as a disabled toggle. An 'Apply' button is located at the bottom of the settings area.

Table 2-12 Parameters of date and time

Parameter	Description	Setting
Time Zone	Sets the time zone of the device. N/A	[Setting method] Select a value from the drop-down list box. [Default value] Greenwich mean time
Device Time	Displays the current time on the device.	[Setting method] ☐ Synchronize the time from the PC. Enter a value manually.
Set Manually	You can set the device time manually or synchronize with PC time.	[Setting method] Click Set Manually and set the date and time in the format <i>YYYY-MM-DD HH:MM:SS</i> .
NTP	IP address or domain name of the NTP server.	[Setting method] Click the button on to enable NTP and enter a value manually.
Server Address	NTP is enabled. The NTP server IP.	[Setting method] Enter a value manually.
Port	NTP is enabled. Port number of the NTP server.	[Setting method] Enter a value manually. [Default value] 123
Interval	NTP is enabled. Set time interval to check if the device time has synchronized with the NTP server time.	[Setting method] Enter a value manually. [Default value] 60
Daylight Saving Time	Adjusts the device time for DST: - When DST starts, the device time is moved forward by one hour. - When DST ends, the device time is moved back by one hour.	[Setting method] Click the button on to enable Daylight Saving Time .

Step 3 Click **Apply** to save the settings. If the message "**Apply success!**" appears, the settings have been saved successfully.

3 System Settings

3.4 Settings

3.4.1 Device Information

Description

The **Device Information** page displays the following system details:

- Device ID, name, type, model, manufacturer name, and MAC address
- Hardware version and software version
- Video channel count, alarm input/output channel count, serial port count, and number of network cards



NOTE

- The device name is the only editable field.
- All other parameters are view-only.
- Device information updates automatically after a software upgrade

Procedure

Step 1 Go to **Setting > System > Settings > Device Info.**

The **Device Info** page is displayed, as shown in Figure 3-1.

Figure 3-1 Device info page

Device Info	
Device ID	154578
Device Name	
MAC Address	00:1C:27:15:45:78
Camera Type	AI_MULTIOBJECT
Product Model	SN-IPR8055AKAN-Z2.7-13.5-23
Manufacturer Name	IPCamera
Hardware Version	V220064_22
Firmware Version	t5.0.1603.1006.3.0.2.6.0
Uboot Version	v2.1
Kernel Version	v3.0_20240624
Channel Quantity	1
Alarm Input Quantity	1
Alarm Output Quantity	1
Serial Port Quantity	0
Network Card Quantity	1

Apply

Step 2 View the system information and set the **Device Name** as needed, according to Table 3-1.

Table 3-1 Parameters of device

Parameter	Description	Setting
Device ID	A unique identifier used for platform management.	[Setting method] The parameter cannot be modified.
QR Code	The code and code characters. NOTE Available on some models.	Click the icon to enlarge the code.
P2P	Enables peer-to-peer (P2P) connection. When the device's P2P status is "Online", users can manage it via mobile apps. NOTE Available on some models.	[Setting method] Enable
Device Name	The name used to identify the device. NOTE Maximum length is 32 bytes or 10 Simplified Chinese characters . Modification fails if exceeded.	[Setting method] Enter a value manually.
MAC Address	It shows the performance of camera	[Setting method] These parameters cannot be modified.
Camera Type		
Product Model		
Manufacturer Name		
Hardware Version		
Firmware Version		
Uboot version		
Kernel version		
Video Channel(s)		
Channel Quantity		
Alarm Input Quantity		
Alarm Output Quantity		
Serial Port Quantity		

Parameter	Description	Setting
Network card Quantity		

Step 3 Click **Apply**.

- If the message "**Apply success!**" appears, the settings have been saved.
- If "**Apply failed!**" appears, you must request **Parameter Configure** permissions from an administrator.

3.4.2 Date and Time

The detailed information, please refer to **Chapter 2.5**

3.4.3 System


Procedure:

Step 1 Go to **Setting > System > Settings > System**.

The **System** page is displayed (see Figure 3-2).

Step 2 Choose the language from the drop-down list.

Figure 3-2 System

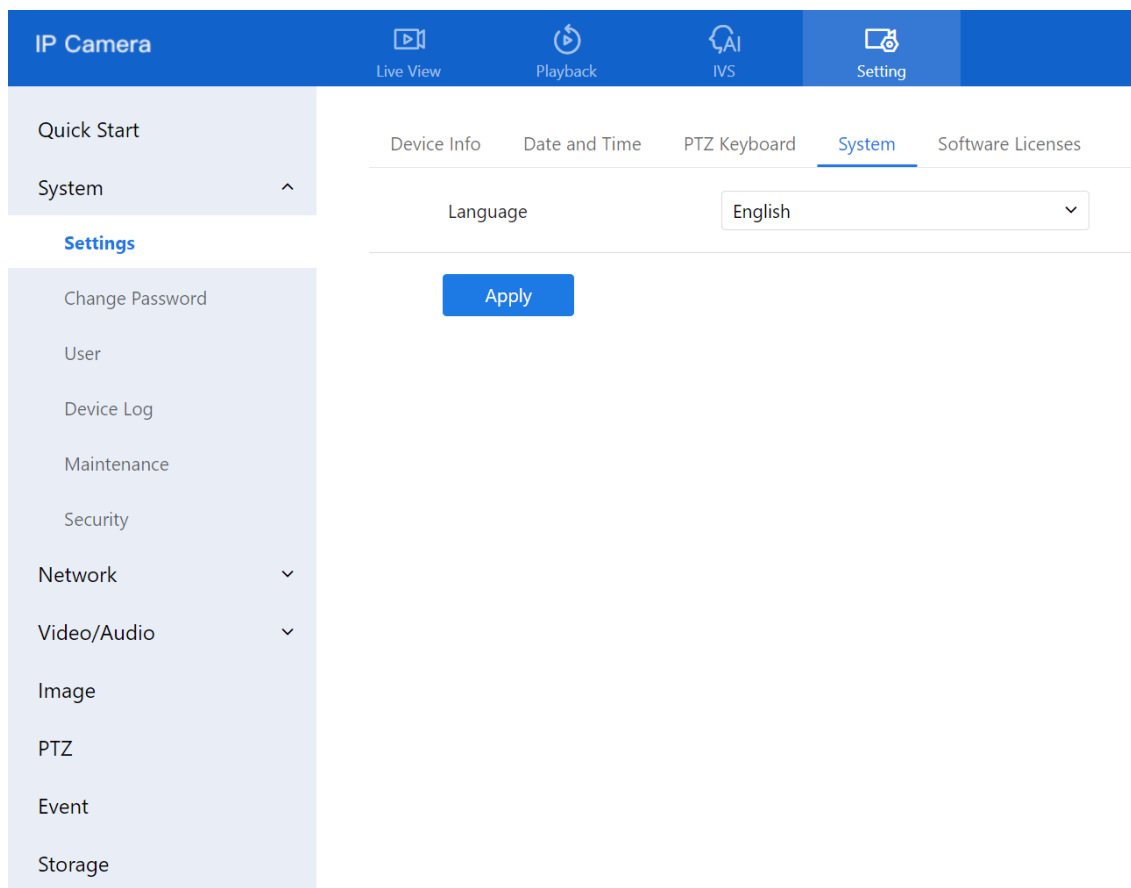


3.4.4 Software Licenses

Procedure

Step 1 Go to **Setting > System > Settings > Software Licenses**.

The **Software Licenses** page is displayed, as shown in Figure 3-3.

Figure 3-3 Software licenses page

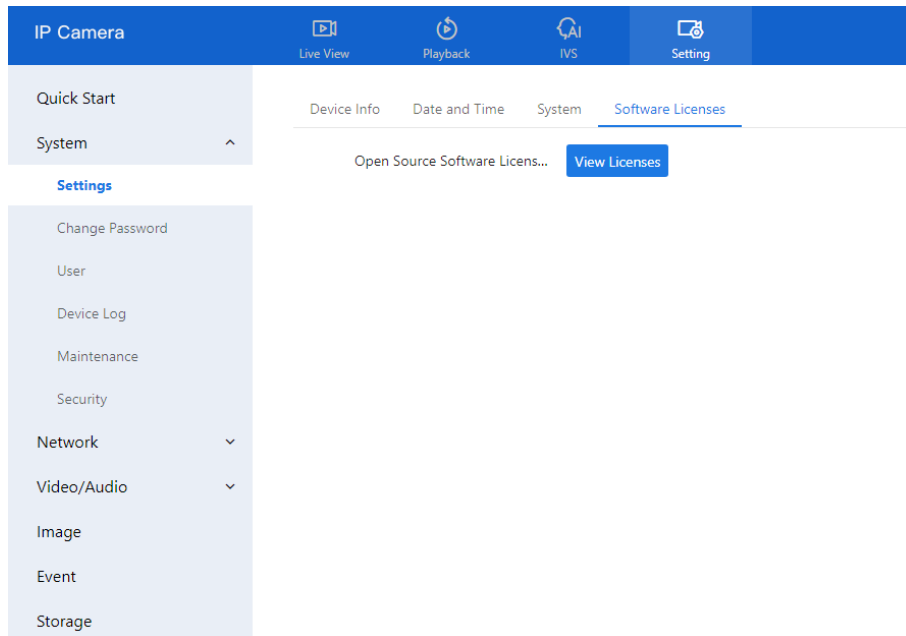

Step 2 Click **View Licenses** to display the list of open-source software licenses used in the system.

3.5 Change Password

1.2 For detailed information, please refer to **Chapter 1.2**.

3.6 Configure User

3.6.1 Add User

Description


This function allows you to add, modify, or delete users in the **Privilege Manager** section.

Procedure

Step 1 Navigate to **Setting > System > User**.

The **User** page is displayed, as shown in Figure 3-4. Table 3-2 describes the parameters.

Figure 3-4 User page

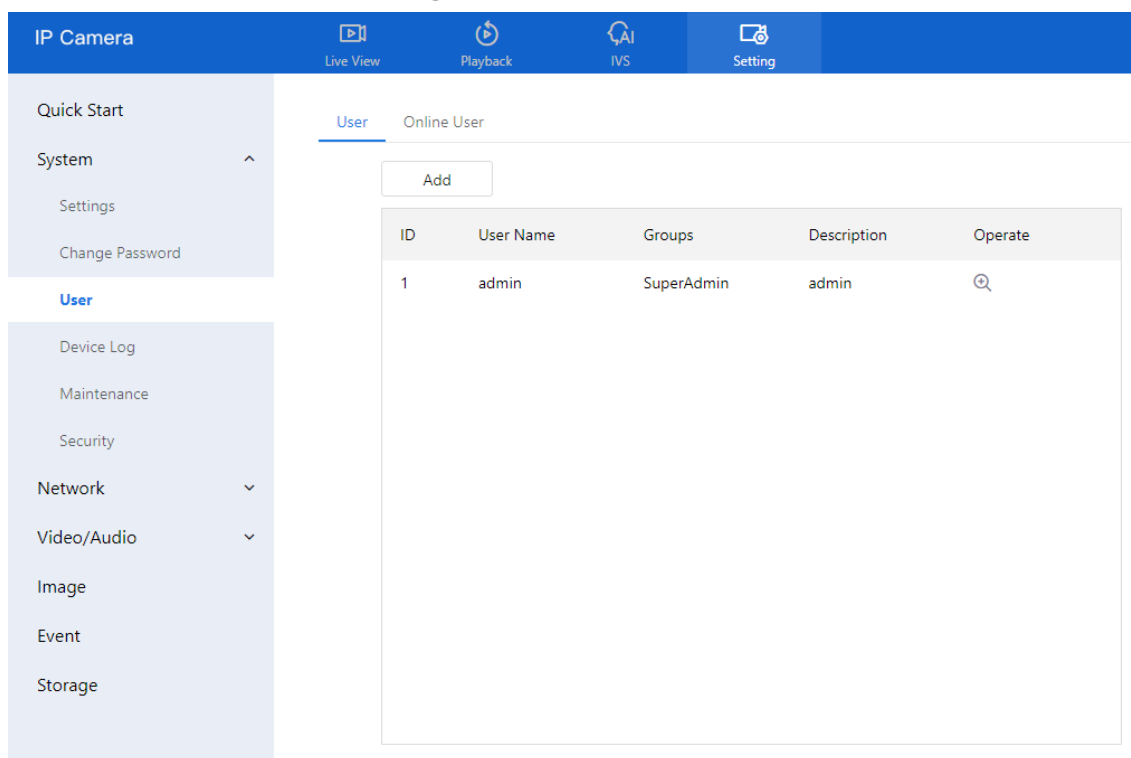

Step 2 Add, modify, or delete users as needed.

Table 3-2 Parameters of user

Parameter	Description	Setting
ID	User ID	User ID (not configurable).
User Name	Name used to log in to the camera.	[Setting method] Select a value from the drop-down list box.
Groups	Specifies the user group. Default groups include: Super Admin: Full access to all system features Administrators: Access to live video, playback, PTZ, audio, system, log, record policies, disk config, privilege, and parameter settings Operator: Access to live video, playback, PTZ, parameter config, and maintenance Media User: Live video only	[Setting method] Click Add , then select a value from the drop-down list box.

Parameter	Description	Setting
Notes	Optional notes for the user.	[Setting method] Click Add , then enter a value manually.
Operate	Actions include view, modify, and delete. NOTE Super Admin can be viewed only.	[Setting method] Click the icon as required.

Table 3-3 Operation description

Function	Procedure	Description
Add	- Click Add. The Add User page is displayed, as shown in Figure 3-5. - Enter a user name, password, confirm password. - Select a group from the drop-down list box. - Enter the notes (Optional). - Check the privilege. - Click OK. The user is added successfully.	Add an administrator or a common user as shown in Figure 3-5.
Modify	- Click . The Modify User page is displayed. - Modify the user name, password, group or privilege. - Click OK. The user is modified successfully. The User page is displayed.	Modify the user name, password, group or privilege.
Delete	Click the  icon. When prompted with "Confirm to delete?", click OK	Deletes a user.

Figure 3-5 Add user page

User Online User

← Add User

User Name

Password ?

Confirm Password

Level ▼

Notes

Privilege	Privilege Description
☒ Live Video	
☒ Video Control	
☒ PTZ Control	
☒ Audio	
☒ Playback	
☒ Backup	
☒ Record Strategy	
☒ Disk Config	
☒ Privilege Manager	
☒ Parameter Configuration	
☒ System Maintenance	
☒ Log	



NOTE

Click the privilege list to view a detailed breakdown of functions associated with each user group.


3.6.2 Online User

Procedure

Step 1 Navigate to **Setting > System > User > Online User**. The **Online User** page is displayed, as shown in Figure 3-6.

Step 2 View all users currently connected to the system in real time.

Figure 3-6 Online user

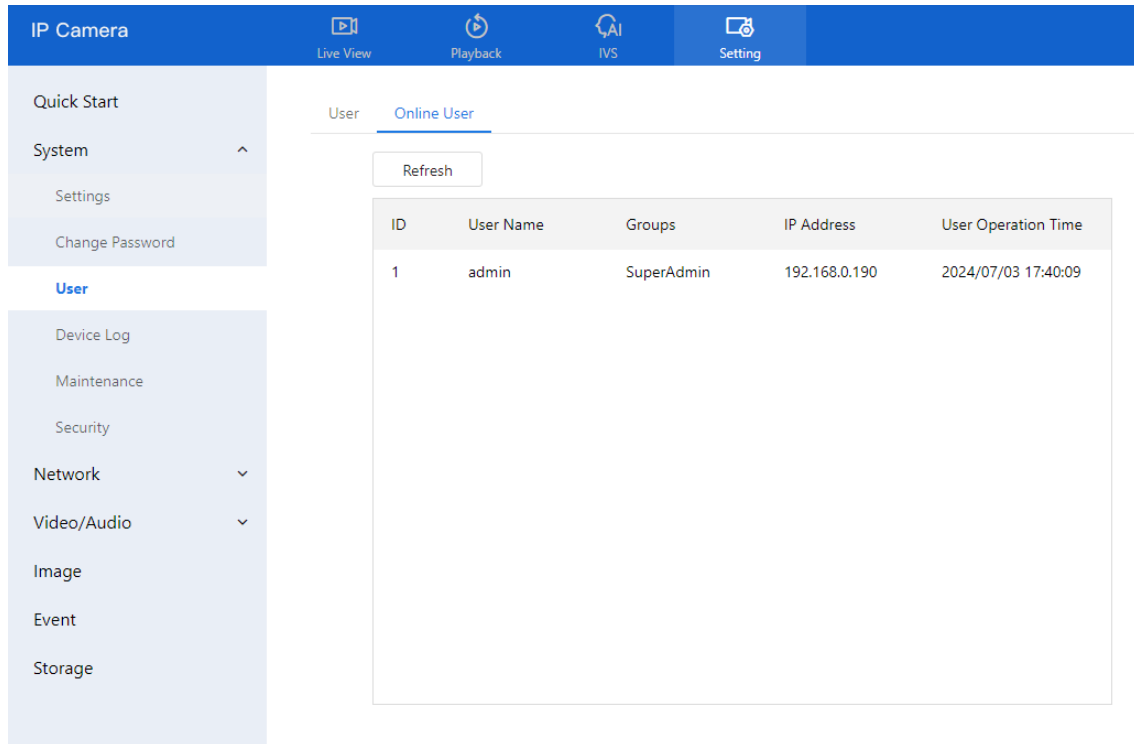

3.7 Query Device Logs

3.7.1 Query Operation Logs

Description

The operation log records user actions and scheduled task instructions during device operation. These logs are categorized as follows:

- Privilege manager
- System maintenance
- Device operations
- Recording operations
- Video control
- Live video

Procedure

Step 1 Navigate to **Setting > System > Device Log > Operation Log**.
The **Operation Log** page appears, as shown in Figure 3-7.

Figure 3-7 Operation log page

IP Camera

Live View Playback IVS Setting

Quick Start

System ^

Settings

Change Password

User

Device Log

Maintenance

Security

Network v

Video/Audio v

Image

Event

Storage

Operation Log Alarm Log Collect All Logs

Operation Log All Types

Start Time 2024-07-02 17:58:54

End Time 2024-07-03 17:58:54

Download Search

Time	User Name	Log Info
------	-----------	----------

< >

Step 2 Set the query conditions.

- Select the type of operation logs from the **Operation Log** drop-down list.
 - Click the **Begin Time** and **End Time** text boxes to display the time selection panel, and set the desired time range.
 - Select the username from the **User Name** drop-down list.
- Step 3 Click **Search**. The logs matching the specified criteria are displayed.

Download the operation logs.

To download logs:

Step 1 Select the log type.

Step 2 Set the **start time**, **end time**, and **log type**.

Step 3 Click **Download**.

Step 4 The log Excel file will be saved automatically to the browser's default download path.

3.7.2 Query Alarm Logs

Description

Alarm logs capture events triggered by system alerts, including:

- Security alarms
- Disk alarms

- Recording alarms
- Intelligent analysis alarms

Procedure

Step 1 Navigate to **Setting > System > Device Log > Alarm Log**.
The **Alarm Log** page appears, as shown in Figure 3-8.

Figure 3-8 Alarm log page

Alarm Begin Time	Alarm End Time	Log Info	Source ID
2024-07-03 14:47:18	2024-07-03 15:18:26	Motion Detect Alarm	1
2024-07-03 14:46:54	2024-07-03 14:47:04	Record Storage Failed	1
2024-07-03 14:19:53	2024-07-03 14:44:34	Motion Detect Alarm	1
2024-07-03 14:14:27	2024-07-03 14:14:47	Motion Detect Alarm	1
2024-07-03 14:10:35	2024-07-03 14:10:45	Motion Detect Alarm	1
2024-07-03 13:57:39	2024-07-03 14:07:32	Motion Detect Alarm	1
2024-07-03 13:41:40	2024-07-03 13:56:36	Motion Detect Alarm	1
2024-07-03 13:17:38	2024-07-03 13:40:15	Motion Detect Alarm	1
2024-07-03 12:19:03	2024-07-03 13:16:25	Motion Detect Alarm	1
2024-07-03 12:16:26	2024-07-03 12:16:56	Motion Detect Alarm	1

Step 2 Set the search conditions.

- Click the **Begin Time** and **End Time** text boxes to set the time range.
- Select the alarm type from the **Alarm Type** drop-down list.

Step 3 Click **Search**.

The alarm logs of the specified type are displayed.

Step 4 Download the alarm logs.

1. Select a log type.
2. Set the start time and end time.
3. Click **Download** to download the logs.
4. The excel file will be saved to the default download path of browser.

3.7.3 Collect All Logs

Description

This feature allows you to download all logs related to the device for troubleshooting and analysis.
Log types include:

- Device overview


- Key parameters
- Operation logs
- Alarm logs
- Upgrade logs
- Debugging logs

Procedure

Step 1 Navigate to **Setting > System > Device Log > Collect All Log**.

The **Collect Log** page appears, as shown in Figure 3-9.

Figure 3-9 Collect log page

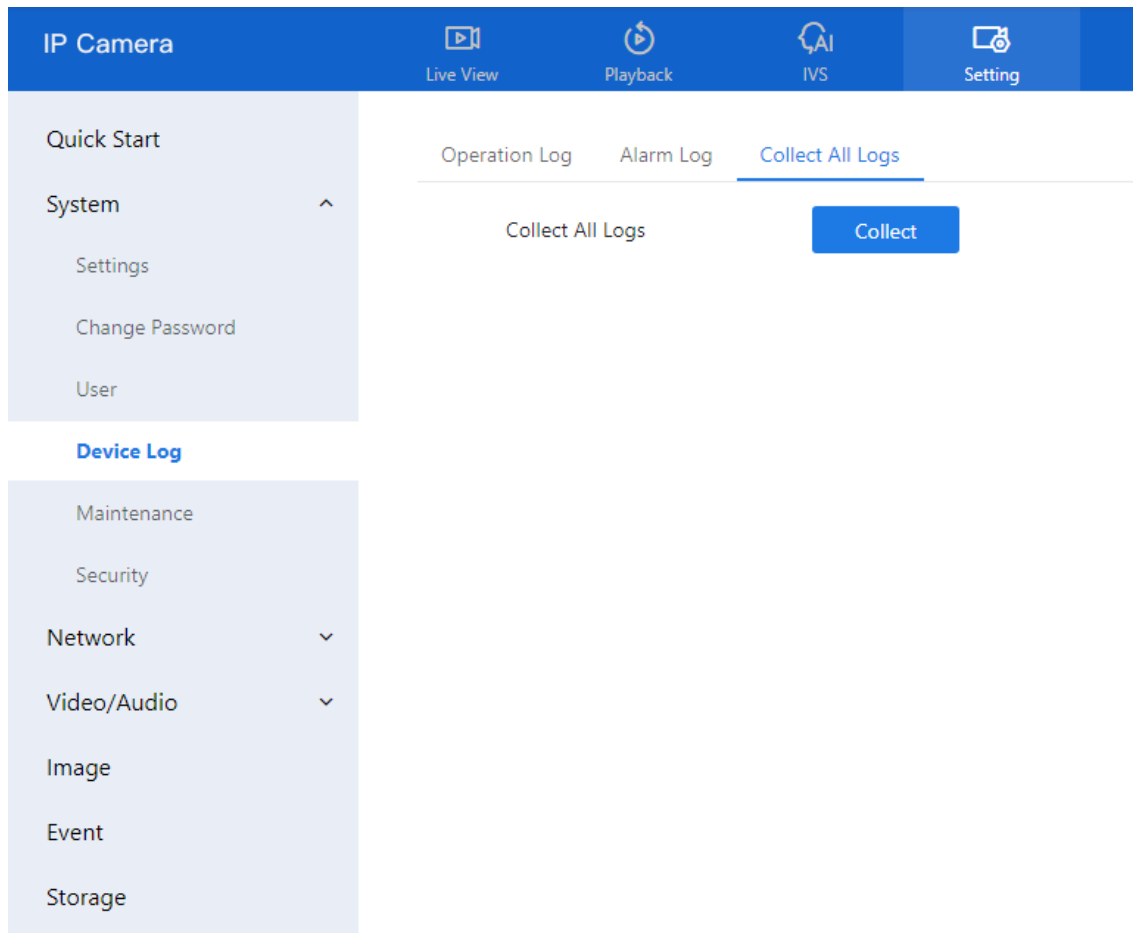

Step 2 Collect logs with one click.

1. Click **Collect**, a download pop-up window will appear.
2. The log file will automatically be saved to the browser's default download location.

3.8 Maintain the Device

3.8.1 Reboot Device

Description

Use this feature to reboot the device in scenarios including, but not limited to:

- Device parameters have been configured incorrectly, causing improper operation.
- A parameter reset is needed for the changes to take effect.
- Remote reboot is required for maintenance or troubleshooting.

Procedure

Step 1 Navigate to **Setting > System > Maintenance > Reboot**.

The **Camera Maintenance** page is displayed as shown in Figure 3-10.

Figure 3-10 Reboot device page

The screenshot shows the 'Reboot' page within the 'Maintenance' section of the camera's web interface. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar lists 'Quick Start', 'System', 'Settings', 'Change Password', 'User', 'Device Log', and a 'Maintenance' section with sub-items: 'Security', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area has tabs for 'Reboot', 'Upgrade', 'Restore', and 'Import/Export Configuration'. Under the 'Reboot' tab, there are two sections: 'Manual Reboot' and 'Auto Reboot'. The 'Manual Reboot' section has a 'Reboot The Device' label and a 'Reboot' button. The 'Auto Reboot' section includes an 'Auto Restart' toggle switch (currently off), a 'Reboot Interval' dropdown menu set to 'Everyday', and a 'Time' section with two dropdown menus both set to '0'. An 'Apply' button is located at the bottom of the 'Auto Reboot' section.

Step 2 Click **Reboot**.

- A confirmation message appears: "**Are you sure to restart?**"
- Click **OK** to proceed.

Step 3 The device will restart successfully within approximately **five minutes**.

Auto Reboot Configuration:

You can also configure the device to reboot automatically at scheduled intervals.

Step 1 Enable **Auto Reboot** by checking the appropriate option.

Step 2 Choose the desired **reboot interval** from the drop-down list:

- **Every Day**
- **Every Week**
- **Every Month**

Figure 3-11 Camera auto restart

Auto Reboot

Auto Restart ☒

Reboot Interval Everyday ▾

Time 0 ▾ 0 ▾

Apply

Step 3 Click **Apply**. The auto reboot schedule will take effect, and settings will be saved.

3.8.2 Upgrade the Software Package


Description

You can upgrade the device software package through the web interface. This process ensures the device runs the latest version with improved features or resolved issues.

Procedure

Step 1 Navigate to **Setting > System > Maintenance > Upgrade**.
The **Upgrade** page is displayed.

Figure 3-12 Update file

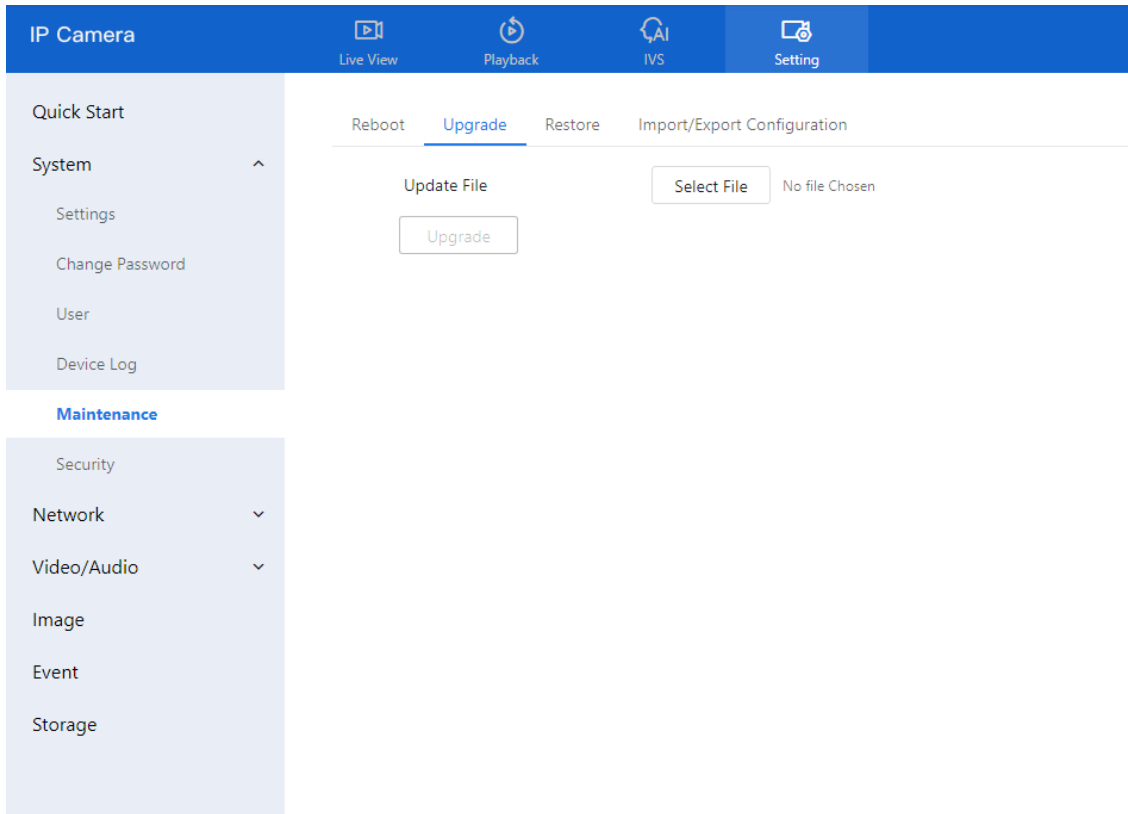

Step 2 Click **Select File** to browse and choose the appropriate upgrade file.

Step 3 Click **Update** to begin the upgrade process..

If the message "**Updating, please wait a few minutes, and do not close the browser**" is displayed:

- The upgrade is in progress.
- The device will automatically reboot after the update completes.

If another message is displayed, ensure you have selected the correct upgrade package and try again.



CAUTION

Do **not** power off the camera during the upgrade process.
Power failure during an upgrade may result in device malfunction.

3.8.3 Restore Device to Factory Settings

Description

You can restore the device to its factory default settings. This feature is recommended in the following scenarios:

- The device configuration is incorrect, causing operational issues

- You want to reset all parameters
- A clean factory default state is required for troubleshooting



CAUTION

After clicking **Restore**, all configuration settings will be reset to factory defaults.


You may choose whether or not to retain the current IP address.

Use function carefully.

Procedure

- Step 1 Navigate to **Setting > System > Maintenance > Restore**.
The **Restore** page is displayed.

Figure 3-13 Restore device

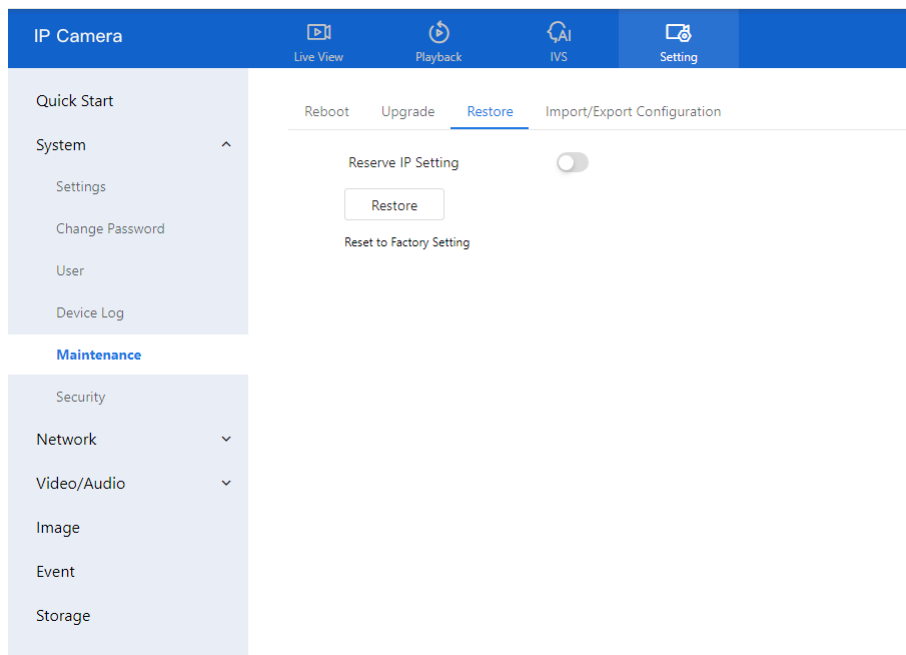

- Step 2 Click **Restore**. The message "Are you sure to restore?" is displayed.

- Step 3 Click **OK**. The device begins restoring to its factory default settings. After the process completes, the device will reboot with factory defaults applied.

3.8.4 Export / Import Configuration

Description

This feature allows you to back up the current configuration and restore it later. You can export the settings to a local hard drive and import the same configuration to:

- The current device
- Other cameras of the same model

The configuration file is saved as **config.bin**.

Procedure

Export Configuration

Step 1 Navigate to **Setting > System > Maintenance > Import/Export Configuration**.

The **Export / Import Configuration** page is displayed (see Figure 3-14).

Step 2 Under **Export Configuration**:

- Enter the **password**.
- Click **Export**.

Step 3 A message will appear: **"Export Configuration File — Downloading, Please Wait!"**

The configuration file will be downloaded to your local system.

Figure 3-14 Export / Import Configuration page

The screenshot displays the 'Import/Export Configuration' page within the camera's web interface. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar lists 'Quick Start', 'System' (with a sub-menu), and 'Maintenance' (highlighted). Under 'System', there are 'Settings', 'Change Password', 'User', and 'Device Log'. Under 'Maintenance', there are 'Security', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area has tabs for 'Reboot', 'Upgrade', 'Restore', and 'Import/Export Configuration'. The 'Import Configuration' section includes a 'Please Input Password' field, a 'Select File' button (showing 'No file Chosen'), and an 'Upload' button. The 'Export Configuration' section includes a 'CA Cert' button with an 'Export' button, and an 'Export Configuration' section with a 'Please Input Password' field and an 'Export' button.

Export Configuration File

Downloading, Please Wait!

Import Configuration

Step 1 Under **Import Configuration**:

- Enter the **password**.

- Click **Select File**, then browse and select the **config.bin** file from your local drive.
- Click **Upload** to begin the import process.

3.9 Configure Security

3.9.1 IP Filter

Description

The **IP Filter** function allows you to control access to the device based on IP address ranges. You can specify whether to allow or deny access to certain IP segments using whitelist or blacklist rules.

Procedure

Step 1 Go to **Setting > System > Security > IP Filter**.

The **IP Filter** page is displayed (see Figure 3-15).

Step 2 Click the toggle switch to enable **IP Filter**.

Step 3 Configure the parameters listed in **Table 3-4**.

Figure 3-15 IP filter page


The screenshot shows the 'IP Filter' configuration page. On the left is a sidebar with a 'Security' section containing 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area has three tabs: 'IP Filter' (selected), 'HTTPS Certificate', and 'Security Services'. Under the 'IP Filter' tab, there is a toggle switch for 'IP Filter' which is currently turned on. Below it is a 'Rule Type' dropdown menu set to 'Black List'. A section titled 'Black List (Following Network Segments are Forbidden)' contains a table with columns: 'Begin IP Address', 'End IP Address', 'Description', and 'Edit'. The table is currently empty. At the bottom of the page is an 'Apply' button.

Table 3-4 Parameters of IP filter

Parameter	Description	Setting
IP Filter	Enables or disables the IP Filter function.	[Setting method] Click the button on. [Default value] OFF

Parameter	Description	Setting
Rule Type	IP filter type, including black list and white list.	[Setting method] Select a value from the drop-down list box. [Default value] Black List
Black List	Specified network segment should be banned.	[Setting method] 1. Click  to enter the add black/white list page, as shown in Figure 3-16 2. Enter Begin IP Address. 3. Enter End IP Address. 4. Enter Description. 5. Click OK, the black list added successfully.
White List	Allow specified network segment to access.	[Setting method] 1. Click  to enter the add black/white list page, as shown in Figure 3-16. 2. Enter Begin IP Address. 3. Enter End IP Address. 4. Enter Description. 5. Click OK, add the white list successfully.

Figure 3-16 Add IP filter page

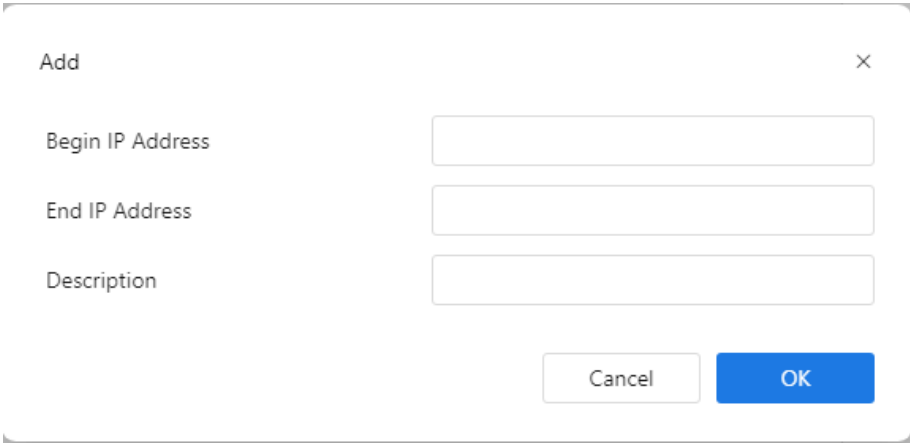

 NOTE

Click  to modify the parameters of setting black list or white.

Click  to delete the setting black list or white.

Step 4 Click Apply.

The If the message "Apply success!" appears, the IP Filter has been successfully configured.

3.9.2 HTTPS Certificate

Description

This section allows you to generate and install an HTTPS certificate for encrypted communication between the camera and your browser. You can create a certificate request, upload a third-party certificate, or manage existing certificates.

Procedure

Step 1 Navigate to **Setting > System > Security > HTTPS Certificate**.

The **HTTPS Certificate** page is displayed, as shown in Figure 3-17

Figure 3-17 HTTPS Certificate

The screenshot shows the 'HTTPS Certificate' page in the camera's web interface. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar has a 'System' menu with 'Settings', 'Change Password', 'User', 'Device Log', and 'Maintenance'. Below it is a 'Security' section with 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area has tabs for 'IP Filter', 'HTTPS Certificate' (selected), and 'Security Services'. Under the 'HTTPS Certificate' tab, there are two sections: 'Certificate Request' and 'Upload File'. The 'Certificate Request' section contains input fields for 'Country', 'State or Province', 'Location', 'Organization', 'Organization Unit', and 'Common Name' (pre-filled with '192.168.0.120'), along with a 'Create' button. The 'Upload File' section contains input fields for 'Server Cert' and 'Server Key', each with a 'Select File' button and a 'No file Chosen' status, and 'Delete' and 'Upload' buttons at the bottom.

Step 2 **Create the certificate request.**


1. Fill in the certificate request details:

- **Country**
- **State or Province**
- **Location**
- **Organization**
- **Organization Unit**
- **Common Name** (e.g., the device's IP address or domain name)

2. Click **Create** to generate the certificate request file.

3. Send the generated file to a third-party Certificate Authority (CA) to obtain the signed certificate.

- After receiving the certificate from the CA, click **Select File** under the appropriate field and upload it.
- Once successfully uploaded, the certificate will be visible and active on the HTTPS web interface.

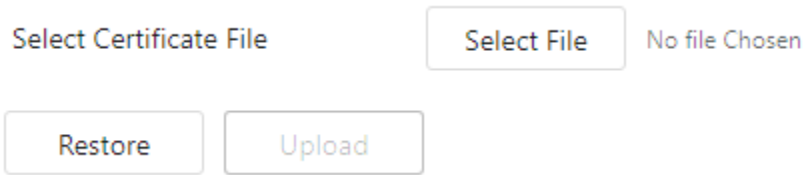

Step 3 To import the certificate from third party:

1. Under the **Upload File** section:
 - In the **Server Cert** field, click **Select File** and choose the certificate file issued by the CA.
 - In the **Server Key** field, click **Select File** and upload the corresponding private key file.
2. Click **Upload** to apply the certificate.
3. **Reboot the camera** for the HTTPS certificate to take effect.

Step 4 Delete an Existing Certificate

- To remove a previously uploaded certificate, click **Delete**.

3.9.3 Security Services

Description

To enhance device security, you can enable the **Illegal Login Lock** feature. When enabled, the system will lock the user account for a specified duration after a defined number of incorrect password attempts.

Procedure

- Step 1 Navigate to **Setting > System > Security > Security Services**.
The **Security Services** page is displayed, as shown in Figure 3-18.

Figure 3-18 Security services page

The screenshot shows the 'IP Camera' system settings interface. The top navigation bar includes 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar has a 'Quick Start' section and a 'System' section with a dropdown arrow. Below 'System' are links for 'Settings', 'Change Password', 'User', 'Device Log', and 'Maintenance'. The 'Security' section is expanded, showing 'Network', 'Video/Audio', 'Image', 'PTZ', 'Event', and 'Storage'. The main content area is titled 'Security Services' and contains three settings: 'Illegal Login Lock' (a toggle switch turned ON), 'Error Attempts' (a text input field with '5' and a range of '(1~30)'), and 'Lock Time' (a text input field with '15' and a range of '(1~30)Min'). An 'Apply' button is located at the bottom of the settings area.

Step 2 Configure the following settings:

- **Illegal Login Lock:** Toggle this switch **ON** to enable account lockout for failed login attempts.
- **Error Attempts:** Enter the number of allowed incorrect password attempts before lockout is triggered.
 - **Range:** 1–30
 - **Example:** Setting this to 5 means the account will be locked after 5 failed login attempts.
- **Lock Time:** Enter the duration (in minutes) for which the account will remain locked after exceeding the allowed attempts.
 - **Range:** 1–30 minutes
 - **Example:** Setting this to 15 means the account will be locked for 15 minutes.

Step 3 Click **Apply**.

- A message "**Apply success!**" confirms that the settings have been saved.

4 Configure the Network Service

4.4 Basic Settings

4.4.1 Local Network

For detailed information on Local Network Settings, please refer to **Chapter 2.5**

4.4.2 Device Port

Description

To enable proper network routing within a LAN, you must configure the following ports:

- **HTTP Port**
- **Control Port**
- **RTSP (Real-Time Streaming Protocol) Port**
- **HTTPS (SSL) Port**

These ports are essential for web access, video streaming, and secure communication.

Procedure

Step 1 Navigate to **Setting > Network > Settings > Device Port**.

The **Device Port** page is displayed (see Figure 4-1).

Step 2 Set the parameters, as shown in Table 4-1.

Figure 4-1 Device port page

The screenshot shows the 'Device Port' configuration page. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar has 'Quick Start', 'System', 'Network', 'Settings', 'Advanced Settings', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area has tabs for 'Local Network', 'Device Port', 'Port Mapping', 'DDNS', and 'PPPoE'. Under the 'Device Port' tab, there are four rows of settings: 'Control Port' (30001, range 1025~65535), 'HTTP Port' (80, range 1~65535), 'RTSP Port' (554, range 1~65535), and 'HTTPS Port' (443, range 1~65535). An 'Apply' button is at the bottom.

Parameter	Value	Range
Control Port	30001	1025~65535
HTTP Port	80	1~65535
RTSP Port	554	1~65535
HTTPS Port	443	1~65535

Table 4-1 Parameters of device port

Parameter	Description	Setting
Control Port	Used for audio, video transmission, and signaling interaction.	[Setting method] Enter a value manually. [Default value] 30001
HTTP Port	Port used for standard web access. If changed (e.g., to 86), access the device using: http://192.168.0.120:86/	[Setting method] Enter a value manually. [Default value] 80
RTSP Port	Port for RTSP protocol (streaming). Example: Input rtsp://192.168.0.120:554/sn1/live/1/1 into VLC to view live video. Refer to Configuration > Protocol > Protocol Info for further details.	[Setting method] Enter a value manually. [Default value] 554
HTTPS Port	secure port for web access using SSL. Before use, ensure Web Mode is set to HTTPS under Configuration > Device > System . Access format: https://192.168.0.120:443	[Setting method] Enter a value manually. [Default value] 443
SSL Control Port	Secure socket layer control port. Note: This option is available on select models only.	[Setting method] Enter a value manually. [Default value] 20001

 NOTE

It is generally **not recommended** to change the **Control Port**.

Refer to the **Communication Matrix** for valid port ranges for Control, HTTP, and SSL ports.

Step 3 Click Apply.

- If the message "**Apply success!**" appears, the settings have been saved.

- If you see **"Port invalid, please check it,"** review and re-enter valid port numbers.

4.4.3 Port Mapping

Description

Port mapping helps establish a mapping relationship between the private network and the external network. Port mapping allows outside computers to access intranet devices so that the network works efficiently.

Procedure

Step 1 Choose **Setting > Network > Settings > Port Mapping**.

The **Port Mapping** page is displayed, as shown in Figure 4-2.

Figure 4-2 Port mapping page

Status	Port Type	External Port	External IP Address	Status
☒	HTTP	80	0.0.0.0	Inactive
☒	RTSP	554	0.0.0.0	Inactive
☒	CONTROL	30001	0.0.0.0	Inactive
☒	HTTPS	443	0.0.0.0	Inactive

Step 2 Click the button on to enable **Port Mapping**.

Step 3 Set the parameters according to Table 4-2.

Table 4-2 Parameters of port mapping

Parameter	Description	Setting
Port Mapping	Enables or disables the port mapping service.	[Setting method] Click the button on. [Default value] OFF
Map Mode	Defines how Auto and Manual ports are mapped	[[Setting method] Select a value from

Parameter	Description	Setting
		the drop-down list box. [Default value] Auto
Port Type	Types of ports used in the mapping: Includes SSL Control , HTTP , RTSP , Control , and HTTPS .	N/A
External Port	The port number used on the external (public) network.	[Setting method] Enter a value manually in map mode.
External IP Address	IP address used on the external network to access the device.	N/A
State	Displays the current mapping status for each port.	N/A

Step 4 Click **Apply**.

- If the message "**Apply success!**" appears, the settings have been saved.
- If any other message appears, review and correct the parameters.

4.4.4 DDNS

Preparation

Before configuring DDNS, ensure that:

- The camera is connected to the Internet.
- You have obtained a valid **username** and **password** for logging into the Dynamic Domain Name System (DDNS) server.

Procedure

Step 1 Navigate to **Setting > Network > Settings > DDNS**.

The **DDNS** page is displayed, as shown in Figure 4-3.

Figure 4-3 DDNS page

The screenshot displays the DDNS configuration interface. On the left, a sidebar contains 'Quick Start', 'System', 'Network', 'Settings', 'Advanced Settings', 'Video/Audio', 'Image', 'Event', and 'Storage'. The 'Settings' section is expanded. The main area has tabs for 'Local Network', 'Device Port', 'Port Mapping', 'DDNS', and 'PPPoE'. The 'DDNS' tab is selected, showing a toggle switch for 'DDNS' (currently on). Below the toggle are fields for 'Provider' (set to '3322_ddns'), 'Network Card Name' (set to 'eth0'), 'Host Name', 'Account', and 'Password'. A 'Test DDNS' button is located below the password field. At the bottom, there is an 'Apply' button.

Step 2 Click the toggle switch to enable **DDNS**.

Step 3 Configure the parameters as shown in Table 4-3.

Table 4-3 Parameters of DDNS

Parameter	Description	Setting
DDNS	Enables or disables the DDNS service.	[Setting method] Click the button on to enable DDNS. [Default value] OFF
Provider	elect your DDNS service provider. Currently supported providers: 3322_DDNS - Dyndns	[Setting method] Select a value from the drop-down list box. [Default value] 3322 NOTE Set this parameter based on the site requirements.
Network Card Name	Specifies which network card to use for DDNS.	[Setting method] Select a value from the drop-down list box. [Default value] Eth0

Parameter	Description	Setting
Host Name	Custom domain name set by the user.	[Setting method] Enter a value manually. [Default value] Blank
Accounts	Username for logging into the DDNS service.	[Setting method] Enter a value manually. [Default value] Blank
Password	Password for logging into the DDNS service. Note: Set all parameters according to your DDNS service provider's instructions and site requirements.	[Setting method] Enter a value manually. [Default value] Blank

Step 4 Click **Apply**.

- ☐ If the message "Apply success!" appears, the configuration has been saved.
- ☐ If an error appears, review the settings and correct any incorrect values.

4.4.5

4.4.6 Set PPPoE

Preparation

Before configuring PPPoE, obtain your **username** and **password** from your Internet service provider (ISP).

Description

If the camera connects to the Internet via **PPPoE (Point-to-Point Protocol over Ethernet)**, you must enter the provided credentials on the PPPoE configuration page. Once the device restarts, the PPPoE settings take effect, and the system will obtain a **public IP address**.

Procedure

Step 1 Navigate to **Setting > Network > Settings > PPPoE**.

The **PPPoE** page is displayed, as shown in Figure 4-4.

Figure 4-4 PPPoE page

The screenshot displays the 'PPPoE' configuration page in the D-Link F-Series Camera web interface. The interface features a blue header with the title 'IP Camera' and navigation icons for 'Live View', 'Playback', 'IVS', and 'Setting'. A left sidebar contains a menu with 'Quick Start', 'System', 'Network', 'Settings', 'Advanced Settings', 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area has tabs for 'Local Network', 'Device Port', 'Port Mapping', 'DDNS', and 'PPPoE'. The 'PPPoE' tab is selected, showing a toggle switch for 'PPPoE' (turned on), input fields for 'Account' and 'Password', and a label 'IP Address' with the value 'Empty'. An 'Apply' button is located at the bottom of the configuration area.

Step 2 Click the toggle button to **enable PPPoE**.

Step 3 Set the parameters according to Table 4-4.

Table 4-4 Parameters of PPPoE

Parameter	Description	Setting
PPPoE	Click to enable PPPoE dialing.	[Setting method] Click the button on. [Default value] OFF
Accounts	User name of PPPoE provided by the network carrier.	[Setting method] Enter a value manually.
Password	Password of PPPoE provided by the network carrier.	[Setting method] Enter a value manually.

Step 4 Click **Apply**.

- If the message "**Apply success!**" appears, the settings have been saved.
- If another message appears, review and correct the entered credentials.

Note: The IP address assigned via PPPoE will be displayed after a successful connection.

4.5 Advanced Settings

4.5.1 Set FTP

Description


When **FTP (File Transfer Protocol) Upload** is enabled, the device will automatically send captured alarm snapshots (JPG images) to a designated FTP server.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > FTP**.

The **FTP** configuration page is displayed as shown in Figure 4-5.

Figure 4-5 FTP page

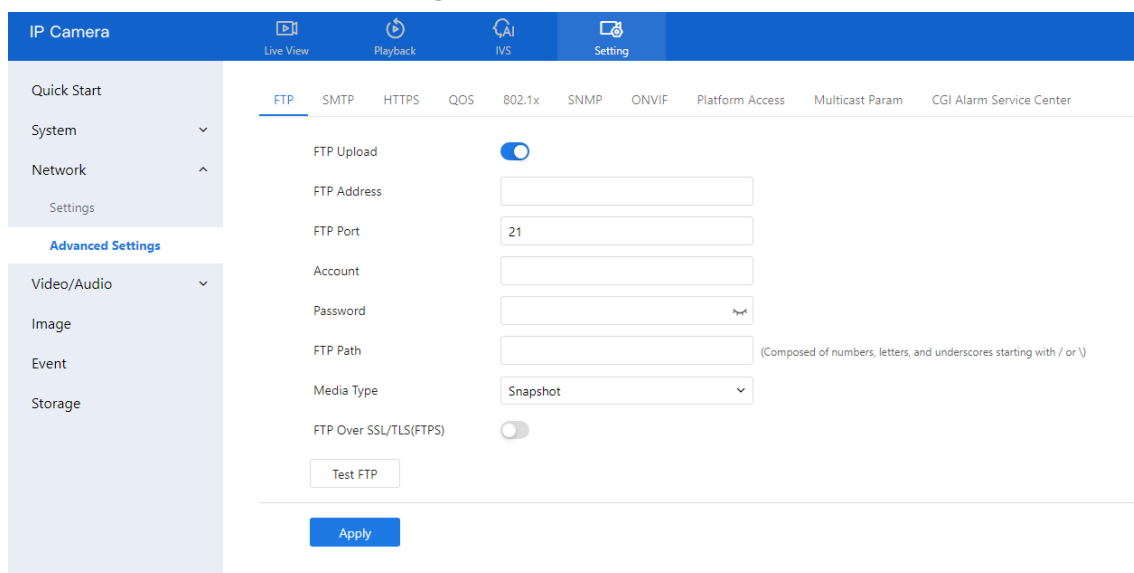

Step 2 Click the toggle button to **enable FTP Upload**.

Step 3 Set the parameters as shown in Table 4-5.

Table 4-5 Parameters of FTP

Parameter	Description	Setting
FTP Upload	Enables or disables FTP upload functionality.	[Setting method] Click the button on. [Default value] OFF
FTP Address	IP address of the FTP server.	[Setting method] Enter a value manually.
FTP Port	Port number of the FTP server.	[Setting method] N/A [Default value] 21

Parameter	Description	Setting
Account	Username for FTP server login.	[Setting method] Enter a value manually.
Password	Password for FTP server login.	[Setting method] Enter a value manually.
FTP Path	FTP Path on the FTP server to store images.	[Setting method] Enter a value manually.
Media Type	Specifies the type of media to upload: Snapshot (JPG image) Video Clip (only if supported)	[Setting method] Select a value from the drop-down list box. [Default value] Snapshot
FTP over SSL/TLS (FTPS)	Enables encryption during file transfer using SSL/TLS.	[Setting method] Tick

Step 4 Click **Test FTP** to verify the connection.

If "**Test succeed**" appears, the configuration is correct.

If "**Test failed**" appears, review and correct the FTP settings.

Step 5 Click **Apply**.

- If the message "**Apply success!**" appears, the configuration has been saved successfully.
- If an error message appears, revise the input accordingly.

4.5.2 Set SMTP

Description

If the Simple Mail Transfer Protocol (SMTP) function is enabled, the device will automatically send JPG images and alarm information to specified email addresses when an alarm is generated.

Procedure

Step 1 Choose **Setting > Network > Advanced Settings > SMTP**.

The **SMTP** page is displayed, as shown in Figure 4-6.

Figure 4-6 SMTP page

Step 2 Set the parameters according to Table 4-6.

NOTE

Fields marked with an asterisk (*) are mandatory.

Table 4-6 Parameters of SMTP

Parameter	Description	Setting
SMTP Server Address	IP address of the SMTP server.	[Setting method] Enter a value manually.
SMTP Server Port	Port number of the SMTP server.	[Setting method] Enter a value manually. [Default value] 25
User Name	Username of the sender's email account.	[Setting method] Enter a value manually.
Password	Password for the sender's email account.	[Setting method] Enter a value manually.
Sender E-mail Address	Email address used to send alerts.	[Setting method] Enter a value manually.

Parameter	Description	Setting
Recipient_Email_Addresses 1	Primary recipient email address.	[Setting method] Enter a value manually.
Recipient_Email_Addresses 2	Optional second recipient.	
Recipient_Email_Addresses 3	Optional third recipient.	
Recipient_Email_Addresses 4	Optional fourth recipient.	
Recipient_Email_Addresses 5	Optional fifth recipient.	
Attachment Image Quality	Higher quality uses more storage. Set based on requirements.	N/A
Transport Mode	Email encryption mode. Set this parameter based on the encryption modes supported by the SMTP server.	[Setting method] Select a value from the drop-down list box. [Default value] No Encrypted

Step 3 Click **Apply**.

- If the message "**Apply success!**" appears, the settings have been saved successfully.
- If another message appears, review and correct any parameter errors.


4.5.3 Set HTTPS

Preparation

If users wish to access the camera's web interface securely via **HTTPS**, they must first configure the HTTPS port. For example, to access the web interface, input:

<https://192.168.0.120:443>

Figure 4-7 HTTPS page

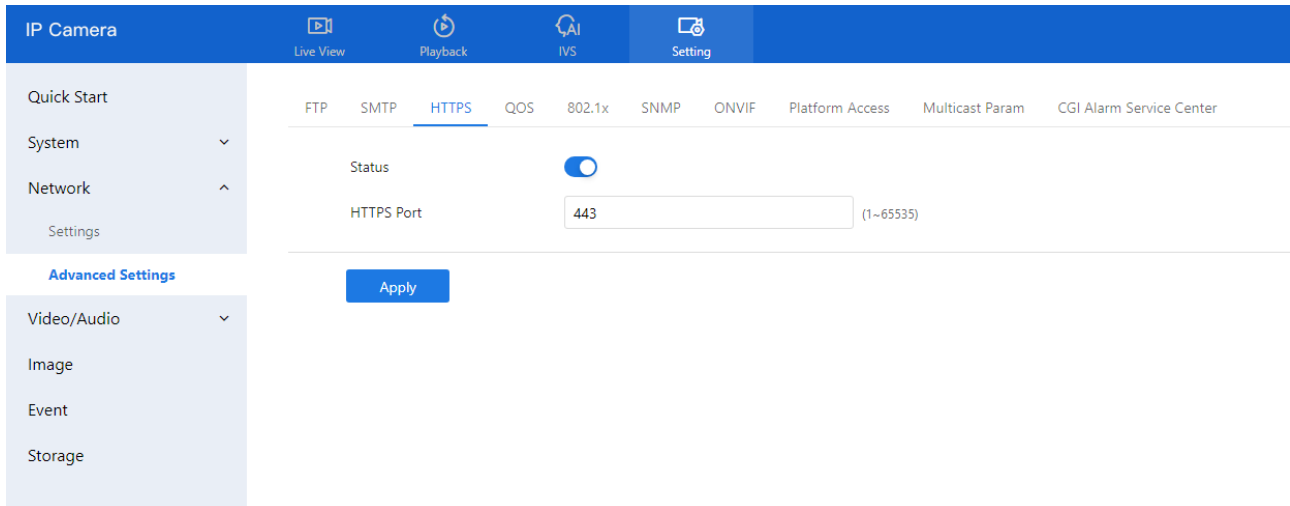

4.5.4 Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > HTTPS**.

The **HTTPS** configuration page is displayed (see Figure 4-7).

Step 2 Toggle the **Status** switch to **enable HTTPS**.

Step 3 In the **HTTPS Port** field, enter the desired port number.

- **Valid Range:** 1–65535
- **Default:** 443

Step 4 Click **Apply**.

- If the message "**Apply success!**" appears, the HTTPS configuration has been saved.
- You can now access the device securely using the designated port.

4.5.5 Set QoS

Description

If the device is connected to a **router or switch** that supports **QoS (Quality of Service)**, and the network equipment is configured with appropriate priority rules, data packets from the device will be prioritized accordingly.

This setting helps ensure better performance and bandwidth management for critical services such as video streaming, alarms, and control commands.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > QoS**.

The **QoS** page is displayed, as shown in Figure 4-8.

Figure 4-8 QOS page

The screenshot displays the QOS configuration page in the D-Link F-Series Camera web interface. The sidebar on the left includes 'Quick Start', 'System', 'Network', and 'Settings' under the 'Advanced Settings' section. The main content area features a horizontal tab bar with options: FTP, SMTP, HTTPS, QOS (active), 802.1x, SNMP, ONVIF, Platform Access, Multicast Param, and CGI Alarm Service Center. The QOS configuration section contains three input fields: 'Audio/Video Dscp' (value 0), 'Alarm Dscp' (value 0), and 'Command Dscp' (value 0). Each field has a range indicator '(0~63)' to its right. An 'Apply' button is located at the bottom left of the QOS configuration area.

Step 2 Enter values for the following fields. Valid input range for each is **0–63**:

- **Audio/Video DSCP**: Priority level for audio/video data
- **Alarm DSCP**: Priority level for alarm signals
- **Command DSCP**: Priority level for control commands

Step 3 Click **Apply**.

- ☐ If the message "**Apply success!**" appears, the settings have been successfully applied.
- ☐ If any error occurs, verify the DSCP values entered and correct them.

4.5.6 Set 802.1x

Preparation

Ensure that **802.1x authentication** is configured on the device's network port. This standard verifies user identity and helps control access to network resources.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > 802.1x**.

The **802.1x** configuration page is displayed, as shown in Figure 4-9.

Figure 4-9 802.1x page

The screenshot shows the '802.1x' configuration page. The top navigation bar includes 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar has 'Quick Start', 'System', 'Network', and 'Settings'. The main content area has tabs for 'FTP', 'SMTP', 'HTTPS', 'QOS', '802.1x', 'SNMP', 'ONVIF', 'Platform Access', 'Multicast Param', and 'CGI Alarm Service Center'. The '802.1x' tab is active, showing a toggle switch for '802.1x' which is turned on. Below it are fields for 'EAP Method' (set to 'EAP-MD5'), 'Account', 'Password', and 'Confirm Password'. An 'Apply' button is at the bottom.

Step 2 Toggle the **802.1x** switch to **enable** authentication.

Step 3 Choose the **EAP Method (Extensible Authentication Protocol)** from the drop-down list:

- **EAP-MD5**
- **EAP-TLS**

Step 4 Enter the **Account Name**.

Step 5 Enter and confirm the **Password**.

Step 6 Click **Apply**.

If the message "Apply success!" is displayed, the settings have been saved successfully.

4.5.7 Set SNMP

Description

Simple Network Management Protocol (SNMP) is an internet-standard protocol used for managing devices on IP networks. This system supports:

- **SNMPv1**
- **SNMPv2c**
- **SNMPv3**

Each version has unique security models and configuration parameters.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > SNMP**.

The **SNMP** page is displayed, as shown in Figure 4-10.

Figure 4-10 SNMP page

The screenshot displays the SNMP configuration page in the D-Link F-Series Camera web interface. The interface features a blue header with the title 'IP Camera' and navigation tabs for 'Live View', 'Playback', 'IVS', and 'Setting' (the active tab). A left sidebar lists navigation options: 'Quick Start', 'System', 'Network', and 'Settings' (expanded), with 'Advanced Settings' below. The main content area has tabs for various network services: 'FTP', 'SMTP', 'HTTPS', 'QOS', '802.1x', 'SNMP' (selected), 'ONVIF', 'Platform Access', 'Multicast Param', and 'CGI Alarm Service Center'. Under the 'SNMP' tab, there are three sections: 'SNMPv1', 'SNMPv2c', and 'SNMPv3'. 'SNMPv1' and 'SNMPv2c' are enabled, indicated by blue toggle switches. Below these, there are input fields for 'Write Community', 'Read Community', 'Trap Address', 'Trap Port' (set to 162), and 'Trap Community'. The 'SNMPv3' section has a disabled toggle switch. Below the 'SNMPv3' section is an 'SNMP Port' input field set to 161. An 'Apply' button is located at the bottom of the configuration area.

Step 2 Toggle the appropriate buttons to enable **SNMPv1**, **SNMPv2c**, or **SNMPv3**.
Step 3 Configure parameters as shown in Table 4-7.

Table 4-7 Parameters of SNMP

Parameter	Description	Setting
SNMPv1	Version of SNMP.	[Setting method] Click the button on. [Default value] OFF
SNMPv2c	SNMPv1 and SNMPv2c use communities to establish trust between managers and agents. Agents support three community names, write community, read community and trap.	
Write Community	Name of write community. The write community only can modify data.	[Setting method] Enter a value manually.
Read Community	Name of read community. The write community only can read data.	
Trap Address	IP address of the trap.	
Trap Port	Management port of accepting message from trap.	
Trap Community	Community string of trap. The trap community string allows the manager to receive asynchronous information from the agent.	
SNMPv3	Version of SNMP. SNMPv3 uses community strings, but allows for secure authentication and communication between SNMP manager and agent.	[Setting method] Click the button on. [Default value] OFF
Read Security Name	Name of read security.	[Setting method] Enter a value manually.
Write Security Name	Name of write security.	
Security Level	Security Level between SNMP manager and agent, includes three levels: No auth: No authentication and no encryption Auth: Authentication but no encryption Priv: Authentication and encryption	[Setting method] Select a value from the drop-down list box. [Default value] Blank

Parameter	Description	Setting
Auth Algorithm	Authentication Algorithm, includes MD5 and SHA.	[Setting method] Select a value from the drop-down list box. [Default value] Blank
Auth Password	Authentication password.	[Setting method] Enter a value manually.
Encrypt Algorithm	Encryption Algorithm, includes DES and AES.	[Setting method] Select a value from the drop-down list box. [Default value] Blank
Encrypt Password	Encryption password.	[Setting method] Enter a value manually.
SNMP Port	Port of SNMP.	[Setting method] Enter a value manually. [Default value] 161

Step 4 Click **Apply**.

- If the message "**Apply success!**" is displayed, your SNMP settings are saved.
- If another message appears, verify and correct the configuration.

4.5.8 View ONVIF

Description

The **ONVIF** page displays details about the protocol configuration used for external integration with ONVIF-compliant systems.

Procedure:

Step 1 Navigate to **Setting > Network > Advanced Settings > ONVIF**.

The **ONVIF** page is displayed, as shown in Figure 4-11. Table 4-8 describes the protocol-related parameters

Figure 4-11 ONVIF page

The screenshot displays the ONVIF configuration page. The left sidebar contains navigation options: Quick Start, System, Network, Settings, and Advanced Settings. The main content area shows the following parameters and their values:

Parameter	Value
Protocol Name	ONVIF
Protocol Version	v22.06
Protocol Software Version	v22.06_build000528
RTSP Format	rtsp://ip:port/ssl/live/cameraid/streamid
RTSP Example	rtsp://192.168.0.120:554/ssl/live/1/1
Onvif UUID	094b5d40-e227-11ee-9e2f-001c27154578
User Verification	☒
Onvif	☒
Profile G	☐
Media2	☐
Metadata Stream	☒
Image Event	☐
Intelligent Analysis Switch	☐
Onvif Only Https	☐
Stream Only Https	☐

An "Apply" button is located at the bottom of the configuration area.

Table 4-8 Parameters of protocol-related

Parameter	Description
Protocol Name	Type of the access protocol.
Protocol Version	Version number of the access protocol.
Protocol Software Version	Software version number of the access protocol.
RTSP Format	URL rule of Real Time Streaming Protocol.
RTSP Example	URL example of Real Time Streaming Protocol.
Onvif UUID	Universally Unique Identifier.

Parameter	Description
User Verification	When you select the User Verification check box, the user name and password must be the same as those for logging in to the device web page. NOTE When an ONVIF-compliant device connects to the platform, you must authenticate the user name and password to ensure the connection security.
Onvif	Enable Onvif
Profile G	Enable Onvif profile G
Intelligent Analysis Switch	Enable intelligent analysis switch
Media 2	Enable media 2
Image Event	Enable image event
Intelligent Analysis Switch	Enable active onvif
Onvif only Https	Onvif can use a more secure HTTPS mode for connection, command interaction and video data transmission, which are transmitted in an encrypted way to enhance network security.
Stream only https	

Step 2 Click **Apply**.

A confirmation dialog appears. Click **Confirm** to restart the device and apply changes.

4.5.9 Set Platform Access

Description

Use **Platform Access** to connect the IP camera to a centralized management platform outside the local network. This is useful when the device and the platform are on different networks.

You must prepare and configure a **platform server** in advance.

Ensure that **port forwarding** or **NAT mapping** is set on the external network.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > Platform Access**.
The **Platform Access** page is displayed, as shown in Figure 4-12

Figure 4-12 Platform access page

IP Camera

Live View Playback IVS Setting

Quick Start

System

Network

Settings

Advanced Settings

Video/Audio

Image

Event

Storage

FTP SMTP HTTPS QOS 802.1x SNMP ONVIF Platform Access Multicast Param CGI Alarm Service Center

Platform Access

Host Name

Port 0 (1~65535)

User Name

Password

Encrypt

Apply

Step 2 Input the following connection parameters:

- **Host Name:** Enter the IP address or domain name of the external platform server.
- **Port:** Port used by the platform.
- **User Name and Password:** Credentials that match the platform login.

Basic Information

Refresh Back Restore Edit Delete

Server Name: CMU_127.0.0.1 Type: CMU IP/Port: 127.0.0.1: 10086 Start-up Time: 2022-04-11 15:15:51

Running State: Online Version: V1.7.1.0.1.0.0_20220331 Remote IP/Port: Device registration port: 17888 Online Time: 4Hrs 15Min 56Sec

Log Type: Error P2P status: Offline P2P UUID: Remote device registration port: SSL port: 15680

Domain: Default Domain

Step 3 When adding the IP camera to the platform, use the following information:

- **IP / ID / Domain Name:** Device ID of the IP camera.
- **Connection Mode:** Choose **Device Active Registration**.

+ AddDevice

Device Name

Device Type IPC

Protocol Private Protocol

IP/ID/ domain name

Port 30001

Group Default group

Advanced setting

Connection mode Device active registration

IAU Not Support

MDU Auto

Save and New Test Add Cancel

 Device Info

Device ID	158888
Device Name	
MAC Address	00:1C:27:15:88:88

Step 4 Enable **Encrypt** to secure the connection between the camera and the platform.

Step 5 Click **Apply**.

If the message "**Apply success!**" appears, the settings are saved and applied.

4.5.10 Set Multicast Parameters

Description

This section allows you to configure multicast streaming settings, including stream ID, video/audio ports, and source addresses for efficient data distribution across multicast-capable networks.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > Multicast Param.**

The **Multicast Param** page is displayed as shown in Figure 4-13. Table 4-9 describes the parameters on the **Multicast Param** page.

Figure 4-13 Multicast param page

The screenshot shows the 'Multicast Param' page in the IP Camera web interface. The page has a blue header with 'IP Camera' and navigation tabs: 'Live View', 'Playback', 'IVS', and 'Setting'. The 'Setting' tab is active. On the left, there is a sidebar with 'Quick Start', 'System', 'Network', and 'Settings'. Under 'Advanced Settings', there are options for 'Video/Audio', 'Image', 'Event', and 'Storage'. The main content area shows the 'Multicast Param' settings. It includes a 'Stream ID' dropdown menu set to '1', and input fields for 'Video Port' (25330), 'Video Address' (238.255.255.255), 'Audio Port' (25430), 'Audio Address' (238.255.255.255), 'Source Port' (25530), and 'Source Address' (238.255.255.255). Each port field has a range '(1025~65535)' next to it. An 'Apply' button is located at the bottom of the settings area.

Table 4-9 Parameter description

Parameter	Description	Setting
Stream ID	ID for the stream.	[Setting method] Select a value from the drop-list box. [Default value] 1
Video address	IP address to receive video multicast data.	[Setting method] Enter a value manually. [Default value] 238.255.255.255
Video Port	Port for receiving video stream.	[Setting method] Enter a value manually. [Default value] 25330

Parameter	Description	Setting
Audio Port	Port for receiving audio stream.	[Setting method] Enter a value manually. [Default value] 25430
Source Port	Port for receiving source data.	[Setting method] Enter a value manually. [Default value] 25530

Step 2 Click **Apply**.

A confirmation message will appear. Settings take effect after the device restarts.

4.5.11 Set CGI Alarm Service Center

Description

When enabled, the device can send alarm messages using **CGI (Common Gateway Interface)** through specified **Start URL** and **End URL** using the **HTTP** protocol. Alarm data is embedded in the **User-Agent** field of HTTP headers and forwarded to a configured CGI server.

Procedure

Step 1 Navigate to **Setting > Network > Advanced Settings > CGI Alarm Service Center**.
The page is displayed, as shown in Figure 4-14.

Figure 4-14 CGI alarm service center page

The screenshot displays the 'CGI Alarm Service Center' configuration page in the D-Link F-Series Camera web interface. The interface features a blue header with navigation options: 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. A left sidebar contains a menu with 'Quick Start', 'System', 'Network', 'Settings', and 'Advanced Settings'. The main configuration area is titled 'CGI Alarm Service Center' and includes the following elements:

- Navigation Tabs:** FTP, SMTP, HTTPS, QOS, 802.1x, SNMP, ONVIF, Platform Access, Multicast Param, and CGI Alarm Service Center (selected).
- CGI Alarm Toggle:** A blue toggle switch is currently turned off.
- Alarm Type:** A dropdown menu set to 'All'.
- Name:** A text input field.
- Type:** A dropdown menu set to 'HTTP'.
- URL Start:** A text input field.
- URL End:** A text input field.
- Proxy Setting:** A blue toggle switch is currently turned on.
- Address:** A text input field.
- Port:** A text input field.
- Platform User Name:** A text input field.
- Platform Password:** A text input field with a password icon.
- Test Button:** A button labeled 'Test' to verify the connection to the specified HTTP server.
- Apply Button:** A blue button labeled 'Apply' at the bottom of the form.

Step 2 Click the toggle to **enable CGI Alarm**.

Step 3 Set the parameters according to Table 4-10.

Table 4-10 Parameters of CGI Alarm service center

Parameter	Description	Setting
CGI Alarm	Enable or disable CGI alarm functionality.	[Setting method] Click the button on. [Default value] OFF
Alarm Type	Enable or disable CGI alarm functionality.	[Setting method] Select a value from the drop-down list box. [Default value] All
Name	Custom name for the CGI alarm.	[Setting method] Enter a value manually.
Type	Protocol type for pushing the alarm (e.g., HTTP).	[Setting method] Select a value from the drop-down list box. [Default value] HTTP

Parameter	Description	Setting
URL Start	URL to which the alarm is pushed at start.	[Setting method] Enter a value manually. For example: http://192.168.35.74:80/MajorAlarmType&MinorAlarmType&SourceName&DeviceID&DeviceIP&AlarmTime&Description
URL End	URL to which the alarm is pushed at end.	[Setting method] Enter a value manually. For example: http://192.168.35.74:80/MajorAlarmType&MinorAlarmType&SourceName&DeviceID&DeviceIP&AlarmTime&Description
Proxy Setting	Enable proxy for forwarding CGI alarms.	[Setting method] Click the button on. [Default value] OFF
Address	IP address of the proxy server.	[Setting method] Enter a value manually.
Port	Proxy server port.	[Setting method] Enter a value manually.
Platform User Name	Username for proxy platform login.	[Setting method] Enter a value manually.
Platform Password	Password for proxy platform login.	[Setting method] Enter a value manually.
Test the connection to the specified HTTP server	Test if the device connects to the proxy successfully.	[Setting method] Click Test, if the device connects to the proxy successfully, the message "Test CGI alarm success" is displayed.

Step 4 Click **Apply**.

- If "**Apply success!**" appears, the settings are saved.
- If "**Parameter is invalid**" appears, check and correct the configuration.

5 Configuration Video/Audio

5.4 Video

5.4.1 Set video

For detailed instructions on setting video parameters, please refer to **Chapter 2.5**

5.4.2 Snapshot

Procedure

Step 1 Navigate to **Setting > Video/Audio > Snapshot**.

The **Snapshot** configuration page is displayed, as shown in Figure 5-1.

Figure 5-1 Snapshot configuration page

The screenshot displays the 'Snapshot' configuration page within the 'Setting' menu. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar lists 'Quick Start', 'System', 'Network', 'Video/Audio', 'Video', 'Audio', 'Image', 'Event', and 'Storage'. The main content area has tabs for 'Video', 'Snapshot', and 'ROI'. Under the 'Snapshot' tab, there are two settings: 'Resolution' set to '1280x720' and 'Quality' set to 'Mid'. An 'Apply' button is located at the bottom of the settings area.

Step 2 Set the parameters according to Table 5-1.

Table 5-1 Parameters of snapshot configuration

Parameter	Description	Setting
Snapshot Resolution	Choose resolution of snapshot.	[Setting method] Select a value from the drop-down list box. [Default value] 1280*720

Parameter	Description	Setting
Snapshot Quality	Choose the quality of snapshot.	[Setting method] Click the button. [Default value] Mid


5.4.3 ROI Parameter

Procedure

Step 1 Navigate to **Setting > Video/Audio > Snapshot**.

The **Snapshot** configuration page is displayed as shown in Figure 5-2.

Figure 5-2 ROI configuration page

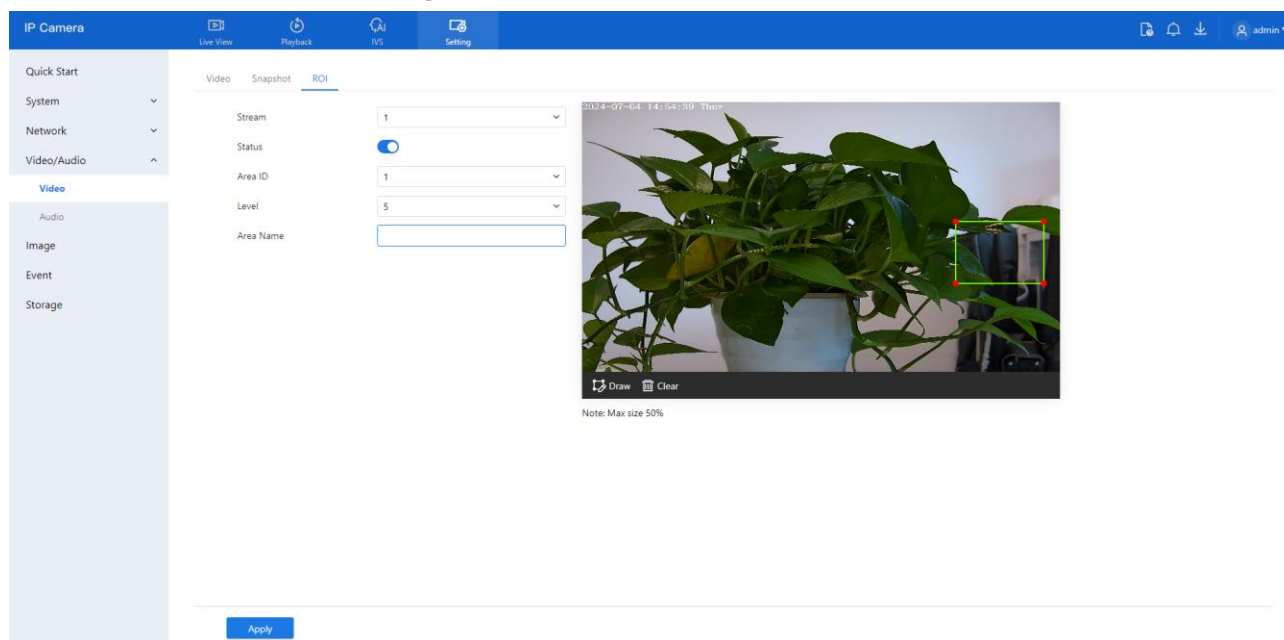

Step 2 Set the parameters according to Table 5-2.

Table 5-2 Parameters of ROI

Parameter	Description	Setting
Channel	For general cameras, the default is channel 1. For bi-spectrum cameras, 1 is optical channel, 2 is thermal channel.	[Setting method] Select a value from the drop-down list box. [Default value] Stream 1

Parameter	Description	Setting
Stream	Stream ID.	[Setting method] Select a value from the drop-down list box. [Default value] Stream 1
Status	Enable or disable the ROI	[Setting method] Click the button. [Default value] OFF
Area ID	ROI area ID	[Setting method] Select a value from the drop-down list box. [Default value] 1
Level	The visual effect of ROI. The higher the level is, the clearer the area is; the more blurred outside the area.	[Setting method] Select a value from the drop-down list box. [Default value] 5
Area Name	The marked name used for areas.	[Setting method] Enter a value manually. The value cannot exceed 32 bytes.

Step 3 Click **Draw** to show the red frame, drag the four corners of rectangle to adjust the position.

Step 4 Click **Apply**.

If the message "**Apply success!**" is displayed, the settings have been saved.

5.5 Audio

5.5.1 Audio

Description

On this page, you can configure **audio input and output** settings, including type, volume, and noise reduction.

Procedure

Step 1 Navigate to **Setting > Video/Audio > Audio**. The **Audio Input** page is displayed, as shown in Figure 5-3. Table 5-3 describes the parameters.

Figure 5-3 Audio input page

The screenshot shows the 'Audio Input' configuration page. On the left is a sidebar with navigation options: Quick Start, System, Network, Video/Audio (selected), and Video. Under 'Video/Audio', there are sub-options: Audio (selected), Image, Event, and Storage. The main content area has two tabs: 'Audio' (selected) and 'Audio File'. The 'Audio' tab contains the following settings:

- Audio Input:** A toggle switch is turned on.
- Audio Input Type:** A dropdown menu is set to 'Line In'.
- Audio Input Volume:** A slider is positioned at 50.
- Audio Output:** A toggle switch is turned on.
- Audio Output Type:** A dropdown menu is set to 'External'.
- Audio Output Volume:** A slider is positioned at 100.
- Voice Denoise:** A toggle switch is turned off.

An 'Apply' button is located at the bottom of the settings area.

Table 5-3 Parameters of audio input

Parameter	Description	Setting
Enable Audio Input	Indicates whether to enable the audio input function.	[Setting method] Click the button on to enable audio input.
Audio Input Type	Audio input types include: Line In / Internal An active audio input is required.	[Setting method] Select a value from the drop-down list box.
Audio Input Volume	Allows you to adjust the audio input volume.	[Setting method] Slide the slider left or right. [Default value] 50 NOTE The value ranges from 0 to 100.
Enable Audio Output	Indicates whether to enable the audio output function.	[Setting method] Click the button on to enable audio output.

Parameter	Description	Setting
Audio Output Type	Microphone types include: ☐ External An active audio output is required. Internal means the camera own speaker.	[Setting method] Select a value from the drop-down list box.
Audio output Volume	Allows you to adjust the audio output volume.	[Setting method] Slide the slider left or right. [Default value] 50 NOTE The value ranges from 0 to 100.
Voice Denoise	Reduces background noise on internal mic.	[Setting method] Click the button on to enable.

Step 2 Click **Apply**.

If "**Apply success!**" is displayed, the settings have been saved.

5.5.2 Audible File (Feature available only on certain models)


Procedure:

Step 1 Navigate to **Setting > Video/Audio > Audio > Audio File**.

The **Audio File** configuration page is displayed, as shown in Figure 5-4.

- Volume for playback can be adjusted at **Setting > Video/Audio > Audio > Audio Output**, as shown in Figure 5-4.

Figure 5-4 Audio file page

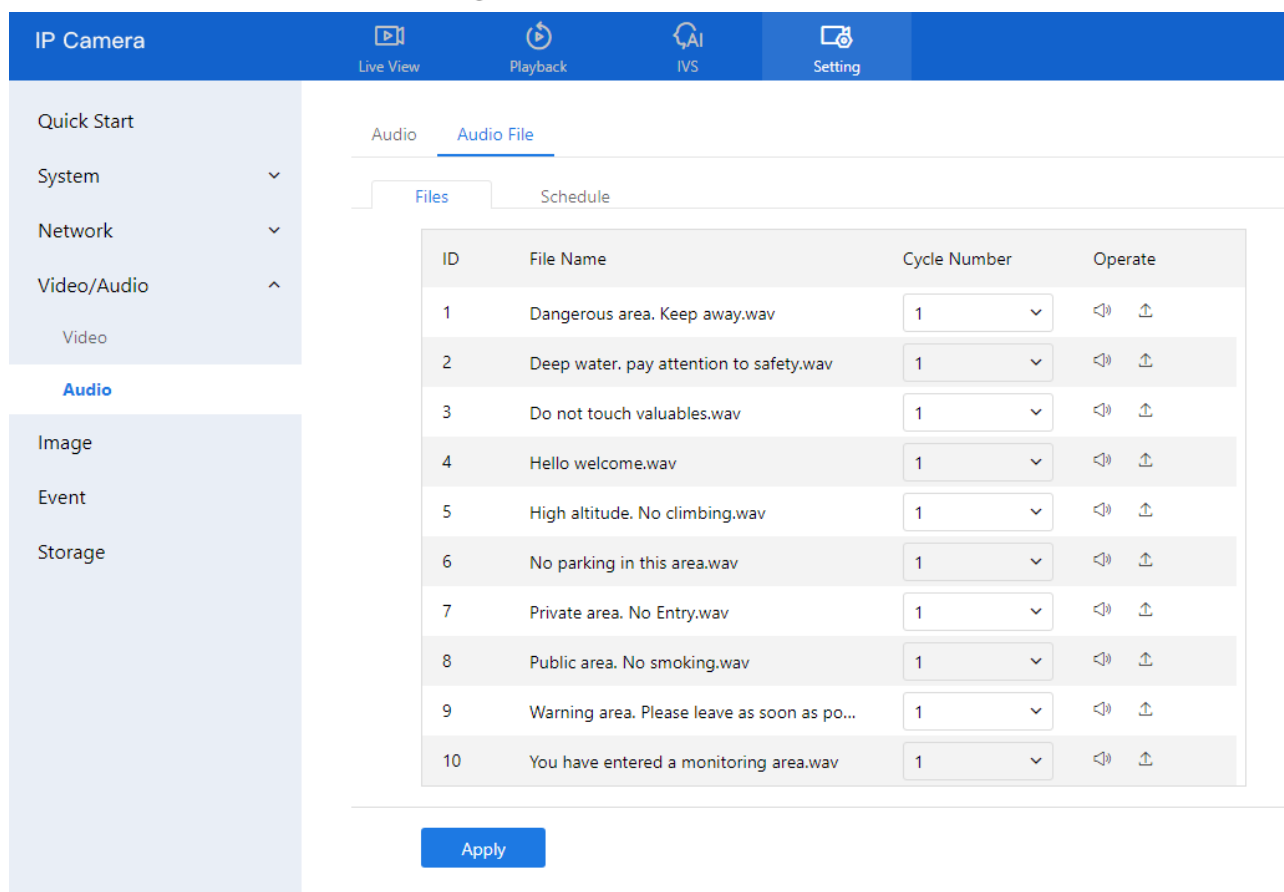

Step 2 The interface provides a list of 13 default audio files. For each file, you can:

- **Set Cycle Number:** The number of times the file will play when triggered.
- **Test Playback:** Click the (**speaker icon**) to listen to the file.

Step 3 To upload a custom audio file:

- Click the **Upload** icon.
- In the upload window, select a **WAV** file from your computer.
- **File requirements:**
- Format: .wav
- Size: less than **250 KB**
- Bitrate: **128 kbps**
- Click **Apply** to upload the file.

Step 4 . Click **Apply** to save the overall audio alarm configuration.

Step 5 CCVC Proceed to configure the **armed schedule** to define when audible alarms should be triggered.

6 Configuration Image

6.4 Configure Display

For detailed information, please refer to **Chapter 2.3**.

6.5 Configure OSD

For detailed information, please refer to **Chapter 2.4**


6.6 Configure the Privacy Mask

Procedure

Step 1 Navigate to **Setting > Image > Privacy Masking**.

The **Privacy Masking** page is displayed, as shown in Figure 6-1.

Figure 6-1 Privacy masking page

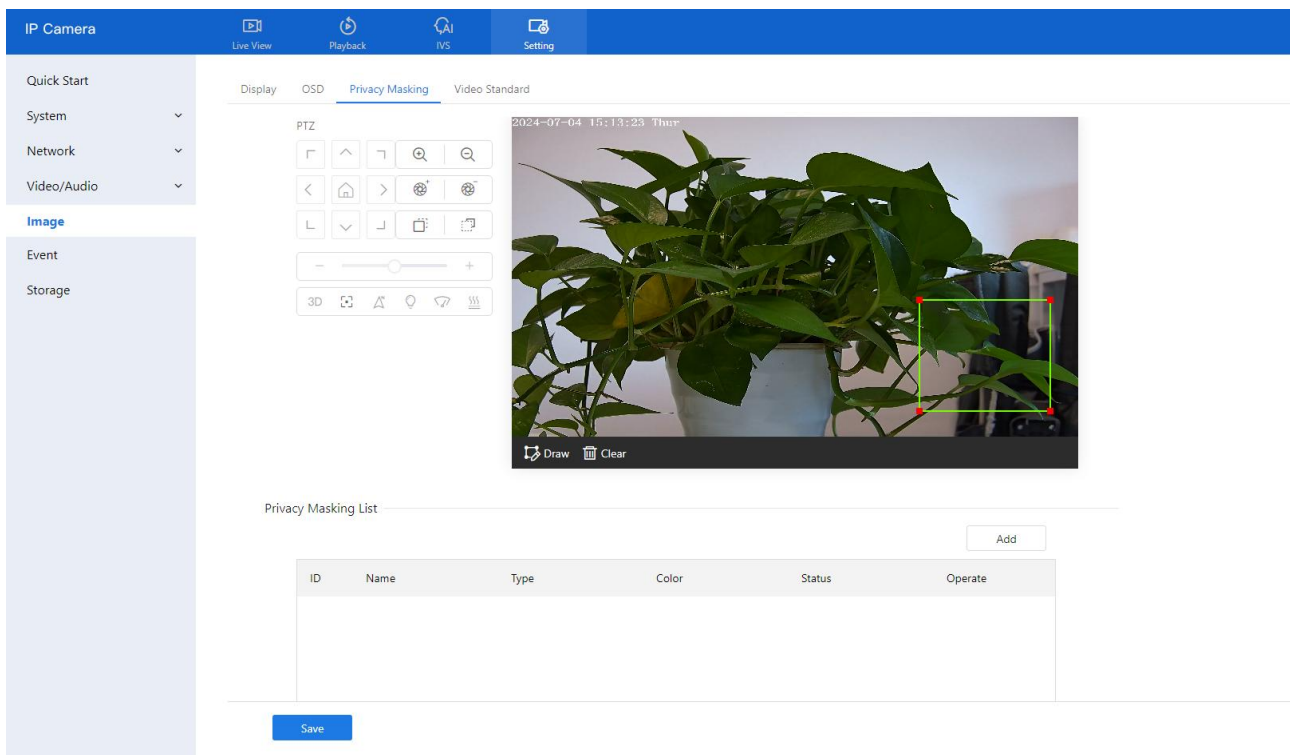

Step 2 Click **Draw** to display a red frame over the video preview. Drag the four corners of the rectangle to adjust its position and size.

Step 3 Click **Clear** to remove the selected frame.

NOTE

- The maximum maskable area depends on the device model (refer to on-screen tips).
- You can mask up to **four areas**.
- To delete a masking area: Tick the corresponding ID in the **Privacy Masking List**, then click **Delete**.

Step 4 Set the parameters according to Table 6-1.

Table 6-1 Parameters of privacy masking

Parameter	Description	Setting
ID	Identifier for each masking area.	N/A
Name	Name for the masking area.	[Setting method] Click the name and enter a value manually. [Default value] Blank
Type	Type of privacy masking.	[Setting method] Select a value from the drop-down list box. [Default value] Color Block
Color	Color of privacy masking.	[Setting method] Select a value from the drop-down list box. [Default value] Black
Enable	Indicates whether to enable the privacy masking.	[Setting method] Select a value from the drop-down list box. [Default value] Yes
Delete	Delete a privacy masking.	[Setting method] 6. Select a privacy masking from the Privacy Masking List. 7. Click Delete , the privacy masking is deleted successfully
Modify	Modify a privacy masking.	[Setting method] 8. Select a privacy masking from the Privacy Masking List. 9. Click a parameter and modify it. 10. Click Modify , the privacy masking is modified successfully

Step 5 Click **Add** to add privacy masking.

6.7 Configure Video Standard

Procedure

Step 1 Navigate to **Setting > Image > Video Standard**.

The **Camera** page is displayed, as shown in Figure 6-2. Set the video format parameters according to Table 6-2.

Figure 6-2 Camera page

The screenshot shows the 'IP Camera' web interface. The top navigation bar includes 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar has 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The 'Image' section is expanded, showing 'Display', 'OSD', 'Privacy Masking', and 'Video Standard'. The 'Video Standard' page has two settings: 'Standard' (set to 'NTSC') and 'Refresh Frequency' (set to '60'). An 'Apply' button is at the bottom.

Table 6-2 Parameters of camera

Parameter	Description	Setting
Video System	The options are as follows: ☐ PAL: Used in Europe and China mainland, India, Pakistan, etc. ☐ NTSC: Used in USA, Japan, South Korea, and Taiwan Province of China, etc.	[Setting method] Select a value from the drop-down list box. [Default value] PAL NOTE Whether the video system can be changed depends on the device model.
Video Refresh Frequency	The options are as follows: ☐ 50 Hz: corresponds to the PAL system. ☐ 60 Hz: corresponds to NTSC system.	[Setting method] Follow the video standard.

Step 2 Click **Apply**. If the message "**Apply success!**" is displayed, the settings are saved..

NOTE

If the message "**The device will restart, are you sure to modify?**" appears, confirm to proceed.
The system will restart and apply the new video standard.

7 Configure Event

Alarm linkage actions vary by camera model and hardware capabilities. Please refer to your specific device documentation for supported features.

7.4 Motion Alarm Linkage

Description

The **Motion Alarm** page allows you to:

- Enable or disable motion detection.
- Configure detection schedules and areas.
- Link motion events to alarms (e.g., audible alerts, recordings, light signals).
- Trigger notifications via FTP or SMTP.

When motion is detected within a predefined area and schedule, the camera generates an alarm and triggers the configured linkage actions.

Procedure

Step 1 Go to **Setting > Event > Motion Alarm**.

The **Motion Alarm** page is displayed, as shown in Figure 7-1.

Figure 7-1 Motion alarm page

The screenshot shows the 'Motion Alarm' configuration page. The left sidebar has a menu with 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event' (selected), and 'Storage'. The main content area has tabs for 'Motion Alarm', 'Alarm In', 'Alarm Out', 'Disk Alarm', 'Network Alarm', 'Day/Night Switch Alarm', 'Abnormal Sound Detection', and 'Push Message'. The 'Motion Alarm' tab is active. It contains sections for 'Status' (with a toggle switch), 'Alarm Interval' (set to 10), 'Sensitivity' (a slider), 'Motion Detect Stream' (a toggle switch), 'Event Actions' (with checkboxes for Output Channel, Audible Alarm, Alarm Record, SMTP, and FTP Upload), and 'Schedule' (a calendar view showing motion detection enabled from Sunday to Wednesday). A live video feed of a potted plant is shown on the right. At the bottom, there is an 'Apply' button.

Step 2 Configure all parameters, please refer to Table 7-1.

Table 7-1 Motion alarm parameters

Parameter	Description	Setting
Status	Enables or disables motion detection.	[How to set] Click Enable to enable. [Default value] OFF
Alarm Interval	Sets the time interval (1–1800 seconds) during which repeated alarms are suppressed.	[How to set] Input a value, 1~1800s
Sensitivity	Determines motion detection sensitivity. Higher values detect smaller movements but may reduce accuracy.	[How to set] Choose from the drop-down list [Default value] 5
Motion Detect Stream	Enables or disables motion detection.	[How to set] Click to enable [Default value] OFF
Output Channel	Enables or disables motion detection.	[How to set] Click to select an ID.
Audible Alarm	Triggers audio warning playback (configured in Setting > Video/Audio > Audio File).	[How to set] Click to enable Audible alarm [Default value] OFF
Alarm Record	Records alarm-triggered video to the SD card.	[How to set] Click to enable alarm record. [Default value] OFF
SMTP	Sends alarm notifications via email. SMTP must be configured..	[How to set] Click to enable SMTP. [Default value] OFF
FTP Upload	Uploads alarm snapshots to an FTP server. FTP must be configured.	[How to set] Click to enable FTP Upload. [Default value] OFF

Parameter	Description	Setting
White Light Alarm	The camera should have white light or dual lights. Flickers white light during an alarm (only on supported models).	[Setting method] Click to enable White Light Alarm [Default value] OFF
Red and Blue Light Alarm	The camera should have red and blue light. Flickers alternating red and blue lights during an alarm (only on supported models).	[Setting method] Enable Red and Blue Light Alarm [Default value] OFF

Step 3 Enable **Motion Detect Stream** if you want to visualize object tracking during motion events.

Step 4 Configure Deployment Schedule.

Method 1: Click and drag within the time grid (00:00–24:00) from Monday to Sunday.

Method 2: Click **Select All** to apply full-time deployment for all days.

Method 3: Set one day's schedule and click the **Copy icon** to replicate it to other days.

Figure 7-2 Copy

Copy:

☐ All

☐ Sun

☐ Mon

☐ Tue

☒ Wed

☐ Thu

☐ Fri

☐ Sat

OK

To delete all time slots, click **Clear All**.

To remove a specific time block, click it and then click **Delete**.

08:30 ~ 10:00 OK Delete


Configure the detection area.

Step 1 Press and hold the left mouse button and drag over the video preview to draw the detection zone (see Figure 7-3).

Step 2 To remove an area, click **Clear**.

Step 3 To disarm a specific block, click on the red grid square.

Figure 7-3 Motion area setting page

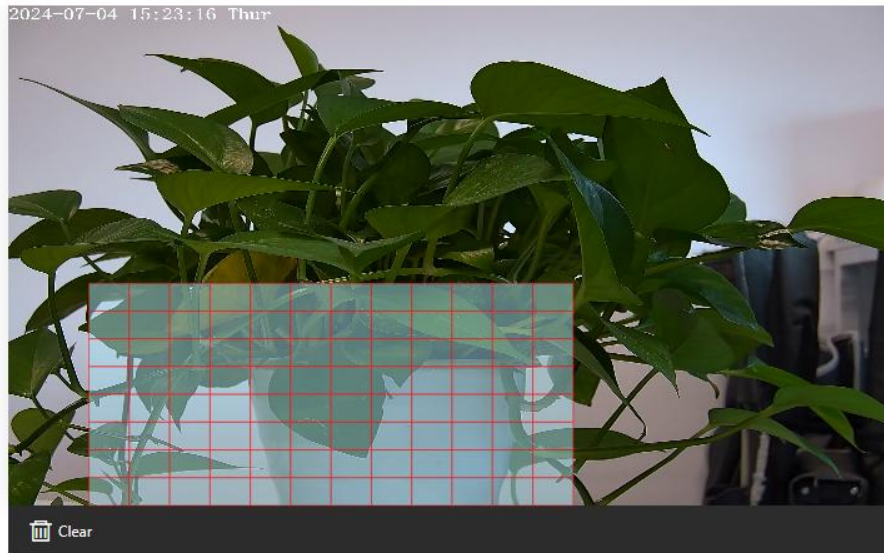

 NOTE

Click **Clear** to delete a detection area. Click the red block to disarm this area.

Step 4 If the message "**Apply success!**" is displayed, all configurations are saved successfully.

7.5 Alarm In (Only for Some Models)

Description

When an external alarm is received through the **alarm input port**, the device can trigger various alarm linkages based on the configuration.

The **Alarm In** page allows you to:

- Enable or disable I/O alarm inputs
- Configure schedules for alarm input monitoring
- Link inputs to other actions such as audible alerts, light warnings, or alarm recording

Procedure

Step 1 Navigate to **Setting > Event > Alarm In**.

The **Alarm In** page is displayed, as shown in Figure 7-4.

Figure 7-4 Alarm in page

Step 2 Set the parameters as outlined in Table 7-2

Table 7-2 Parameters of I/O alarm linkage

Parameter	Description	Setting
Alarm input	ID of the alarm input channel. NOTE The number of alarm input channels depends on the device model.	[Setting method] Select a value from the drop-down list box. [Default value] 1
Name	Alarm input channel name.	[Value range] 0 to 32 bytes
Trigger Mode	The options are as follows: ☐ Connect: An alarm is generated when an external alarm device is connected. ☐ Disconnect: An alarm is generated when the external alarm device is disconnected.	[Setting method] Select a value from the drop-down list box. [Default value] Connect

Parameter	Description	Setting
Status	When the device receives alarm in signals, the device sends the alarm information to an external alarm device. ☐	[Setting method] Enable [Default value] OFF
Output channel	Linkage the output channel alarm device to send alarm information.	[Setting method] Tick
Audible Alarm	After enabling Audible Warning and setting Audible Alarm Output, the built-in speaker of the device or connected external speaker plays warning sounds when an alarm happens. (set at the “ Setting > Video / Audio > Audio File ”)	[How to set] Click to enable Audible alarm [Default value] OFF
IR Cut	The camera should have IR light. When an alarm occurs, the device will open the IR light to send alarm information.	[Setting method] Enable [Default value] OFF
Alarm Record	The device will record alarm with SD card.	[Setting method] Enable [Default value] OFF
SMTP	When an alarm occurs, the device will send mail. The mail parameters should be set in advance.	[Setting method] Enable [Default value] OFF
FTP Upload	When an alarm occurs, the device will send alarm information to FTP server. The FTP parameters should be set in advance.	[Setting method] Enable [Default value] OFF
White Light Alarm	The camera should have white light or dual lights. When an alarm occurs, the device will flicker the white light.	[Setting method] Enable [Default value] OFF
Red and Blue Light Alarm	The camera should have red and blue light. When an alarm occurs, the device will flicker alternating red light and blue light.	[Setting method] Enable [Default value] OFF

Step 3 Set the **Deployment Schedule** using the same method as described in, please refer to 7.4 Step 4.

Step 4 Click **Apply**. If the message "**Apply success!**" is displayed, the settings are saved.

7.6 Alarm Out (Only for Some Models)

Procedure

Step 1 Navigate to **Setting > Event > Alarm Out**.

The **Alarm Out** page is displayed, as shown in Figure 7-5.

Figure 7-5 Alarm output page

Step 2 Configure the parameters according to Table 7-3.

Table 7-3 Parameters of alarm output

Parameter	Description	Setting
Alarm Output	ID of the alarm output channel. NOTE The number of alarm output channels depends on the device model.	[Setting method] Select a value from the drop-down list box. [Default value] 1
Name	Alarm output channel name.	[Value range] 0 to 32 bytes
Valid Signal	The options are as follows: ☐ Close : An alarm is generated when an external alarm signal is received. ☐ Open : An alarm is generated when no external alarm signal is received.	[Setting method] Select a value from the drop-down list box. [Default value] Close

Parameter	Description	Setting
Alarm Output Mode	When the device receives I/O alarm signals, the device sends the alarm information to an external alarm device in the mode specified by this parameter. The options include the switch mode and pulse mode. NOTE ☐ If the switch mode is used, the alarm frequency of the device must be the same as that of the external alarm device. ☐ If the pulse mode is used, the alarm frequency of the external alarm device can be configured.	[Setting method] Select a value from the drop-down list box. [Default value] Switch Mode
Follow Source	Alarm output follows the duration of the alarm source.	[Setting method] Enable [Default value] OFF
Alarm Time (ms) (0: Continuous)	The status of alarm in is on. Alarm output duration. The value 0 indicates that the alarm remains valid.	[Setting method] Enter a value manually. [Default value] 0 [Value range] 0 to 86400 seconds
Timing Alarm Output	Enable timing alarm output, set the schedule to time alarm. NOTE If there are two alarm outputs, this setting is only valid for Alarm output 1.	[Setting method] Enable [Default value] OFF
Manual Control	Control the alarm output.	N/A

Step 3 Click **Apply**. If "Apply success!" appears, the settings have been saved successfully.

7.7 Disk Alarm

Procedure

Step 1 Navigate to **Setting > Event > Disk Alarm**.
The **Disk Alarm** page is displayed, as shown in Figure 7-6.

Figure 7-6 Disk alarm page

The screenshot shows the 'Disk Alarm' configuration page. The left sidebar has a menu with 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The 'Event' section is expanded, showing 'Disk Alarm' as the selected option. The main content area has tabs for 'Motion Alarm', 'Alarm In', 'Alarm Out', 'Disk Alarm', 'Network Alarm', 'Day/Night Switch Alarm', 'Abnormal Sound Detection', and 'Push Message'. Under the 'Disk Alarm' tab, there are three settings: 'Disk Full Alarm' with a toggle switch turned on, 'Alarm Interval' with a text input field containing '10' and a range '(10~86400)S' to its right, and 'Output Channel' with a checkbox labeled '1'. An 'Apply' button is at the bottom right of the settings area.

Step 2 Click the toggle button on to enable disk alarm.

Step 3 Configure the **Alarm Interval**. This sets how often the system triggers alarms for disk issues. Enter a value in seconds (range: 10–86400).

Step 4 Select the **Out Channel** number (Please refer to the actual product).

Step 5 Click **Apply**. When the message "**Apply success!**" appears, the configuration is saved.

7.8 Network Alarm

Procedure

Step 1 Navigate to **Setting > Event > Network Alarm**.

The **Network Alarm** page is displayed, as shown in Figure 7-7.

Figure 7-7 Network alarm page

The screenshot shows the 'Network Alarm' configuration page. The left sidebar is the same as in Figure 7-6, with 'Event' expanded and 'Network Alarm' selected. The main content area has the same tabs as Figure 7-6, with 'Network Alarm' selected. Under the 'Network Alarm' tab, there are two settings: 'Network Card ID' with a dropdown menu showing '1', and 'Abnormal Alarm' with a toggle switch turned on. An 'Apply' button is at the bottom right of the settings area.

Step 2 Click the toggle button to enable **Abnormal Alarm**. The system will monitor the network interface for abnormalities.

Step 3 Configure the Network Alarm Interval. Enter how frequently the system should check for network errors.

Step 4 Select the **Output Channel** for alarm notifications. You may also enable **Alarm Record** if an SD card is installed.

Step 5 Click **Apply**. A message stating "Apply success!" confirms that settings have been saved.

7.9 Day/Night Switch Alarm

Description

The **Day/Night Switch Alarm** function triggers an alert whenever the camera switches between day and night modes according to the defined schedule.

Procedure

Step 1 Navigate to **Setting > Event > Day/Night Switch Alarm**.
The **Day/Night Switch Alarm** page is displayed, as shown in Figure 7-8.

Figure 7-8 Day/Night switch alarm

The screenshot shows the 'Day/Night Switch Alarm' configuration page. The left sidebar contains a menu with 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event' (highlighted), and 'Storage'. The top navigation bar includes 'Live View', 'Playback', 'IVS', and 'Setting'. The main content area has tabs for 'Motion Alarm', 'Alarm In', 'Alarm Out', 'Disk Alarm', 'Network Alarm', 'Day/Night Switch Alarm' (selected), 'Abnormal Sound Detection', and 'Push Message'. Under 'Event Actions', there are four settings: 'Status' (toggle on), 'Output Channel' (checkbox 1), 'Alarm Record' (toggle on), and 'SMTP' (toggle on). Below these is the 'FTP Upload' (toggle on). The 'Schedule' section shows a 24-hour timeline with blue bars indicating the alarm is active from 0 to 24 hours for all days of the week (Sun, Mon, Tue, Wed, Thu, Fri, Sat). At the bottom, there are 'Select All' and 'Clear All' buttons, and an 'Apply' button.

Step 2 Click the toggle to **enable Day/Night Switch Alarm**.

Step 3 Configure the **alarm schedule**.

Define the specific time ranges during which the alarm should be active.

Step 4 Enable **Alarm Record** if you want the event recorded to an SD card.

Toggle the switch to activate.

Step 5 Enable **SMTP** if you wish to receive an email notification.

SMTP must be configured under **Network > Advanced Settings > SMTP**.

Step 6 Enable **FTP Upload** to send alarm data to an FTP server.

FTP must be pre-configured in system settings.

Step 7 Click **Apply**.

When the message "**Apply success!**" appears, the settings are successfully saved.

7.10 Abnormal Sound Detection (Only for Some Models)

Description

The camera is equipped with a built-in microphone or supports external audio input (Line In). On the **Audio Abnormal Detection** page, you can perform the following actions:

- Enable the **Abnormal Sound Detection** function.
- Set the schedule during which abnormal sound detection is active.
- Configure the alarm output channel for abnormal sound events.

When this function is enabled and a sudden rise or drop in audio levels is detected during the scheduled time, the camera triggers an alarm and executes the corresponding linkage actions.

Procedure

Step 1 Navigate to **Setting > Event > Abnormal Sound Detection**.
The **Audio Abnormal Detection** page is displayed, as shown in Figure 7-9.

Figure 7-9 Audio abnormal detection page

The screenshot shows the 'Abnormal Sound Detection' configuration page. The left sidebar contains a menu with 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event' (selected), and 'Storage'. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'iVMS', 'Setting', and 'Push Message'. The main content area has tabs for 'Motion Alarm', 'Alarm In', 'Alarm Out', 'Disk Alarm', 'Network Alarm', 'Day/Night Switch Alarm', 'Abnormal Sound Detection' (selected), and 'Push Message'. Under the 'Settings' section, there are three toggle switches: 'Status' (enabled), 'Sudden Rise' (disabled), and 'Sudden Drop' (disabled). The 'Event Actions' section includes 'Output Channel' (set to 1), 'Alarm Record' (disabled), 'SMTP' (disabled), and 'FTP Upload' (disabled). The 'Schedule' section features a 24-hour timeline (0 to 24) and a table for selecting days of the week (Sun, Mon, Tue, Wed, Thu, Fri, Sat) for scheduling. At the bottom, there are 'Select All', 'Clear All', and 'Apply' buttons.

Step 2 Click the toggle button to **enable Audio Abnormal Detection**.

Step 3 Enable either or both of the following:

Sudden Rise — detects sharp increases in sound level.

Sudden Drop — detects sharp decreases in sound level.

Step 4 Select the **Output Channel** for triggering the external alarm.

Step 5 Click the toggle button on to enable **Alarm Record**, **SMTP**, **FTP Upload**.

Step 6 Configure the **Schedule** (deployment time). For details about how to set **Schedule**, please refer to 7.4 Step 4.

7.11 Push Message


Description

When alarms are triggered, a notification can be pushed to the mobile app (if the device is connected to and managed through the app).

Procedure

Step 1 Navigate **Setting > Event > Push Message**.
The **Push Message** page is displayed, as shown in Figure 7-10.

Figure 7-10 Push message page

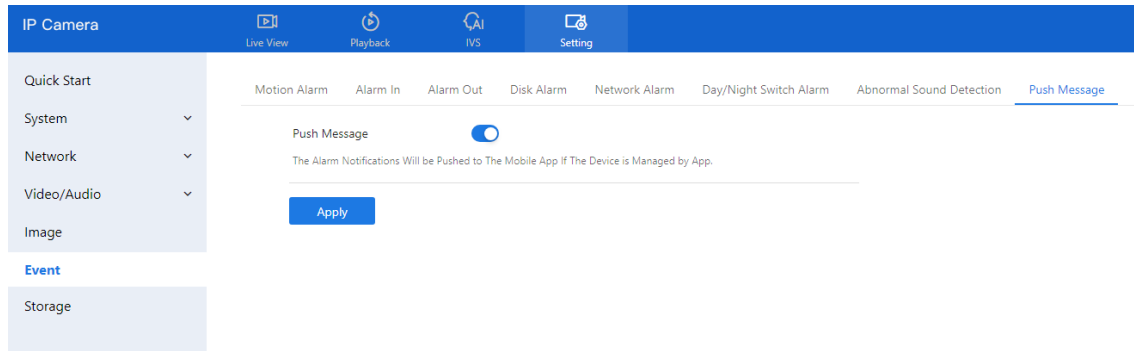


Step 2 Click **Apply**. A message stating "**Apply success!**" will confirm the configuration is saved.

7.12 Flashlight Alarm Output (Only for Some Models)

Step 1 Go to **Setting > Event > Flashlight Alarm Output** interface and set the schedule to enable flashlight alarm, as shown in Figure 7-11.

Figure 7-11 Flashlight alarm page

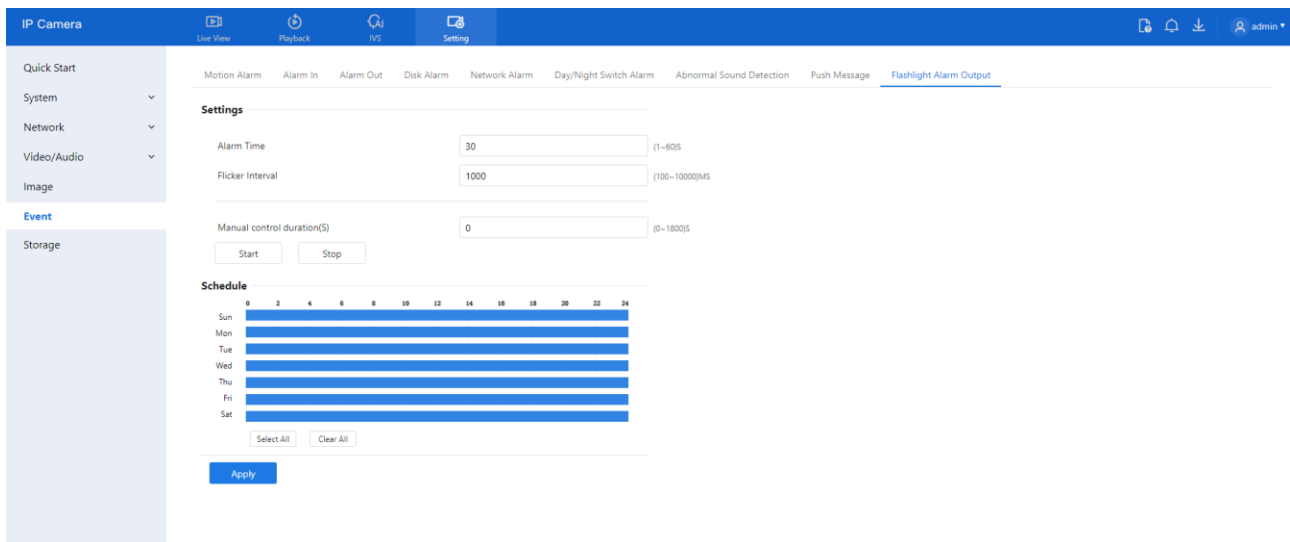

Step 2 Configure the **Alarm Duration** and **Flicker Interval**.

Step 3 Set the **Manual Control Duration**:

Click **Start** to turn on the flashlight manually for the set time.

Click **Stop** to end the flashlight operation manually.

Step 4 Set the **Schedule** to determine when the flashlight alarm should be active.

Step 5 Click **Apply**.

The message "**Apply success!**" confirms the settings are saved.

7.13 White Light Alarm Output

This alarm requires the **Day/Night mode** to be set to **Night**, and the light type to be **IR LED** or **None**. When triggered, the camera's white light turns on as part of the alarm response.

Step 1 Navigate to **Setting > Event > White light Alarm Output**. The **White Light Alarm** page appears, as shown in Table 8-3.

Figure 7-12 White light alarm page

The screenshot shows the 'White Light Alarm Output' configuration page. The left sidebar has a menu with 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event' (selected), and 'Storage'. The top navigation bar includes 'Live View', 'Playback', 'I/O', 'Setting' (selected), and user controls. The main content area has tabs for 'Motion Alarm', 'Alarm In', 'Alarm Out', 'Disk Alarm', 'Network Alarm', 'Day/Night Switch Alarm', 'Abnormal Sound Detection', 'Push Message', 'White Light Alarm Output' (selected), and 'Red and Blue Light Alarm Output'. Under the 'Settings' section, there are fields for 'Alarm Duration' (set to 20, range 10-60S), 'Flicker Mode' (set to Steady-on Mode), and 'Manual control duration(S)' (set to 0, range 0-1800S). There are 'Start' and 'Stop' buttons. The 'Schedule' section shows a 24-hour clock and a 7-day grid where all days are selected with blue bars. There are 'Select All', 'Clear All', and 'Apply' buttons.

Step 2 Set the **Alarm Duration** — the length of time the white light stays on after an alarm is triggered.

Step 3 Set the **Deployment Schedule** — specify when the white light alarm should be active.

Step 4 Click **Apply**.

The message "**Apply success!**" indicates the settings are stored.

7.14 Red and Blue Light Alarm Output

When enabled, the camera flashes **alternating red and blue lights** upon alarm triggers. This feature is available only on supported models.

Step 1 Navigate to **Setting > Event > Red and Blue light Alarm Output**. The **Red and Blue Light Alarm** page appears, as shown in Table 8-3.

Figure 7-13 Red and blue light alarm output page

The screenshot shows the 'Red and Blue Light Alarm Output' configuration page. The layout is similar to Figure 7-12. The 'Settings' section includes 'Alarm Time' (set to 10, range 10-60S), 'Scintillation Frequency' (set to 50, range 0-5000ms), and 'Manual control duration(S)' (set to 0, range 0-1800S). There are 'Start' and 'Stop' buttons. The 'Schedule' section shows a 24-hour clock and a 7-day grid where all days are selected with blue bars. There are 'Select All', 'Clear All', and 'Apply' buttons.

Step 2 Set the **Alarm Duration** — controls how long the lights remain active during an alarm.

Step 3 Choose the **Flicker Frequency**:

High

Mid

Low

Step 4 Set the **Manual Control Duration**:

Click **Start** to activate the alarm manually for the defined duration.

Click **Stop** to end manual flashing.

Step 5 Define the **Deployment Schedule** — specify when the red/blue light alarm should be active.

Step 6 Click **Apply**.

The message "**Apply success!**" confirms the settings have been saved.

8 Configure Storage Function



NOTE

Some models do not support SD cards. If unsupported, recording functionality will be disabled. Please refer to the specifications of your actual device.

8.4 Record Strategy

You can configure the scheduled recording, alarm recording duration, audio recording, storage rules, and stream selection.

Procedure

Step 1 Navigate to **Setting > Storage > Record Strategy**.

The **Record Strategy** page is displayed, as shown in Figure 8-1.

Figure 8-1 Record strategy page

The screenshot shows the 'Record Strategy' configuration page. The 'Schedule Record' toggle is turned on. The 'Alarm Post Record*' is set to 10 seconds. 'Record Audio' is turned off. The 'Record Rule' is set to 'Overwrite'. The 'Stream Name' is 'stream1'. The 24-hour schedule grid shows all hours selected for all days of the week. There are 'Select All' and 'Clear All' buttons below the grid, and an 'Apply' button at the bottom.

Step 2 Configure the parameters according to Table 8-1.

Table 8-1 Parameters of recording policy

Parameter	Description	Setting
Schedule Record	Enables time-based recording.	[Setting method] Click the button on to enable schedule record. [Default value] OFF

Parameter	Description	Setting
Alarm Post Record	Time in seconds to continue recording after an alarm. (0–86400 sec)	[Setting method] Enter a value manually.
Record Audio	Records audio along with video.	[Setting method] Click the button on to enable record audio.
Record Rule	Rule for saving recordings. The options are as follows: ☐ Cycle Store: Saves recordings in cycles. ☐ Save Days: Duration (in days) for saving a recording. The duration can be a maximum of 99999 days. NOTE The value 0 indicates that recordings are not overwritten.	[Setting method] Select a value from the drop-down list box.
Stream Name	Specifies the stream used for recording.	[Setting method] Select a value from the drop-down list box.

Step 3 Configure the **Schedule** (deployment time). Refer to section 7.4 Step 4.

Step 4 Click **Apply**.

If the message "Apply success!" appears, settings are saved successfully.

If other information is displayed, set the parameters correctly.

8.5 Record Directory

Description


Recordings can be saved to an **SD Card**, **FTP**, or **NAS** (Network Attached Storage), depending on your device model.

Procedure

Step 1 Go to Setting > Storage > Record Directory.

The **Record Directory** page will appear, as shown in Figure 8-2.

Figure 8-2 Record directory page

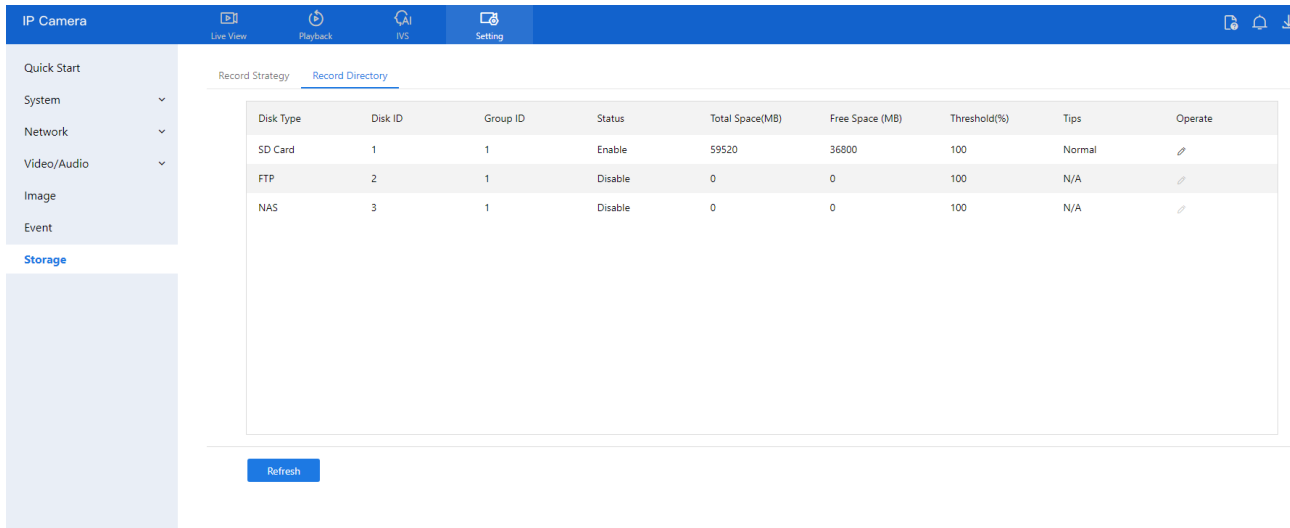

Step 2 Set the parameters according to Table 8-2.

Table 8-2 Parameters of Record directory

Parameter	Description	Setting
Disk Type	Recording device type (e.g., SD card, FTP, NAS).	[Setting method] The parameter cannot be set manually.
Disk ID	Identification number of the disk.	
Group ID	Group assignment ID.	
Enable	Enables selected storage.	
Total Space (MB)	Total capacity of the storage device.	
Free Space (MB)	Remaining usable space.	
Alarm Threshold (%)	Triggers alarm when used space exceeds this threshold.	
Status	Shows connection status of the storage device.	

Step 3 Click **Modify** to update directory parameters.
(See Figure 8-3).

Figure 8-3 Record path modify

Record Strategy Record Directory

Record Path Modify

SD Card ☒

Disk ID 1

Total Space(MB) 59520

Threshold (1~100)

Cancel Format Modify

8.5.2 Configure the SD Card

Procedure

Step 1 Go to **Setting > Storage > Record Directory**

Step 2 Select SD Card, then click the edit icon.

Step 3 Set parameters as per Table 8-3.

Table 8-3 Parameters of SD card recording

Parameter	Description	Setting
SD Card	Enables SD card recording.	[Setting method] Click button to enable SD card.
Disk ID	Identifier of the SD card.	N/A
Total Space(MB)	Total disk capacity.	[Setting method] The parameter cannot be set manually.
Alarm Threshold (1-100)	Set alert threshold for used space (1-100).	[Setting method] Enter a value from 1-100.

Step 4 Click **Apply**.

Message "**Apply success!**" confirms the settings are saved.

8.5.3 Configure the FTP

Procedure

Step 1 **Step 1:** Navigate to **Setting > Storage > Record Directory**.

Ensure **SD card type is OFF**.

Step 2 **Step 2:** Choose **FTP** and click the **edit icon**.

The **FTP Record Path Modify** page appears (see Figure 8-4).

Figure 8-4 FTP record path modify page

Record Strategy Record Directory

Record Path Modify

FTP ☐

Mode

IP Address

Port

Path (Composed of numbers, letters, and underscores starting with / or \)

User Name

Password

Confirm

Total Space(>=512MB)

Step 3 Set the parameters according to Table 8-4.

Table 8-4 Parameters of FTP recording

Parameter	Description	Setting
FTP	Enables recording to an FTP server.	[Setting method] Enable
IP Address	IP address of FTP server.	[Setting method] Enter a value manually.
Port	Communication port for FTP.	[Setting method] Enter a value manually.
Path	FTP Directory path to store recordings.	[Setting method] Enter a value manually.
User Name	FTP server account.	[Setting method] Enter a value manually.
Password	FTP server password.	[Setting method] Enter a value manually.
Confirm	Confirm the password.	[Setting method] Enter a value manually.
Free Space (MB)	Available space on FTP server.	[Setting method] Enter a value.
FTP over SSL / TLS (FTPS)	Available space on FTP server.	[Setting method] Tick

Step 4 Click **Apply**. A message stating "**Apply success!**" confirms your settings.

8.5.4 Configure the NAS

Procedure

- Step 1 Navigate to **Setting > Storage > Record Directory**.
Ensure **SD card type is OFF**.
- Step 2 Choose **NAS** and click the **edit icon**.
The **NAS Record Path Modify** page is displayed (see Figure 8-5).

Figure 8-5 NAS record path modify page

Record Strategy Record Directory

Record Path Modify

NAS ☐

IP Address

Path

User Name

Password

Confirm

File System cifs

Cancel Modify

Step 3 Set the parameters according to Table 8-5.

Table 8-5 Parameters of NAS recording

Parameter	Description	Setting
NAS	Enables video storage to NAS.	[Setting method] Enable
IP Address	IP address of the NAS server.	[Setting method] Enter a value manually.
Path	IP address of NAS device.	[Setting method] Enter a value manually.
User Name	NAS device account.	[Setting method] Enter a value manually.
Password	NAS device Password.	[Setting method] Enter a value manually.

Parameter	Description	Setting
Confirm	Confirm the password.	[Setting method] Enter a value manually.
File System	Choose between CIFS and NFS protocols.	[Setting method] Choose from drop-down list. [Default value] cifs

Step 4 Click **Apply**.

The message "**Apply success!**" confirms the settings have been stored.

9 IVS Settings

9.4 Configure AI Multi-Target

Step 1 Navigate to **IVS > Deep Learning > AI Multi-Target**. The **AI Multi-Target** to set page is displayed as shown in Figure 9-1.

Figure 9-1 AI Multi-Target page

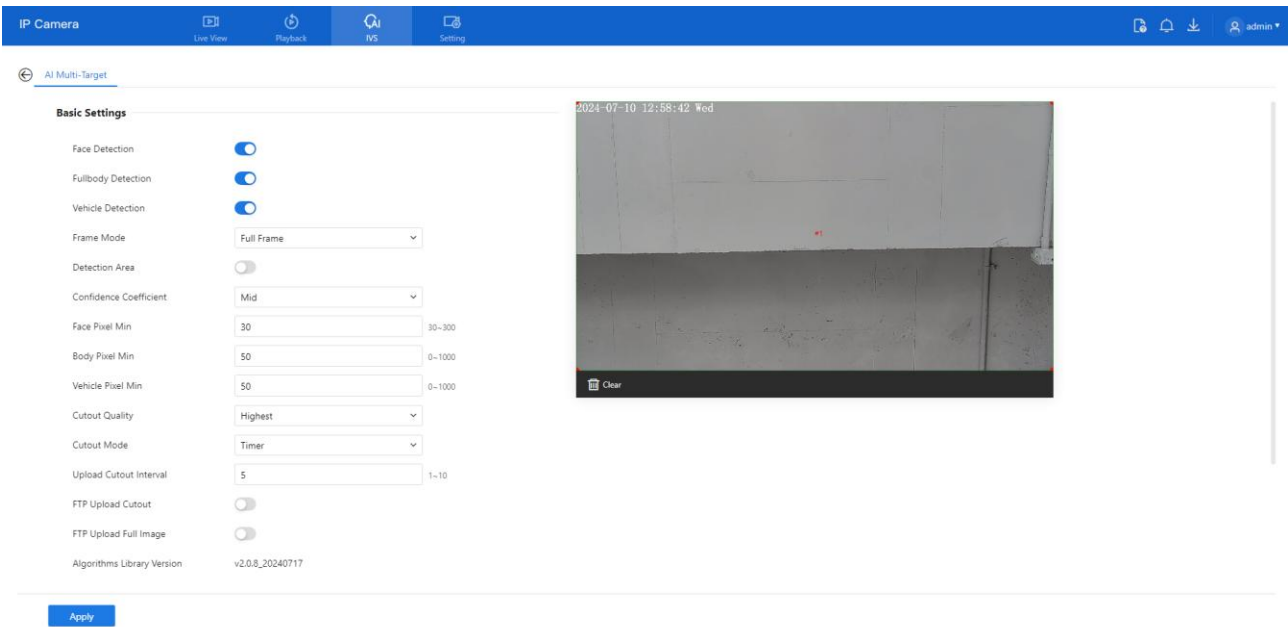


Table 9-1 lists the AI Multi-Target parameters.

Table 9-1 Parameters of AI Multi-Target

Parameter	Description	How to set
Face Detection	Enables face capture when a person appears in the live video.	Enable
Full body Detection	Enables full-body capture when a person appears.	Enable
Vehicle Detection	Captures vehicle when it appears in the video feed.	Enable
Frame Mode	Display box style in live view: Full Frame, Four-Corner, Mosaic, or OFF.	Choose from drop list.
Detection Area	Shows detection area on the live video feed.	
Confidence Coefficient	Sets detection confidence (High, Mid, Low). Higher = better accuracy.	Choose from drop list.
Face Pixel Min (30-	Minimum face pixel for capture (30–300).	Input a value

Parameter	Description	How to set
	Below this value, faces aren't captured.	range 30 to 300
Body Pixel Min (30-300)	Minimum full-body pixel for capture (30–300).	Input a value range 30 to 300
Vehicle Pixel Min (30-300)	Minimum vehicle pixel for capture (30–300).	Input a value range 30 to 300
Cutout Quality	Snapshot quality: Low, Mid, High.	Choose from drop list.
Cutout Mode	Cutout capture mode: Timing or Optimal.	Choose from drop list.
Upload Cutout Interval	Time interval between snapshots in Timing mode (1–10 seconds).	Input a value range 1 to 10
FTP Upload Cutout	Uploads snapshots to FTP (configured under Configuration > Network Service > FTP).	Enable
FTP Upload Full Image	Uploads the entire image to FTP.	Enable

Step 2 Set the **deployment schedule**. Refer to **Section 7.4 Step 4**.

Step 3 Click **Apply**. The message "**Apply succeed!**" confirms that settings are saved.

9.5 Configure Intelligent Analysis

9.5.1 Intrusion

Description

Generates an alarm when a target (person or vehicle) enters a defined detection area.

Procedure

Step 1 Go to **IVS > Intelligent Analysis > Intrusion**.

The **Intrusion Settings** page appears (see Figure 9-2).

Step 2 Set the intrusion parameters as listed below.

Figure 9-2 Intrusion settings page

Basic Settings

Status: ☒

Alarm Interval: 10 (1~1800s)

Sensitivity: 5

Limit Type: ☐

Area Listings

Area ID	Min	Max	Status
1	42 × 50	85 × 50	☒
2	42 × 50	85 × 50	☐
3	42 × 50	85 × 50	☐
4	42 × 50	85 × 50	☐

Event Actions

Output Channel: 1

Audible Alarm: ☒

Alarm Record: ☒

SMTP: ☒

Apply

Step 3 Set all parameters of intrusion. Table 9-2 describes the specific parameters.

Table 9-2 Intrusion parameter description

Parameter	Description	Setting
Status	Enables the intrusion alarm.	[How to set] Click the button on. [Default value] OFF
Alarm Interval	Time interval (in seconds) during which identical alarms will not be repeated (1–1800s).	[How to set] Input a value, 1~1800s
Sensitivity	Higher sensitivity increases detection but reduces accuracy.	[How to set] Choose from the drop-down list [Default value] 5
Limit Type	Choose detection target: Person, Car, or Both.	[How to set] Click the button on. [Default value] OFF
Area Listings	Set the areas will show in listings. Tick the status, the min and max detecting area show on area, you can drag the point to adjust the size of the detecting area, or modify the value directly.	[How to set] Set the detecting area.

Parameter	Description	Setting
Output Channel	If you check to set the Output Channel and the device is connected to an external alarm indicator, the alarm indicator signals when an alarm is triggered. Only for Some Models.	[How to set] Click to select an ID.
Audible Alarm	After enabling Audible Warning and setting Audible Alarm Output, the built-in speaker of the device or connected external speaker plays warning sounds when an alarm happens. (set at the “ Setting > Video / Audio > Audio File ”).	[How to set] Click to enable Audible alarm [Default value] OFF
Alarm Record	The device will record alarm with SD card.	[How to set] Click to enable alarm record. [Default value] OFF
SMTP	Enable the button to enable SMTP serve.	[How to set] Click to enable SMTP. [Default value] OFF
FTP Upload	Enable the button to enable File Transfer Protocol.	[How to set] Click to enable FTP Upload. [Default value] OFF
Flashlight Alarm	After enabling Flashing Light and setting the Flashing Light Alarm Output, the light flashes when an alarm event is detected.	[How to set] Click the button on. [Default value] OFF
White light Alarm	When the Day/Night mode is chosen Night mode, and the light is IR LED or NONE , this linkage action is valid. Enable to white light alarm when it triggers the alarm, the white light will be on. Only for Some Models.	[How to set] Click the button on. [Default value] OFF

Parameter	Description	Setting
Red and Blue Light Alarm	The camera should have red and blue light. When an alarm occurs, the device will flicker alternating red light and blue light.	[Setting method] Enable Red and Blue Light Alarm [Default value] OFF

Step 4 Set a deployment area.

To configure the detection area:

Step 1 **Move the cursor** to the drawing interface.

Step 2 **Click to create a point**—this marks the starting vertex of the area.

Step 3 **Move the cursor and click again** to create the next point, forming a line segment.

Step 4 **Repeat** this process to form a polygon that outlines the detection area.

Step 5 Once your shape is complete, **right-click** to finish the drawing.

Note:

- Lines cannot intersect each other.
- Each shape can have **up to 8 sides**.
- You can draw **up to 8 separate detection areas**.

See **Figure 9-3** for a visual reference of the drawing interface.

Figure 9-3 Deployment area setting page



9.5.2 Smart Motion


Description

Smart motion detection generates an alarm when specified target objects—such as people, vehicles, or both—move within a predefined area.

Procedure

Step 1 Go to **IVS > Intelligent Analysis > Smart Motion**. The **Smart Motion settings** page appears as shown in Figure 9-4.

Figure 9-4 Smart motion settings page

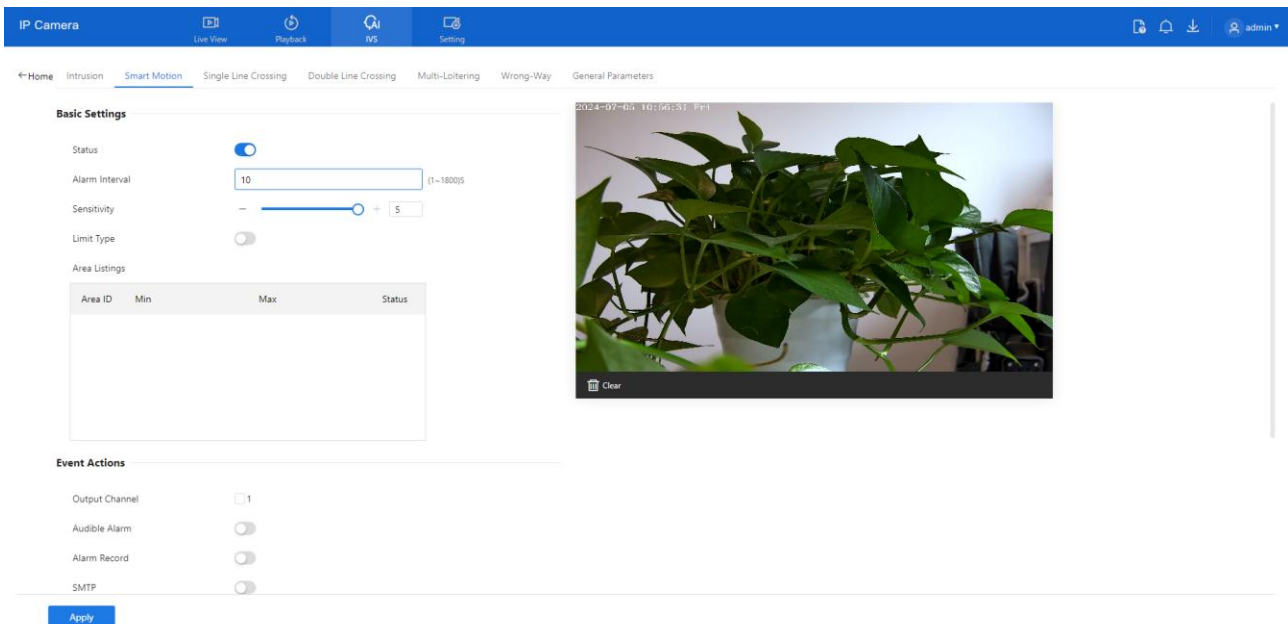

Step 2 Configure all parameters. Refer to section 9.5.1 Step 3 for details

Step 3 Define the **detection area**:

- Move the cursor to the live view.
- Click to place the first point.
- Continue clicking to form a polygonal area.
- **Right-click** to finish drawing.

NOTE

- Lines **must not intersect**.
- You can draw a shape with up to **8 sides**.
- You can define up to **8 deployment areas**.

Step 4 Set the deployment time. Refer to 7.4 Step 4.

Step 5 Click **Apply**. A message "Apply success!" will confirm that the settings have been saved.

9.5.3 Single Line Crossing

Description


Single line crossing detection monitors a virtual line placed in the camera's field of view. An alarm is triggered when a target (such as a person or vehicle) crosses the line in a specified direction.

Procedure

Step 1 Go to **IVS > Intelligent Analysis > Single Line Crossing**.

The **Single Line Crossing** settings page appears, as shown in Figure 9-5.

Figure 9-5 Single line crossing setting interface

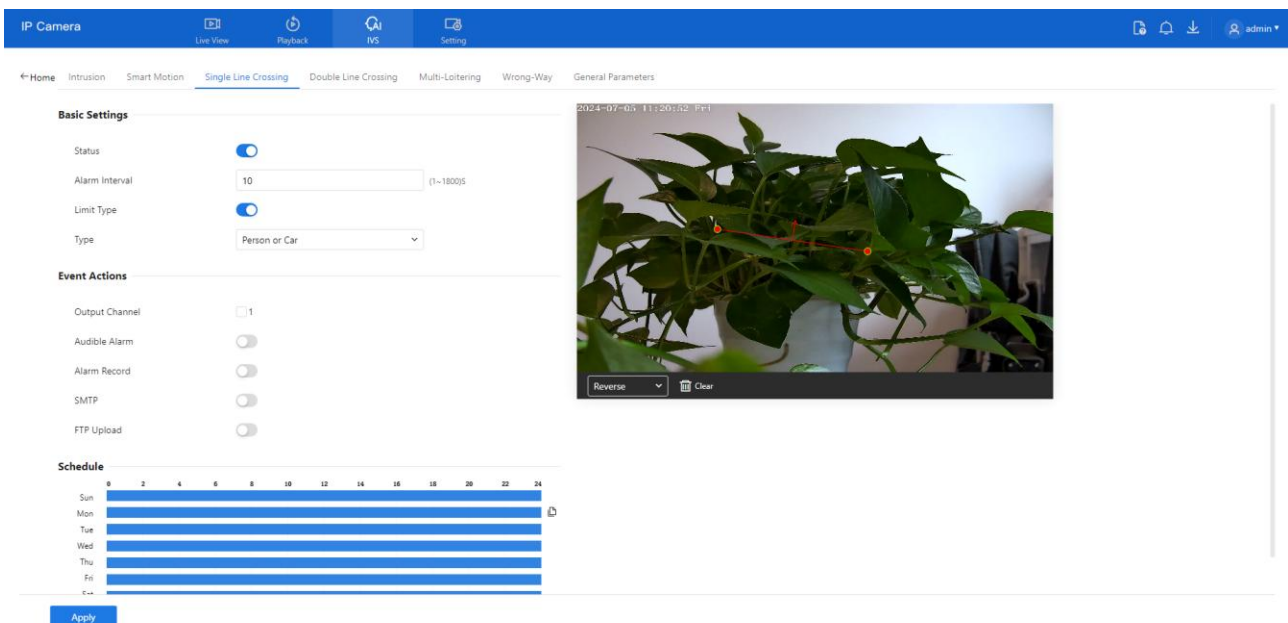


Step 2 Set all parameters of the single line crossing, please refer to 9.5.1 Step 3.

Step 3 Draw and configure the crossing line:

- Hold down the **left mouse button** and draw a straight line.
- Release the button to create the single line crossing.
- **Click** the line to select it (it turns red when selected).
- Set the direction: **Positive**, **Reverse**, or **Bidirectional**.
- To reposition the line, drag from either endpoint.
- **Right-click** to delete the line, as shown in Figure 9-6.

Figure 9-6 Deployment area setting page

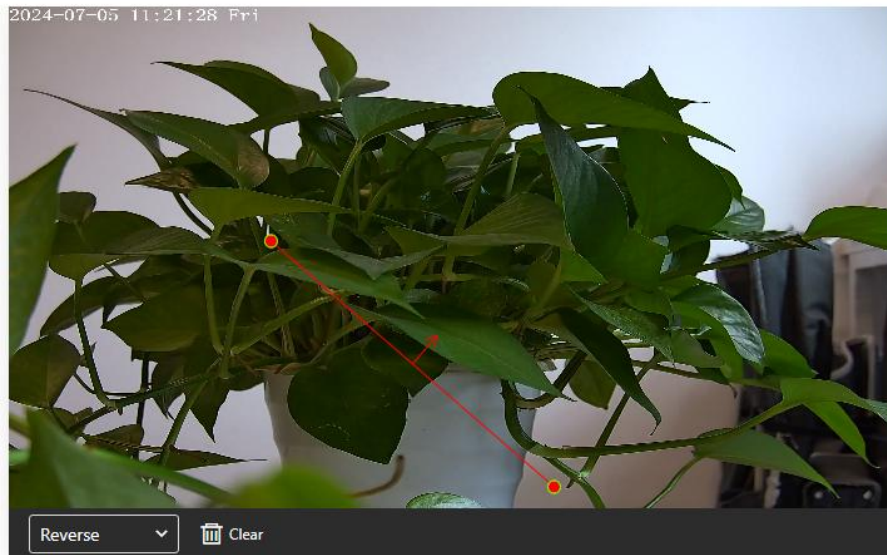

 NOTE

- Draw the line toward the center of the screen for better recognition timing.
- Ensure the line is long enough short lines may miss detection, especially for targets recognized by foot position.

Step 4 Set the deployment time. Refer to section 7.4 Step 4.

Step 5 Click **Apply**. A message "Apply success!" will confirm that the settings have been saved.

9.5.4 Double Line Crossing


Description

Double line crossing defines two virtual lines in the monitored area. An alarm is triggered when a target (such as a person or vehicle) crosses both lines in a specific direction and order—first Line 1, then Line 2—within a predefined time frame.

Procedure

Step 1 Navigate to **IVS > Intelligent Analysis > Double Line Crossing** to access the **Double Line Crossing** setting interface, as shown in Figure 9-7.

Figure 9-7 Double line crossing settings interface

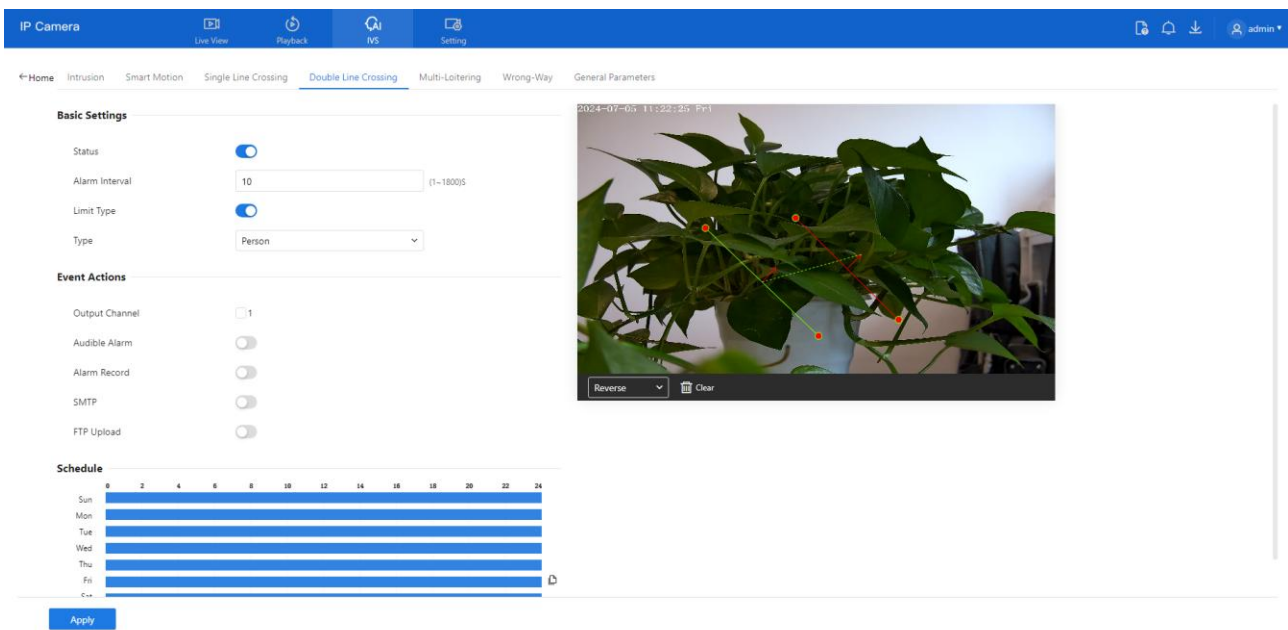

Step 2 Set all parameters of the double line crossing, please refer to 9.5.1 Step 3.
Define the deployment area.

- **Drawing lines:** Hold down the **left mouse button** and draw two lines in sequence. Release to generate two virtual fences labeled "1" and "2."
- **Setting direction:** Click on either fence (it will turn red when selected). Choose **Positive** or **Reverse** direction from the drop-down.
- **Editing lines:** Drag the endpoints to adjust the size or position. Right-click to delete a line, as shown in Figure 9-8.

Figure 9-8 Deployment area settings page



 NOTE

- ☐ The system recognizes a valid crossing only if **Virtual Fence 1** is crossed **before Virtual Fence 2**.
- ☐ Draw the fences toward the **center** of the screen to ensure the target is fully recognized before crossing.
- ☐ The fence **length must be sufficient** for reliable foot-based detection.
- ☐ Direction cannot be manually adjusted other than by selecting **Reverse**.

Step 3 Set the deployment time. Refer to Section 7.4 Step 4.

Step 4 Click **Apply**. A message saying "Apply success!" confirms that the settings have been saved.

9.5.5 Multi-Loitering


Description

Multi-loitering detection triggers an alarm when multiple targets (e.g., persons or vehicles) remain in a defined area longer than a specified minimum loitering time.

Procedure

Step 1 Navigate to **IVS > Intelligent Analysis > Multi-Loitering** to access the **Multi-Loitering** setting interface, as shown in Figure 9-9.

Figure 9-9 Multi-Loitering setting page

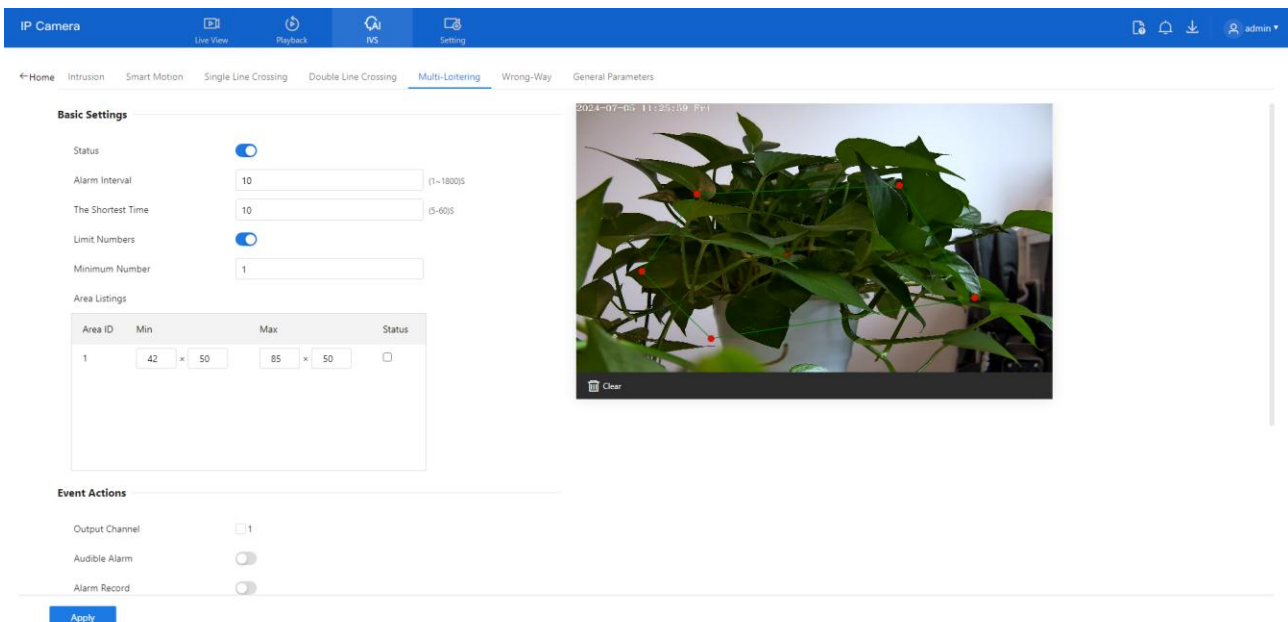

The screenshot displays the 'Multi-Loitering' configuration page. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. Below this, a breadcrumb trail shows 'Home' > 'Intrusion' > 'Smart Motion' > 'Single Line Crossing' > 'Double Line Crossing' > 'Multi-Loitering' > 'Wrong-Way' > 'General Parameters'. The 'Multi-Loitering' tab is active.

Basic Settings

- Status: ☒
- Alarm Interval: 10 (Range: 1~1800S)
- The Shortest Time: 10 (Range: 5~60S)
- Limit Numbers: ☒
- Minimum Number: 1

Area Listings

Area ID	Min	Max	Status
1	42 × 50	85 × 50	☐

Event Actions

- Output Channel: ☐ 1
- Audible Alarm: ☐
- Alarm Record: ☐

At the bottom right, there is a live video feed showing a potted plant with green leaves and red flowers. A 'Clear' button is located below the video feed. An 'Apply' button is at the bottom left of the settings area.

Step 2 Set all parameters of multi-loitering, please refer to 9.5.1 Step 3.

Step 3 Set a deployment area:

- Move the cursor and **click** to define points.
- Click again to add vertices and create a polygon.
- **Right-click** to complete the shape, as shown in Figure 9-10.

Figure 9-10 Deployment area settings page



 NOTE

- A Lines cannot cross each other.
- You may define up to 8-sided shapes.
- A maximum of 8 deployment areas is supported.

Step 4 Set the deployment time. Refer to section 7.4 Step 4.

Step 5 Click **Apply**. The he system will save the configuration and display "Apply success!"

9.5.6 Wrong-Way


Description

Wrong-Way monitors directional movement within a designated area. An alarm is triggered when a target (such as a person or vehicle) moves in the opposite direction of the configured travel path.

Procedure

Step 1 Navigate to **IVS > Intelligent Analysis > Wrong-Way** to access the Wrong-Way settings interface, as shown in Figure 9-11.

Figure 9-11 Wrong-Way settings page

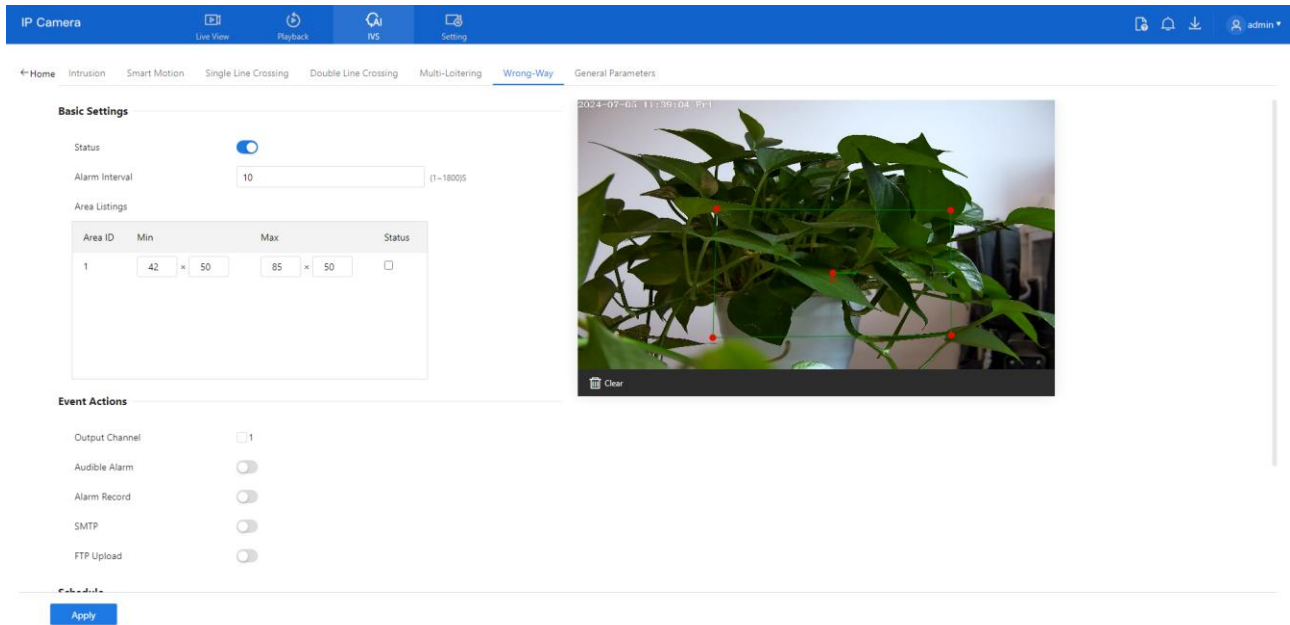

Step 2 Set all parameters of Wrong-Way, please refer to 9.5.1 Step 3.

Step 3 Define the deployment area.

- Move the cursor on the video interface and click to create a point.
- Continue clicking to form lines and enclose a custom shape.
- Right-click to finish the area drawing.
- Use the **arrow tool** within the field to define the reverse direction of travel, as shown in

Figure 9-12.

Figure 9-12 Deployment area setting interface



NOTE

- Lines **must not intersect**, or the drawing will fail.
- A **maximum of 8 sides per shape** and **up to 8 zones** are supported.

Step 4 Set deployment time, please refer to 7.4 Step 4.

Step 5 Click **Apply**. The system will save your settings and display the message "**Apply success!**".

9.6 Configure People Counting


9.6.1 Setting

People Counting allows the camera to count entries and exits across a defined line in the monitored area. This is useful for analyzing foot traffic.

Procedure

Step 1 Navigate to **IVS > Behavior Analysis > People Counting** to access the **People Counting** setting interface, as shown in Figure 9-13.

Figure 9-13 People counting page

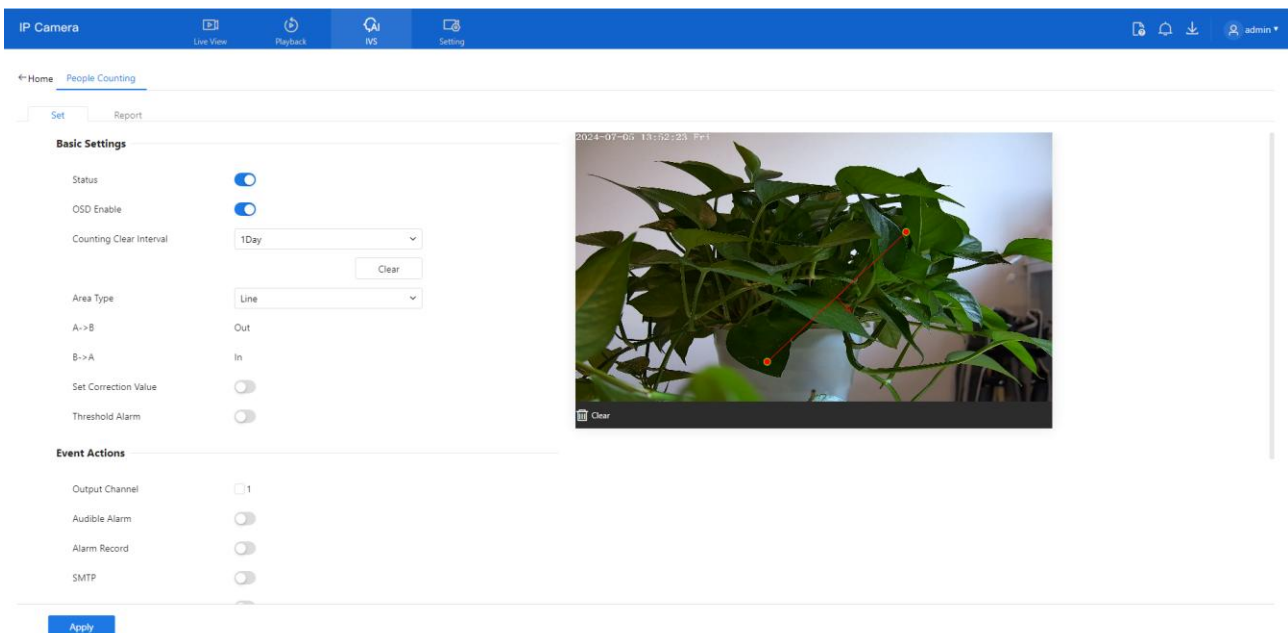

Step 2 Set all parameters of illegal parking. Table 9-3 describes the specific parameters.

Table 9-3 Parameters of people counting

Parameter	Description	Setting
Mode (only for PTZ camera)	Choose between Normal and Preset Point mode. Preset mode requires selecting a predefined point.	[How to set] Choose from the drop-down list [Default value] Normal mode
Enable	Enables the button to enable the alarm.	[How to set] Click the button on. [Default value] OFF

Parameter	Description	Setting
OSD Enable	Enable the OSD, the count data will show on live video screen.	[How to set] Click the button on. [Default value] OFF
Counting Clear Interval	Automatically resets the count at set intervals (e.g., 10 min, 1 hour, etc.). Manual reset also available via Clear Counting .	[How to set] Choose from drop-down list. [Default value] 12 hours
Area Type	Defines the counting method (e.g., line). Labels A and B indicate "In" and "Out."	[How to set] Choose from drop-down list. [Default value] Line
Set Correction Value	Enable, set the count correction value, it can be positive or negative. For example, if there are 30 people enter the area before counting, input 30 to correct. If 30 people go out the area, input -30.	[How to set] Enable /Input a value in the area box. [Default value] 0
Threshold alarm	Triggers an alarm if the count exceeds a defined threshold.	[How to set] Click the button on. [Default value] OFF
Output Channel	If you click to set the Output Channel and the device is connected to an external alarm indicator, the alarm indicator signals when an alarm is triggered. Only for Some Models.	[How to set] Click to select an ID.
Flashlight Alarm	After enabling Flashing Light and setting the Flashing Light Alarm Output, the light flashes when an alarm event is detected. Only for Some Models.	[How to set] Click the button on. [Default value] OFF

Parameter	Description	Setting
Audible Alarm	After enabling Audible Warning and setting Audible Alarm Output, the built-in speaker of the device or connected external speaker plays warning sounds when an alarm happens. (set at the “ Setting > Video / Audio > Audio File ”) Only for some models.	[How to set] Click the button on. [Default value] OFF
Alarm Record	Enable the button to enable the alarm record.	[How to set] Click to enable Alarm Record. [Default value] OFF
SMTP	Enable the button to enable SMTP sever. The parameters of SMTP can be set at Setting > Network > Advanced Settings > SMTP interface.	[How to set] Click to enable SMTP. [Default value] OFF
FTP Upload	Enable the button to enable File Transfer Protocol. The parameters of FTP can be set at Setting > Network > Advanced Settings > FTP interface.	[How to set] Click to enable FTP Upload. [Default value] OFF
White light Alarm	When the Day/Night mode is chosen Night mode, and the light is IR LED or NONE , this linkage action is valid. Enable to white light alarm when it triggers the alarm, the white light will be on. Only for Some Models.	[How to set] Click the button on. [Default value] OFF

Step 3 Set the deployment area:

- Click to generate points on the live video screen.
- Continue to form a line or shape.
- Right-click to finish drawing.


Step 4 Set the deployment time. Refer to section 7.4 Step 4.

Step 5 Click **Apply**. The system saves your configuration and confirms with "**Apply success!**".

9.6.2 Report

The People Counting interface allows you to view statistical data by setting specific query conditions, including a defined time range. The data can be visualized in three formats: Line Chart, Histogram, or List, as shown in Figure 9-14.

Figure 9-14 People counting page

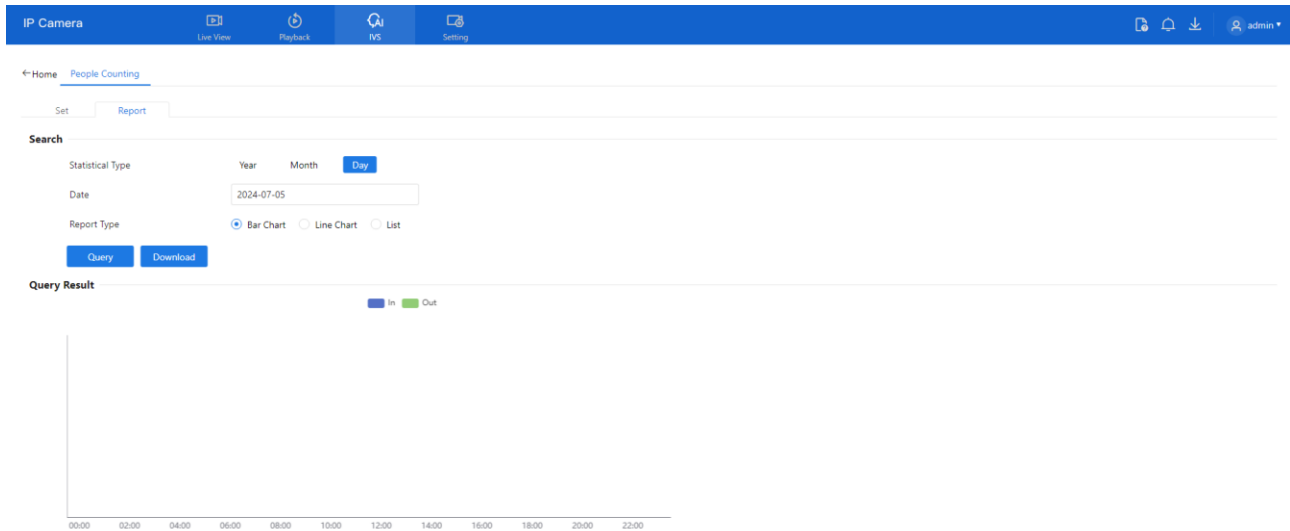

Procedure

Step 1 Set the Time Range:

- Use the calendar pop-up to select the **Start** and **End** time for the query.
- Select the **Year** and **Month** as needed.

Step 2 Choose Report Type:

- Available display formats include:
 - **Line Chart**
 - **Histogram**
 - **List**

Step 3 Query the Data:

- Click the **Query** button to retrieve the people counting results based on the specified conditions.

Step 4 Download Results:

- Click **Download** to export the query results. The data can be saved to a local folder for further analysis or reporting.

10.4 Configure PTZ

10.4.1 Control and Configure the PTZ (Only for Some Models)

Description


PTZ (Pan-Tilt-Zoom) functions are supported on high-speed network domes, PTZ cameras, or cameras connected to an external PTZ device. Motorized cameras also support focus and zoom actions. Please refer to the actual product for available features.

Controlling the PTZ

When browsing real-time videos of a dome camera or a camera connected to an external PTZ, you can control the PTZ to view videos in different directions.

Click **PTZ** below the **Live Video** page to open the **PTZ Control** page as shown in Figure 10-1, you can click the eight arrow keys to move the PTZ in eight directions. You can also zoom the lens and adjust the focal length.

Figure 10-1 PTZ control area

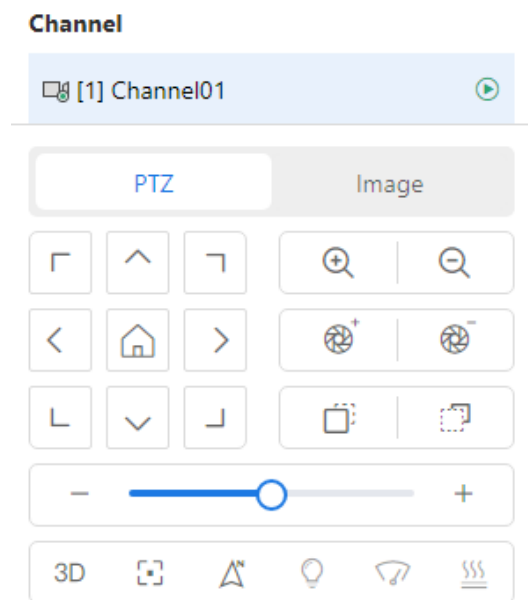

In the PTZ control area, you can perform the following operations:

- ☐ Slide the slider left or right beyond the PTZ rotation keys, you can adjust the PTZ rotation speed.
- ☐ Click the arrows to move the PTZ in eight directions.

- ☐ Click  to go home position.

- ☐ Click  to adjust the focal length.

- ☐ Click  to adjust the aperture.

- ☐ Click  to focus.

Click  to set north direction. You can define any direction as due north as the reference point of the PTZ rotation.

Click  to operate the lens directly, zoom +/- the area, or move the focus point. The 3D positioning function quickly rotates the PTZ and changes the focal length in specific scenarios. You can also change the focus by drawing rectangle frames.

□

Click  to enable automatic focus.

You can set light On/Off, brush function and reboot action in extension page. There are heating and defogging applicable for some special cameras.

Click  to enable the light. Light On/Off is used to control the infrared camera shields on and off.

Click  to enable brush. Brush is used to clean the lens.

Click  to start heat lens to defog, click again to end.


NOTE

- **Brush** is available only to a camera with a brush or a camera shield.
- **Light On/Off** is available only to specific camera shields.

10.4.2 Configure the PTZ

It is available for the cameras with PTZ or connected to PTZ. **PTZ Configure** interface is as shown in Figure 10-2.

Figure 10-2 PTZ configure area

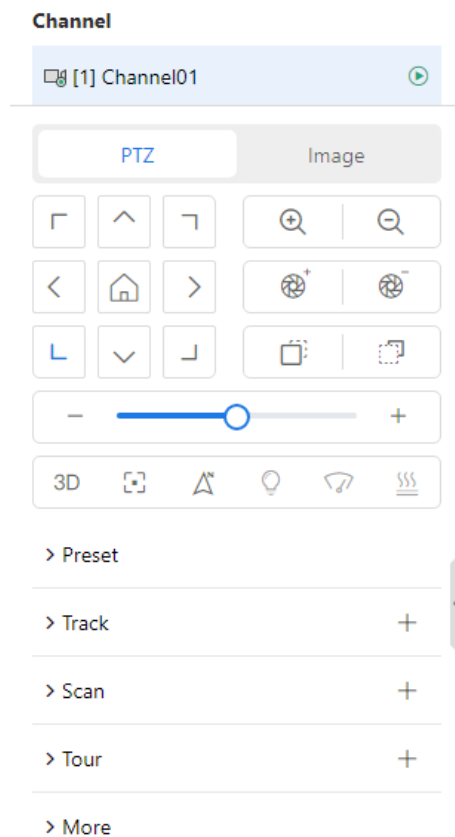

In the PTZ configure area, you can perform the following operations:

- ☐ Add, delete, and invoke preset positions.
- ☐ Add, delete, and invoke tracks.
- ☐ Add, delete, and invoke scans.
- ☐ Add, delete, and invoke tours.
- ☐ Set the home.
- ☐ Set the idle.
- ☐ Set the timer.
- ☐ Set the extension. Set Light On/Off and Brush function.

Brush is used to clean the lens. Light On/Off is used to control the infrared camera shields on and off.

 NOTE

Brush is available only for a camera with a brush or a camera shield.


Light On/Off is available only for specific camera shields.


10.4.3 Configure and Invoke Home / Preset Positions

You can configure preset positions and quickly rotate the camera to a preset position by invoking the preset position.

Choose setting > PTZ > Preset. You can set preset and home position at preset interface

Figure 10-3 Preset interface

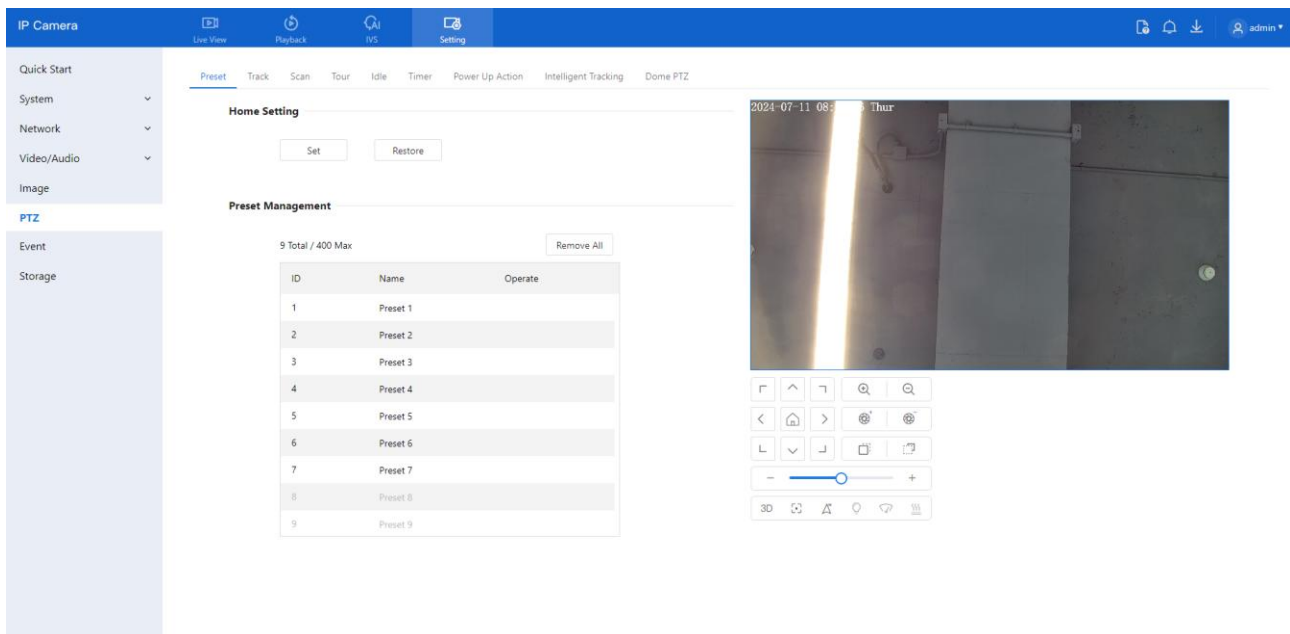

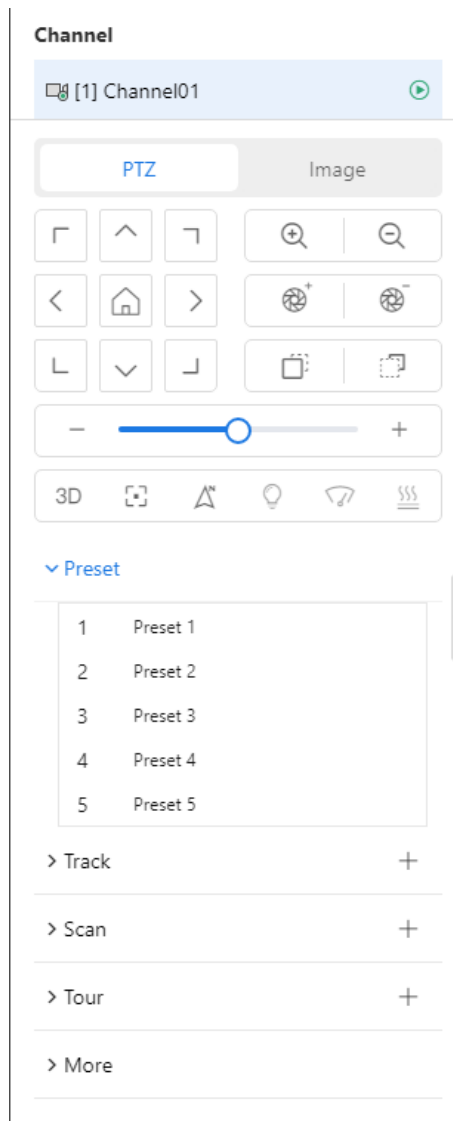

You can set any point as Home and the default Home is the 0.00/90.0/1X coordinate. Click  to go home position directly.

Step 1 Click **Home**.

The Home setting page is displayed as shown in Figure 10-4.

Figure 10-4 Home configuration



Step 2 Adjust the PTZ keyboard to operate the lens.

Step 3 Click **Set** to set home. Click **Restore** to restore the default home.

Step 4 Click  invoke home.

Step 1 Configure a preset position.

1. Choose the preset ID.
2. Adjust the direction of PTZ to finish the preset position setting.
3. Click  to save, click to rename.
4. Click  to delete the current preset.

Step 2 Invoke a preset position.

Select a preset position from the **Preset** list to invoke the preset position. Click  icon to invoke.

NOTE

The special presets:

- Set No.64 preset, the PTZ functions restore to factory settings .
- Invoke No.92 preset, set the start point of scan.
- Invoke No.93 preset, set the end point of scan.
- Invoke No.97 preset, it will invoke the SCAN 1.
- Set No.97 preset, view the version of MCU and chip.
- Invoke No.99 preset, scan by rotating 360°.
- Invoke No.250 preset, enable the MCU temperature.
- Invoke No.251 preset, disable the MCU temperature.
- Set No.252 preset, the PTZ parameters will be restore to factory settings.
- Invoke 103 preset, the brush works once, this function is only for PTZ cameras with brush.


10.4.4 Configure and Invoke Tracks


You can record a track to allow the camera to repeatedly rotate based on the preset track.

Step 1 Configure a track.

1. Set the track ID and name.
2. Click **Start** to set the starting position of the track.
3. Use arrow keys in the **PTZ Control** area to set a required a track.
4. Click **End** to finish the track setting.

Figure 10-5 Track configuration

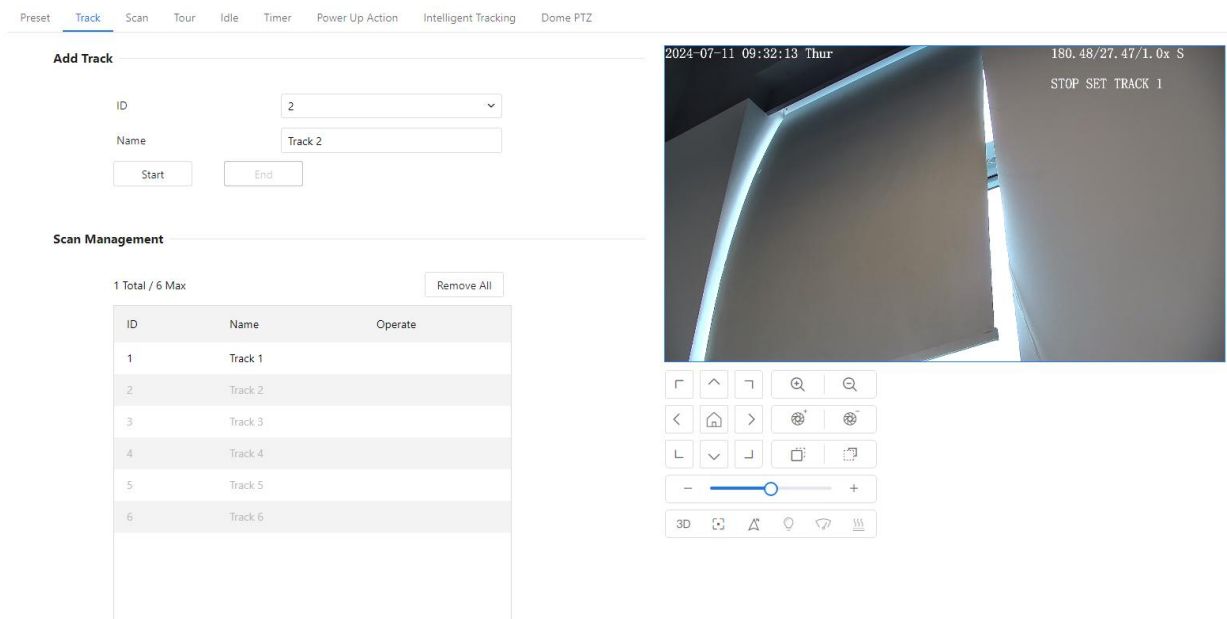

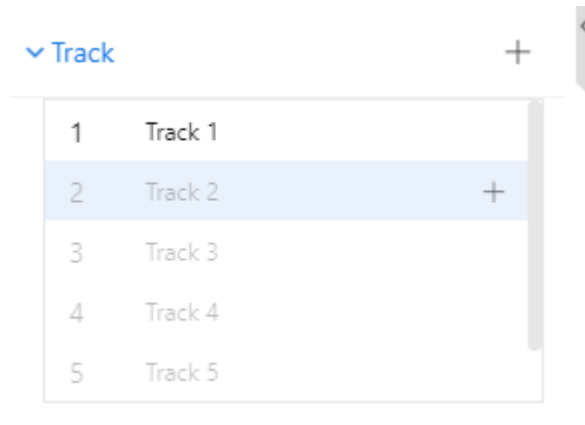

Step 2 Invoke a track.

Select a track name from the **Track** list, click  to invoke the track.

Click  to delete the current track. Or click Remove All to delete all track.

 NOTE

A maximum of six tracks can be configured.

10.4.5 Configure and Invoke Scans


You can configure a starting point and end point to allow the camera to repeatedly rotate from the starting point to end point.


Step 1 Configure a scan.

1. Click **Scan**.

The **Scan Add** page is displayed as shown in Figure 10-6.

Figure 10-6 Scan configuration

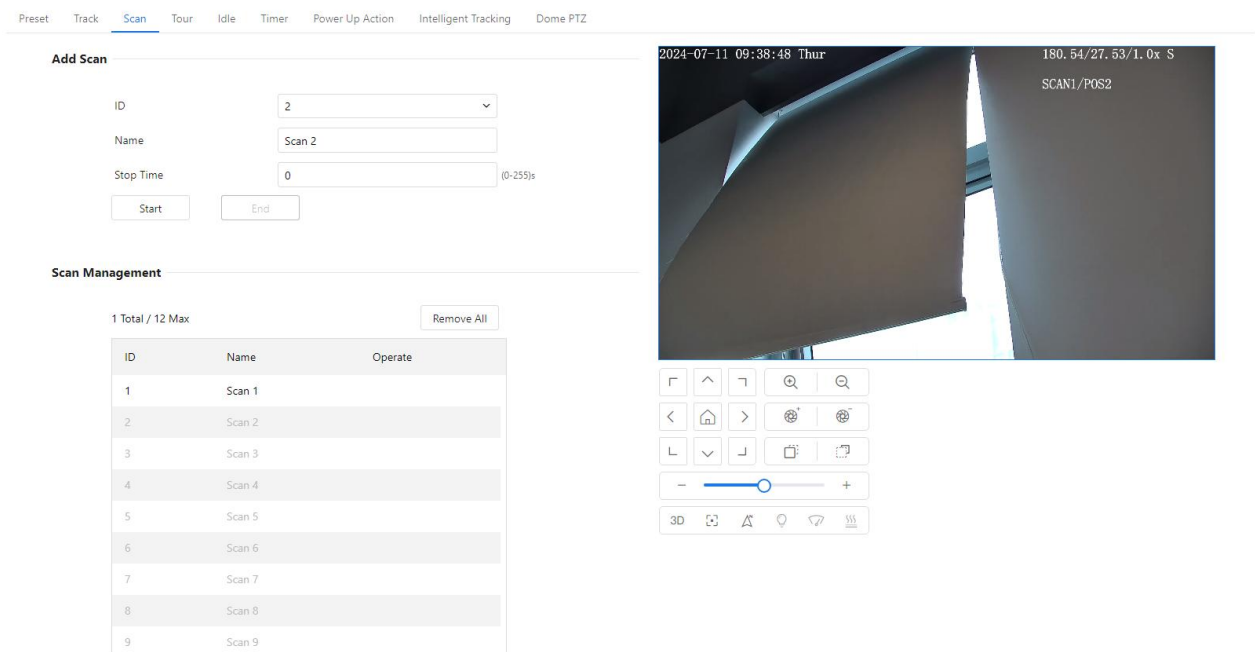

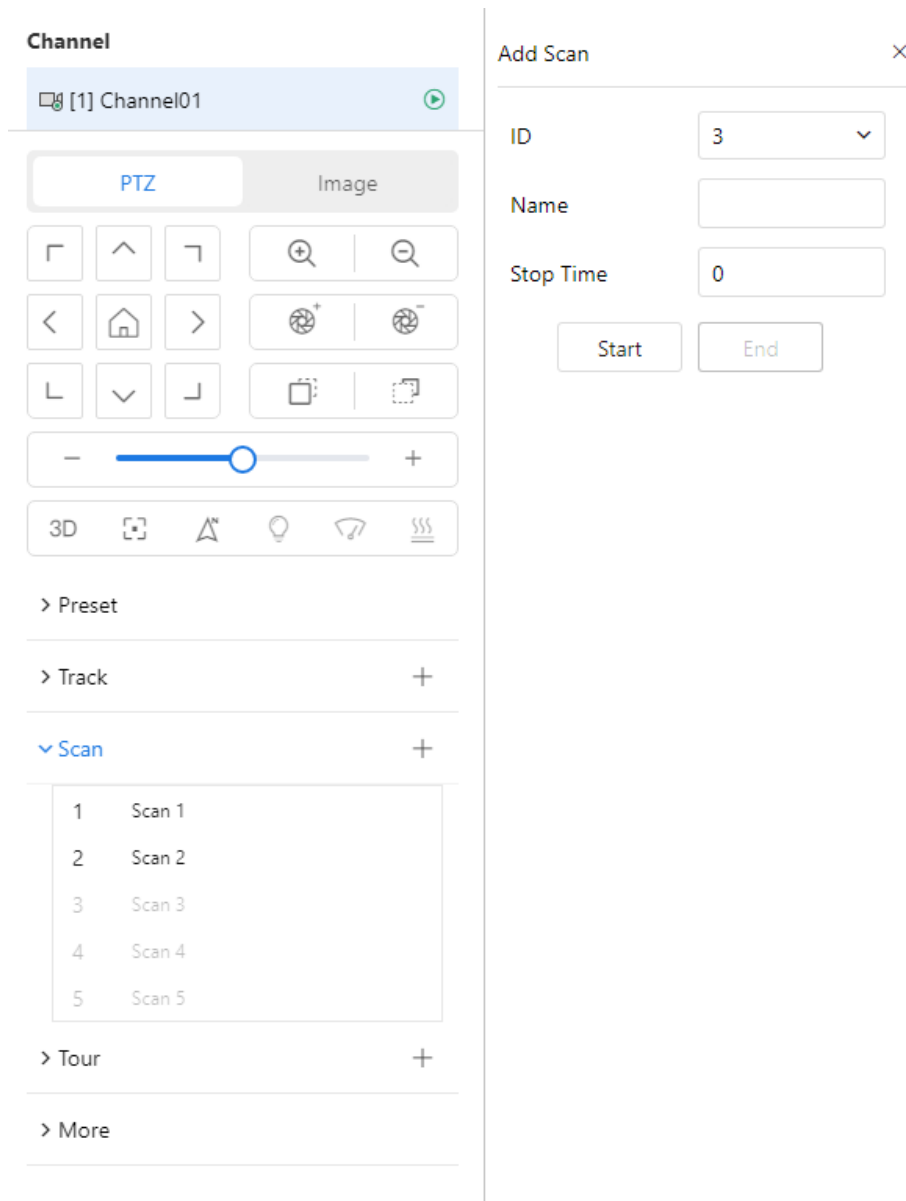

2. Set the scan ID and name.
3. Click **Start** to start setting.
4. Use arrow keys in the **PTZ Control** area to set a start point and an end point.
5. Click **End** to finish the scan setting.

Step 2 Invoke a scan.

Select a scan value from the **Scan** list box, click  to invoke the scan.

Click  to delete the current scan.

NOTE

A maximum of twelve scans can be configured.

10.4.6 Configure and Invoke Tours

You can configure a tour to allow the camera to repeatedly rotate based the tours. Each tour includes presets and wait time should be set.

Step 1 Configure a tour.

1. Click **Tour**.

The **Tour Add** page is displayed as shown in Figure 10-7.

Figure 10-7 Tour configuration

Preset

Track

Scan

Tour

Idle

Timer

Power Up Action

Intelligent Tracking

Dome PTZ

Add Tour

ID

1

▼

Name

+

-

↑

↓

ID	Preset	Time(S)
1	Preset 2 ▼	5
2	Preset 3 ▼	5

Save

Tour Management

0 Total / 12 Max

Remove All

ID	Name	Operate
1	Tour 1	
2	Tour 2	
3	Tour 3	
4	Tour 4	
5	Tour 5	
6	Tour 6	

2024-07-11 11:58:37 Thur

⏏

⬆

⬇

🔍

🔍

⏪

🏠

⏩

⚙

⚙

⏴

⏵

⏶

⏷

⏸

-

+

3D

🔄

🔍


💡

🌫

🌡

Issue V1.0 (2025-05-28)

137

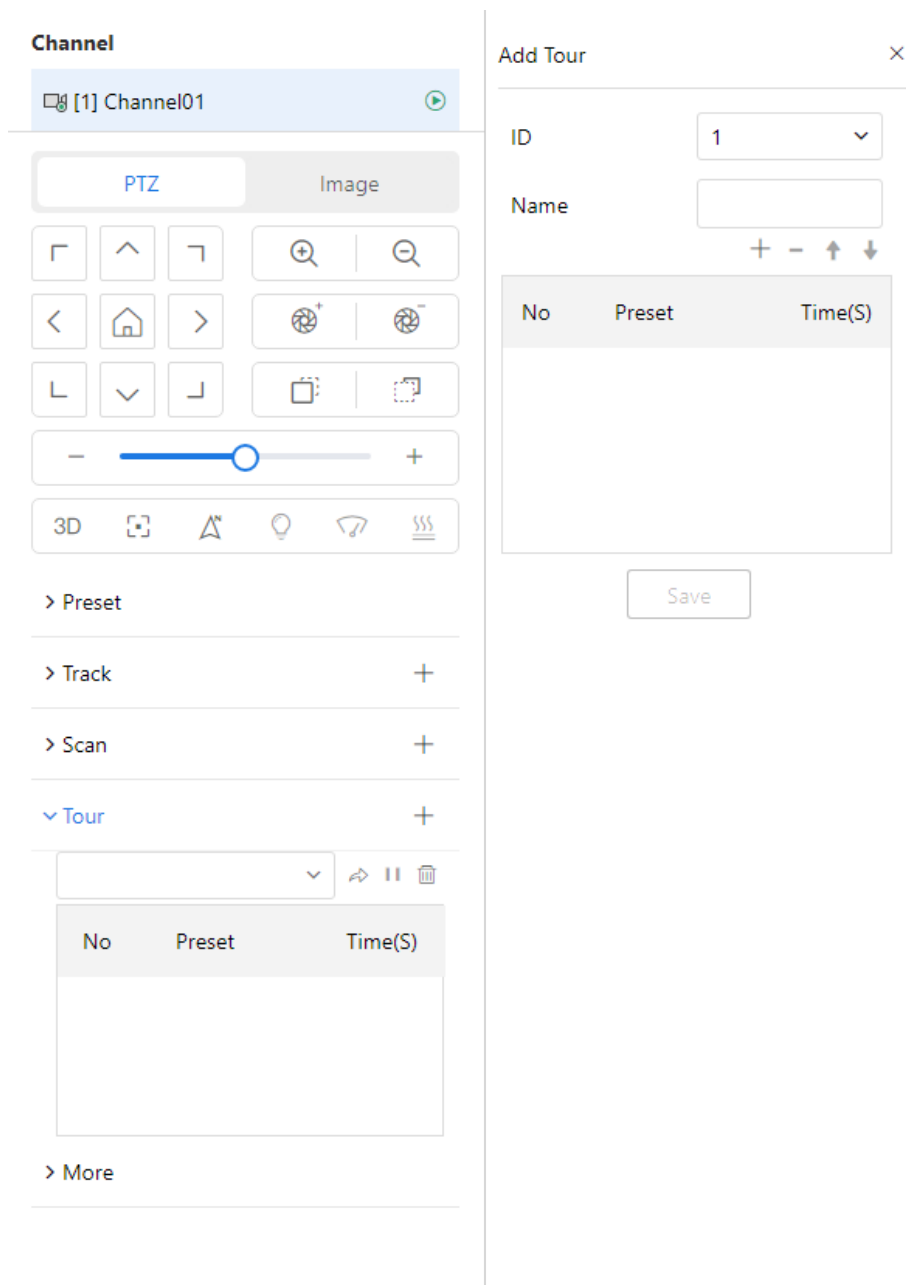

2. Set the tour ID and name.
3. Click + to start add preset to tour.
4. Select a preset and set the wait time.
5. Continue to select a preset and set the wait time.
6. Click **Save** to finish the tour setting.

Step 2 Invoke a tour.

Select a tour value from the **tour** list box, click  to invoke the tour. Click  to delete the current tour.

 NOTE

A maximum of twelve tours can be configured.

10.4.7 Configure Idles

You can enable idle to allow the camera to run the preset, track, scan and tour automatically after the waiting time (1 minute ~ 240 minutes).

Step 1 Choose **Idle**.

The **Idle Add** page is displayed as shown in Figure 10-8.

Figure 10-8 Idle configuration

The screenshot shows the 'Idle' configuration page. At the top, there is a horizontal menu with tabs: Preset, Track, Scan, Tour, Idle (selected), Timer, Power Up Action, Intelligent Tracking, and Dome PTZ. Below the menu, there are four configuration items: 'Status' with a toggle switch turned on, 'Type' with a dropdown menu, 'Name' with a dropdown menu, and 'Time' with a text input field containing '0' and a label '(1~240)min'. At the bottom of the form is a blue 'Apply' button.

Step 2 Enable the Idle button.

Step 3 Set the idle type and name from list.

Step 4 Set the wait time(1 min ~240 min).

Step 5 Click **Apply** to save the idle setting.

10.4.8 Configure Timer

You can set the PTZ timer to allow the camera to invoke the preset, track, scan and tour automatically in the setting time and the camera will restore to the operation and location after the end time.

Step 1 Choose **Timer**.

The **Set the PTZ Timer** page is displayed and enable the timer, the **Timer** page is displayed as shown in Figure 10-9.

Figure 10-9 Timer configuration

Preset Track Scan Tour Idle **Timer** Power Up Action Intelligent Tracking Dome PTZ

Status ☒

Timer Mode

Time List

ID	Begin/End Time	PTZ Type	Name	Operate
1	00:00 ~ 00:00			
2	00:00 ~ 00:00			
3	00:00 ~ 00:00			
4	00:00 ~ 00:00			
5	00:00 ~ 00:00			
6	00:00 ~ 00:00			
7	00:00 ~ 00:00			
8	00:00 ~ 00:00			

Step 2 Set the Timer Mode. Timer mode includes Everyday and Once. You should set the time when once mode is selected.

Step 3 Choose Once, click Time to choose day from the pop-up calendar.

Step 4 Set Timers.

Select the begin time, end time, PTZ type and name from the drop-down list box.

 NOTE

A maximum of eight timers can be configured.

Click Clear to delete the setting.

Step 5 Click **Apply** to save the timer setting.

10.4.9 Configure Power UP Action

This function allows the camera to automatically execute a specified PTZ operation upon reboot (e.g., after a power loss or restart).

- Click the reboot action button to enable reboot action.
- Set the PTZ Type and name from the drop-down list box.
- Click Apply to finish the reboot setting.

Figure 10-10 Power up action

Preset Track Scan Tour Idle Timer **Power Up Action** Intelligent Tracking Dome PTZ

Status ☒

Type

Name

Apply

10.4.10 Configure Intelligent Tracking

The intelligent tracking is only for PTZ cameras.

Applicable Models

This function is available only for PTZ (Pan-Tilt-Zoom) cameras, specifically high-speed dome models.

Description

The Intelligent Tracking feature enables the PTZ camera to automatically follow moving objects within its field of view using advanced image processing algorithms. It detects and analyzes target characteristics—such as position, shape, contour, and color—and continuously tracks the target by comparing each video frame.

The system uses real-time analysis to determine the target's movement path and controls the camera's gimbal to follow the object dynamically. As the target moves, the camera automatically adjusts the zoom and focus based on the target's distance.

Once the moving object leaves the scene, the camera will return to its predefined preset position.

Function Highlights

- Automatically tracks human or object motion within a scene.
- Dynamically adjusts PTZ zoom and focus to maintain visual clarity.
- Returns to the preset position when no target is detected.

Note: This feature is optimized for surveillance applications requiring continuous tracking and target engagement, such as perimeter security or event monitoring.

Procedure

Step 1 Navigate to **Setting > PTZ > Intelligent Tracking** to access the Intelligent Tracking setting interface. Enable the intelligent tracking function, as shown in Figure 10-11.

Figure 10-11 Intelligent tracking page

The screenshot shows the 'Intelligent Tracking' configuration page. At the top, there are navigation tabs: Preset, Track, Scan, Tour, Idle, Timer, Power Up Action, **Intelligent Tracking**, and Dome PTZ. The 'Intelligent Tracking' section contains a toggle switch labeled 'Intelligent Tracking' which is currently turned on. Below this are three sliders: 'Calibration Coefficient' with a value of 1, 'Trace Magnify' with a value of 1, and 'Time Of Duration(sec.)' with a value of 120. There are also two dropdown menus: 'Start Point' and 'Tracking Type' (set to 'Person'). An 'Apply' button is located at the bottom of the configuration area.

Step 2 Set all parameters for intelligent tracking. Table 10-1 describes the specific parameters.

Table 10-1 Parameters of intelligent tracking

Parameter	Description	Setting
Intelligent Tracking	Click the button on to enable the intelligent tracking	[How to set] Click the button on. [Default value] OFF
Calibration Coefficient	It is equivalent to a control coefficient, and real-time tracking doubling rate nonlinear positive correlation; Usually the higher the installation height, the greater the calibration coefficient value; it ranges from 1 to 30.	[Setting method] Drag the slider. [Default value] 1
Trace Magnify	It is the value of lens zoom, which has a large influence on the real-time tracking magnification; it ranges from 0 to 30.	[Setting method] Drag the slider. [Default value] 7
Time of Duration (sec.)	The maximum time of a tracking period ranges from 0 to 300 s.	[Setting method] Drag the slider. [Default value] 120
Start Point	Start point of the tracking, you can choose the preset or none. The preset should be set in advanced.	[Setting method] Choose from drop-down list. [Default value] None

Tracking Type	Choose the tracking type, person or car.	[Setting method] Choose from drop-down list. [Default value] Person
---------------	--	---

Step 3 Click **Apply**. The message "Apply success!" is displayed, and the system will save the settings.

10.4.11 Dome PTZ

Description

The high speed dome cameras are connected to 485 keyboards, users can use the keyboard to control the cameras' PTZ menu.

Procedure

Step 1 Navigate to **Setting > PTZ > Dome PTZ**.

The **Dome PTZ** page is displayed, as shown in Figure 10-12.

Figure 10-12 Dome PTZ page

Step 2 Input the PTZ address, the default is 1.

Step 3 Click **Apply**.

The message "Apply success!" is displayed, and the system will save the settings.

10.5 Configure PTZ Keyboard

Description

When the IP camera is connected to an external PTZ by RS485 port, you can set external PTZ parameters, such as **PTZ Protocol**, **PTZ Address**, **Baud Rate**, and **Data Bits**.



CAUTION

This function is available only for a camera connected to an external PTZ. The PTZ address must be set to the address of the external PTZ; otherwise, the external PTZ cannot be used.

Procedure

Step 1 Navigate to **Setting > System > Settings > PTZ Keyboard**.
The **PTZ** page is displayed, as shown in Figure 10-13.

Figure 10-13 PTZ page

Step 2 Set the parameters according to Table 10-2.

Table 10-2 Parameters of PTZ Keyboard

Parameter	Description	Setting
PTZ	Enable this function if the device connects to an external PTZ. NOTE This check box is dimmed for an IP dome camera.	[Setting method] Click the button on to enable PTZ configuration.
PTZ Protocol	Protocol used by the external PTZ, such as PELCO_D and PELCO_P.	[Setting method] Select a value from the drop-down list box. NOTE When external PTZ parameters are configured, these parameters must match the settings on the
PTZ Address	Address of the external PTZ.	
Serial Port	The default value is COM1 .	
Baud Rate	Baud rate used by the external PTZ. The value ranges from 300 bit/s to 115200 bit/s. The default value is 4800 bit/s.	

Parameter	Description	Setting
Data Bits	The value must match the setting used by the external PTZ. It can be set to a value ranging from 4 to 8. Generally, the value is 8.	external PTZ.
Stop Bits	N/A	
Parity Verification	N/A	

Step 3 Click **Apply**. The message "Apply success!" is displayed, and the system will save the settings.

10.6 Smoke and Flame Detection

Description

The Smoke and Flame Detection feature enables the camera to monitor designated areas for signs of smoke or fire. When smoke or flame is detected within the defined detection zone, the system automatically generates an alarm to alert the user..

Procedure

Step 1 Navigate to **IVS > Advanced Intelligent Analysis >> Smoke and Flame Detection** to access the Smoke and Flame Detection interface, as shown in Figure 10-14.

Figure 10-14 Smoke and flame detection page

Smoke and Flame Detection

Basic Settings

Mode: Normal Mode

Status: ☐

Alarm Interval: 10 (1~1800)S

Sensitivity: 5

Event Actions

Output Channel: ☐ 1 ☐ 2

Audible Alarm: ☐

Alarm Record: ☐

SMTP: ☐

FTP Upload: ☐

White Light Alarm: ☐

Schedule

0 2 4 6 8 10 12 14 16 18 20 22 24

Sun ☒

Mon ☒

Tue ☒

Wed ☒

Thu ☒

Fri ☒

Sat ☒

Select All Clear All

2024-08-16 01:17:05 Fri

Clear

Apply

Step 2 Set all parameters for smoke and flame detection, please refer to 9.5.1 Step 3.

Step 3 Set a deployment area. Move the cursor to the drawing interface and click to generate a point, move the cursor to draw a line, and then click to generate another point. This is how a line is generated. In this way, continue to draw lines to form any shape, and right-click to finish line drawing.

NOTE

- A drawn line cannot cross another one, or the line drawing fails.
- Any shape with 32 sides at most can be drawn.
- The quantity of deployment areas is up to 8.

Step 4 Set deployment time, please refer to 7.4 Step 4.

Step 5 Click **Apply**. The message "Apply success!" is displayed, and the system will save the settings.

NOTE

For dual-lens, multi channels, panoramic cameras, the all IVS actions should choose one channel to set. The alarm information can linkage to other channels, users select on demand.

Figure 10-15 Choose channel

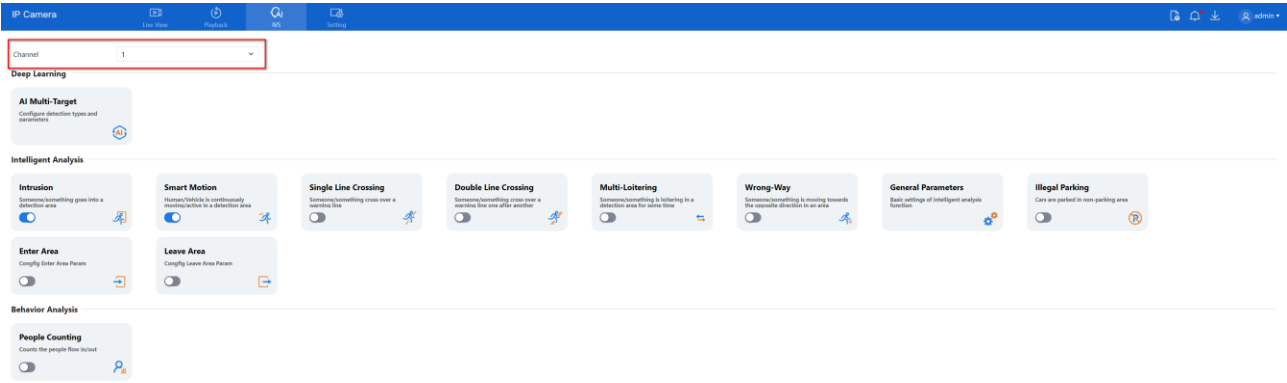


Figure 10-16 Linkage channels

Event Actions

Output Channel	☐ 1 ☐ 2
Audible Alarm	☒
Audible Alarm File	Dangerous area. Keep away.wav
Alarm Record	☒
Linkage Channel	☒ 1 ☐ 2 ☐ 3 ☐ 4
SMTP	☒
Linkage Channel	☒ 1 ☐ 2 ☐ 3 ☐ 4
FTP Upload	☒
Linkage Channel	☒ 1 ☐ 2 ☐ 3 ☐ 4

11 Panoramic Cameras

11.4 CVBS Function (Only for Some Models)

Preparation

Ensure a display device is connected to the camera's **VIDEO OUT** port.

Description


When the analog output function is enabled, the IP camera can transmit analog video signals to a video server or display device via the VIDEO OUT port. This is useful for legacy analog systems or real-time local display.

Procedure

Step 1 Navigate to **Setting > Image > CVBS**.

The **BNC Video Output** page is displayed, as shown in Figure 11-1.

Figure 11-1 BNC video output page

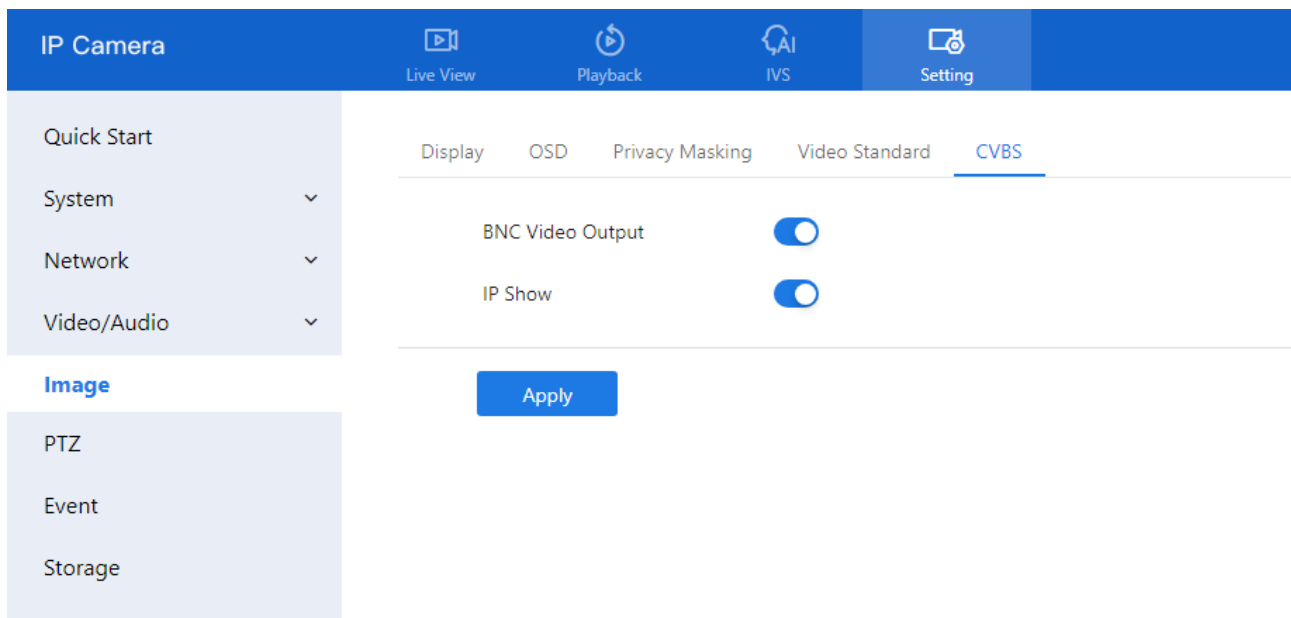

Step 2 Toggle the switch **ON** to enable **BNC Video Output**.

Step 3 Toggle the switch **ON** to enable **BNC Video Output**.

Step 4 Toggle the switch **ON** to enable **IP Show** if you want the IP address displayed on the video output.

Step 5 Click **Apply**.

A message will appear: "Apply success!", indicating the settings have been saved.

Note: This function is only supported on specific camera models with analog output capabilities.

11.5 Fisheye Camera

Procedure

Step 1 Navigate to **Setting > Image > Fisheye**.

The Fisheye page is displayed, as shown in Figure 11-2.

Figure 11-2 Fisheye page

The screenshot shows the 'Fisheye' configuration page in the D-Link IP Camera web interface. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar lists 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The 'Image' section is expanded, showing 'Display', 'OSD', 'Privacy Masking', 'Video Standard', and 'Fish Eye' tabs. The 'Fish Eye' tab is active, displaying settings for 'Video' (One-Channel), 'Mounting Mode' (Wall), and 'Display Mode' (Fish Eye). A red warning message states: 'When the Fisheye Device Switches to Non Fisheye Mode, The Intelligent Function Cannot be Used.' An 'Apply' button is located at the bottom of the settings area.

Step 2 Select the **Video Mode**:

- **One Channel:** For 4PTZ fisheye models, displays a quad view in real-time.
- **Multi-Channels:** For 4PTZ fisheye models, displays a single dewarped view in real-time.

Note: Switching video modes will reboot the device automatically.

Step 3 Select the **Mounting Mode** based on your installation:

- **Wall**
- **Ceiling**
- **Desktop**

Step 4 Choose the **Display Mode** from the drop-down list:

- **Fisheye:** Original 360° panoramic view; this is the only mode that supports intelligent analysis.
- **Double Panorama:** Dual 180° panoramic views.
- **4PTZ:** Quad-view dewarped image layout.
- **Single Panorama:** Single 180° panoramic view.
- **Fisheye+3PTZ:** Combined 360° view with three dewarped PTZ views.

Multi-channel fisheye types only support 4PTZ and Fisheye+3PTZ display modes.

Step 5 Click **Apply**.

A message will appear stating "Apply success!", confirming that the settings have been saved.

Note: When switching from Fisheye mode to any non-fisheye mode, intelligent functions will be disabled.

11.6 Dual-Lens

11.6.1 Dual-Lens

For cameras equipped with dual lenses, you can configure the video output mode from **Setting > Image > Dual-Lens**, as shown in Figure 11-3.

Figure 11-3 Dual-Lens

The figure displays two screenshots of the 'Dual-Lens' configuration page in the IP Camera web interface. The top screenshot shows the 'Multi Channels' mode selected in the 'Video Mode' dropdown. The bottom screenshot shows the 'Stitching Mode' selected, with an additional 'Stitching Distance' field set to '2' (range 2-200M). Both screenshots show the navigation menu on the left with 'Image' expanded, and the top bar with 'Setting' selected.

Top Screenshot (Multi Channels):

- Top Bar: IP Camera, Live View, Playback, IVS, **Setting**
- Left Menu: Quick Start, System, Network, Video/Audio, **Image**, Event, Storage
- Tabs: Display, OSD, Privacy Masking, Video Standard, **Dual-Lens**
- Video Mode: Multi Channels
- Apply button

Bottom Screenshot (Stitching Mode):

- Top Bar: IP Camera, Live View, Playback, IVS, **Setting**
- Left Menu: Quick Start, System, Network, Video/Audio, **Image**, Event, Storage
- Tabs: Display, OSD, Privacy Masking, Video Standard, **Dual-Lens**
- Video Mode: Stitching Mode
- Stitching Distance: 2 (2-200M)
- Apply button

Available Video Modes:

- **Multi-Channels**
 - Each lens operates independently.
 - Two separate video streams are displayed — each corresponding to a different channel.
- **Stitching Mode**
 - Combines video from both lenses into one seamless panoramic view.

- You can set the **Stitching Distance** (range: 2–200 meters) to achieve smooth, natural blending based on the physical installation environment.

 NOTE

Important:

Switching between video modes will **reset all IVS (Intelligent Video Surveillance) settings**. Make sure to back up your configuration if necessary before changing the mode.

11.7 Panoramic Camera


11.7.1 RS485

Purpose:

Configure the RS485 interface to connect the panoramic camera with an external high-speed PTZ camera.

Step 1 Go to **Setting > System > Settings > RS485**

The RS485 configuration interface is shown in Figure 11-4.

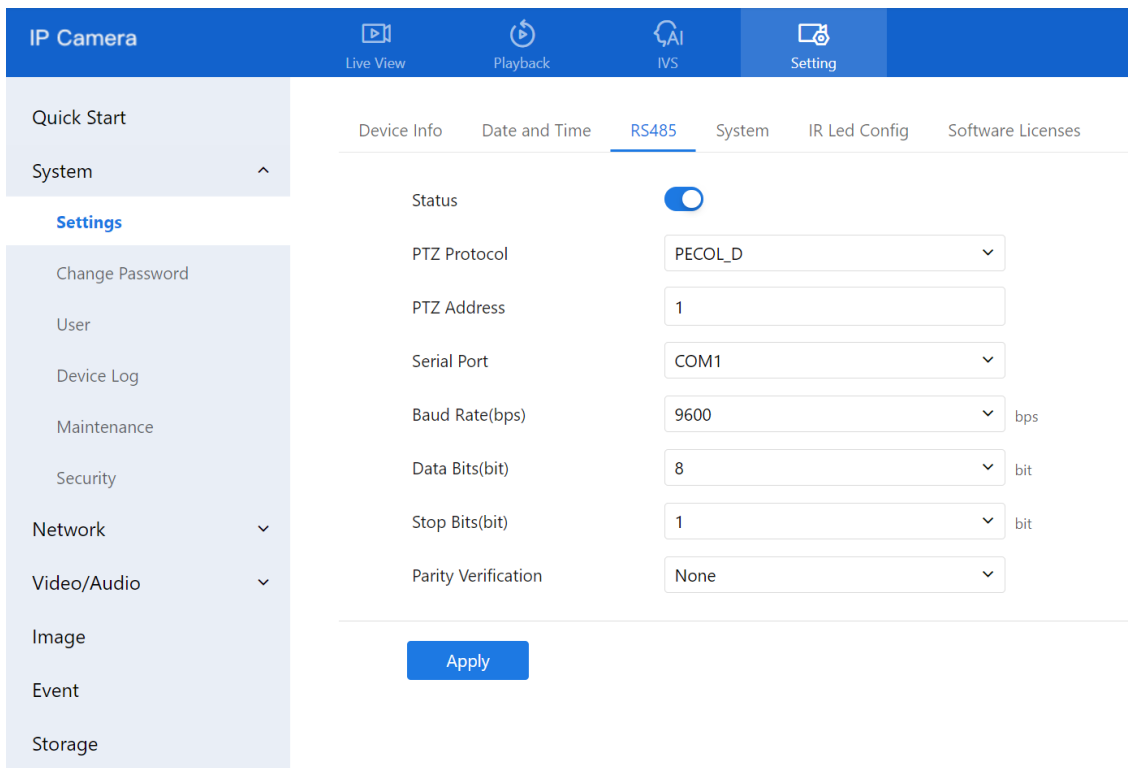

The screenshot shows the 'IP Camera' web interface. The top navigation bar includes 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar has a 'Quick Start' section and a 'System' section with a dropdown arrow. Under 'System', there is a 'Settings' link. The main content area has tabs for 'Device Info', 'Date and Time', 'RS485' (selected), 'System', 'IR Led Config', and 'Software Licenses'. The 'RS485' tab displays the following configuration options:

Parameter	Value
Status	☒
PTZ Protocol	PECOL_D
PTZ Address	1
Serial Port	COM1
Baud Rate(bps)	9600
Data Bits(bit)	8
Stop Bits(bit)	1
Parity Verification	None

At the bottom of the configuration area is an 'Apply' button.

Parameter	Description	Setting
Status	Enable this function if the device connects to high-speed camera. NOTE This check box is dimmed for an IP dome camera.	[Setting method] Click the button on to enable PTZ configuration.

Parameter	Description	Setting
PTZ Protocol	Protocol used by the external PTZ, such as PELCO_D and PELCO_P.	[Setting method] Select a value from the drop-down list box. NOTE When parameters are configured, these parameters must match the settings on high-speed camera.
PTZ Address	Address of the high-speed camera.	
Serial Port	The default value is COM1 .	
Baud Rate	Baud rate used by the external PTZ. The value ranges from 300 bit/s to 115200 bit/s. The default value is 4800 bit/s.	
Data Bits	The value must match the setting used by the external PTZ. It can be set to a value ranging from 4 to 8. Generally, the value is 8.	
Stop Bits	N/A	
Parity Verification	N/A	

Step 2 Click **Apply**. The message "Apply success!" is displayed, the system will save the settings.


11.7.1 IR Led Config

Purpose:

Configure the infrared (IR) LEDs for panoramic cameras to ensure proper night vision functionality based on camera orientation.

Step 1 Go to **Setting > System > Settings > IR Led Config**. The IR LED configuration interface is shown in Figure 11-4.

Figure 11-4 IR led config

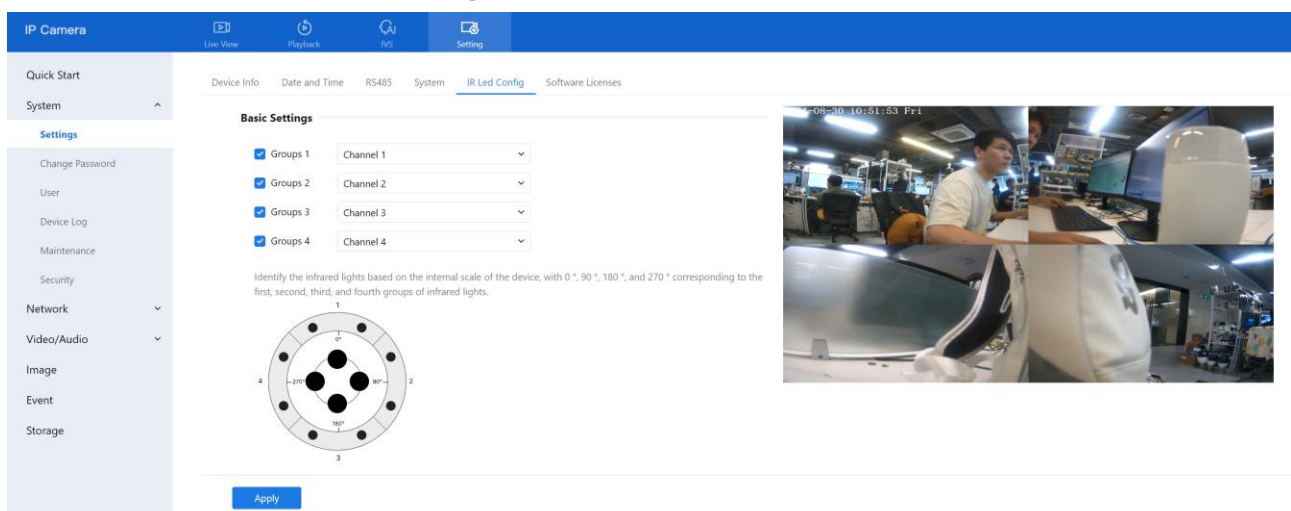

Procedure:

Step 2 **Channel Assignment:**

Each IR LED group corresponds to a direction on the internal camera dial:

- **Group 1** = 0°
- **Group 2** = 90°
- **Group 3** = 180°
- **Group 4** = 270°

Assign channels based on the installation direction, as marked on the device housing.

Step 3 **Adjust as Needed:**

If the camera is physically moved or rotated, update the channel assignments so the IR LEDs align with the actual field of view.

Step 4 Click **Apply**.

When the message "**Apply success!**" appears, the settings are saved.

Note: Correct LED-to-channel alignment is critical for effective illumination.

11.7.2 CVBS

Purpose: Enable analog video display through a BNC cable.

Step 1 Go to **Setting > Image > CVBS**. The **CVBS configuration interface** is shown in **Figure 11-5**.

Figure 11-5 CVBS

The screenshot shows the 'CVBS' configuration page within the 'IP Camera' web interface. The top navigation bar includes 'Live View', 'Playback', 'IVS', and 'Setting'. The left sidebar lists 'Quick Start', 'System', 'Network', 'Video/Audio', 'Image', 'Event', and 'Storage'. The 'Image' section is expanded, showing 'Event' and 'Storage'. The main content area has tabs for 'Display', 'OSD', 'Privacy Masking', 'Video Standard', and 'CVBS'. The 'CVBS' tab is active. It features a 'Channel' dropdown menu set to '1', a 'BNC Video Output' toggle switch turned on, and an 'IP Show' toggle switch turned on. An 'Apply' button is at the bottom.

Channel
1

Setting	Value
BNC Video Output	On
IP Show	On

Apply

- Step 2 Enable **BNC Video Output** to activate analog signal output.
- Step 3 Enable **IP Show** to display the IP address on the analog output screen.
- Step 4 Use the **dipswitch** on the device to switch video channels if needed.

11.8 For Special Cameras

11.8.1 General Parameters

Description

Target filtering helps reduce false alarms by ignoring brief or unstable appearances of people or vehicles in the detection area. Only stable, continuous targets will trigger intelligent analysis alarms.

Procedure

- Step 1 Go to **IVS > Intelligent Analysis > General Parameters** to access the advanced setting interface, as shown in Figure 11-6.

Figure 11-6 General Parameters page

The screenshot displays the 'General Parameters' page for an IP camera. At the top, there is a blue navigation bar with icons for 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. Below this, a horizontal menu contains several tabs: '← Home', 'Intrusion', 'Smart Motion', 'Single Line Crossing', 'Double Line Crossing', 'Multi-Loitering', 'Wrong-Way', and 'General Parameters'. The 'General Parameters' tab is currently selected and highlighted. Underneath the tabs, the 'Basic Settings' section is visible. It includes a 'Target Filtering' option with a blue toggle switch that is turned on. Below this, there is a 'Target Stabilization Time' setting with a text input field containing the value '0' and a range indicator '(0~10000)ms'. At the bottom of the page, there is a blue 'Apply' button.

Step 2 Enable Target Filtering

- Toggle the switch to activate the feature.

Step 3 Set Target Stabilization Time

- This is the minimum duration a person or vehicle must remain in the detection area before an alarm is triggered.
- Input the desired stabilization time in seconds.

Step 4 Click **Apply**

- When the message "**Apply success!**" appears, the settings are successfully saved.

Note: This function is useful in environments with frequent brief movements, helping the system focus only on sustained activity.

11.8.2 Illegal Parking (Only for Some Models)

Description

This function generates an alarm when a vehicle remains in a designated detection area longer than the allowed parking time.

Procedure

Step 1 Navigate to **IVS > Intelligent Analysis > Illegal Parking**, as shown in Figure 11-7.

Figure 11-7 Illegal parking settings page

The screenshot displays the 'Illegal Parking' configuration page. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The 'IVS' tab is active, and the 'Illegal Parking' sub-tab is selected. The page is organized into three main sections: 'Basic Settings', 'Event Actions', and 'Schedule'. The 'Basic Settings' section contains 'Mode' (set to 'Preset Point Mode'), 'Preset Point Mode' (set to 'Preset 2'), 'Status' (checked), 'Alarm Interval' (set to 10), and 'Allowed Parking Time' (set to 5). The 'Event Actions' section includes 'Output Channel' (checkboxes for 1 and 2), 'Audible Alarm', 'Alarm Record', 'SMTP', 'FTP Upload', and 'Linkage Tracking'. The 'Schedule' section shows a 24-hour timeline with blue bars indicating active monitoring times for Sun, Mon, and Tue. A live video feed is displayed on the right side of the page, showing a parking area with a green rectangular detection zone. The video feed includes a timestamp '2024-07-11 08:13' and a 'Clear' button.

Step 2 Configure the following parameters:

(Refer to Section 9.2.1 Step 2 for details on parameter settings such as sensitivity, interval, and output actions.)

Step 3 Set a Deployment Area:

- Use the mouse to draw a region on the live video feed.

Step 4 Set the Schedule Time:

- See Section 7.1 Step 4 for instructions on setting active monitoring times.

Step 5 Click Apply

- A confirmation message "**Apply success!**" will confirm that the settings have been saved.

11.8.3 Enter Area

Description: Triggers an alarm when a target (such as a person or vehicle) enters a designated area during a scheduled time.

Step 1 Navigate to **Configuration > Intelligent Analysis > Enter Area**, as shown in Figure 11-8.

Figure 11-8 Enter Area

The screenshot displays the 'Enter Area' configuration page in the D-Link IP Camera web interface. The top navigation bar includes 'IP Camera', 'Live View', 'Playback', 'IVS', and 'Setting'. The main menu on the left lists various detection types: 'Intrusion', 'Smart Motion', 'Single Line Crossing', 'Double Line Crossing', 'Multi-Loitering', 'Wrong-Way', 'General Parameters', 'Illegal Parking', 'Enter Area' (selected), and 'Leave Area'. The 'Enter Area' configuration is divided into several sections:

- Channel:** A dropdown menu set to '4'.
- Basic Settings:**
 - Status:** A toggle switch that is turned on.
 - Alarm Interval:** A slider set to '10' with a range of '(1~1800)S'.
 - Sensitivity:** A slider set to '5'.
 - Limit Type:** A toggle switch that is turned off.
- Area Listings:** A table with columns 'Area ID', 'Min', 'Max', and 'Status'. It contains one entry with Area ID '1', Min '42 x 50', Max '85 x 50', and an unchecked 'Status' checkbox.
- Event Actions:**
 - Output Channel:** Radio buttons for '1' and '2'.
 - Audible Alarm:** A toggle switch that is turned on.
 - Audible Alarm File:** A dropdown menu set to 'Dangerous area. Keep away.wav'.
 - Alarm Record:** A toggle switch that is turned on.
 - Linkage Channel:** Radio buttons for '1', '2', '3', and '4'.
 - SMTP:** A toggle switch that is turned off.
 - FTP Upload:** A toggle switch that is turned off.
- Schedule:** A 24-hour timeline for 'Sun' and 'Mon' with a blue bar indicating the active monitoring period from 0 to 24 hours.


An 'Apply' button is located at the bottom left of the configuration area.

Set all parameters for enter area, please refer to chapter Figure 3-6

11.8.4 Leave Area

Description: Triggers an alarm when a target exits a predefined area during a valid monitoring period.

Step 1 Navigate to **Configuration > Intelligent Analysis > Leave Area**, as shown in Figure 11-9.




11.8.5.1 Heat Map Set (Only for Some Models)

 **NOTE**

Step 1 Navigate to **IVS > Behavior Analysis > Heat map > Set** interface, as shown in Figure 11-10.

Figure 11-10 Heat map set page

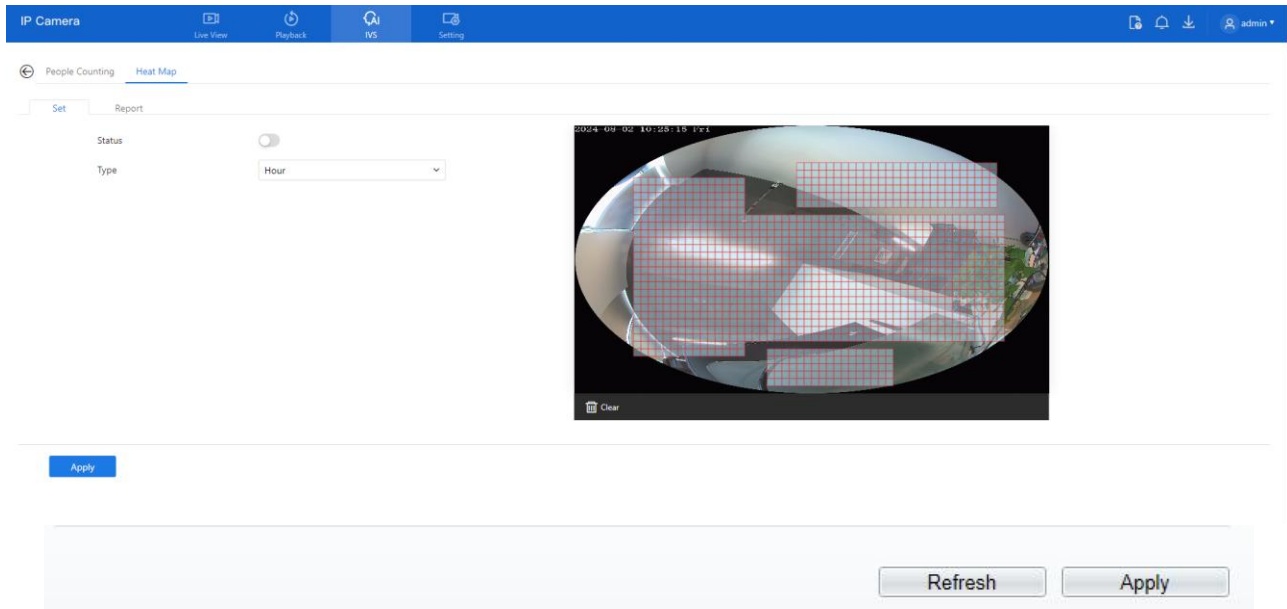

Step 2 Enable Heat Map Function:

- Toggle the **Status** button to turn on the heat map function.
- *Note: This feature is disabled by default and must be manually activated.*

Step 3 Select Type:

- Choose the statistical granularity:
 - **Hour:** Collects and displays 24 data segments per day.
 - **Day:** Displays one aggregated data point per day.
- *Switching between types will clear previously collected data. Please proceed with caution.*

Step 4 Click "Apply":

- Once the settings are configured, click **Apply** to save.
- The system will confirm with the message: **"Apply success!"**

11.8.5.2 Heat Map Report

Step 1 Navigate to **IVS > Behavior Analysis > Heat Map > Report**, the page as shown in Figure 11-12.

Figure 11-12 Heat map report page

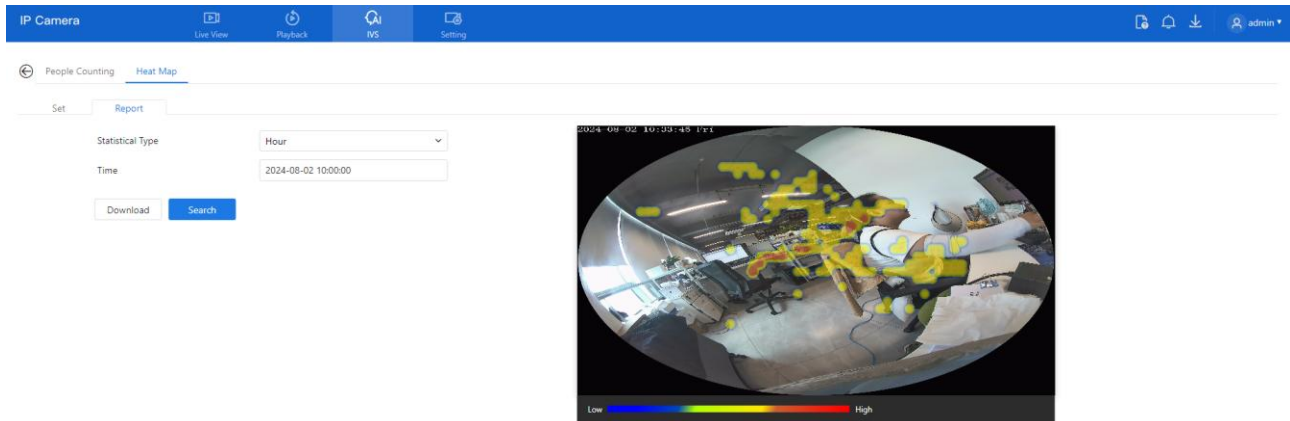


Table 11-1 Parameters of heat map

Parameter	Description	Setting
Type	Select either Data or Picture . Data is shown in numerical format and can be downloaded. Pictures display different heat levels via color mapping.	[How to set] Choose from the drop-down list [Default value] Normal mode
Statistics type	Select the time unit for analysis: Year, Month, Day, or Hour.	[How to set] Click the button on. [Default value] OFF
Time	Specify the time range for searching or downloading heat map data.	[How to set] Choose from the drop-down list
Heat map bar	Displays color-coded heat levels. Each color represents a different level of activity. The maximum value reflects the peak data in any area during the selected time.	Null

Step 2 Set Set the time range for analysis.

Step 3 Click Search to view the heat map directly, or


Step 4 Click Download to export the data in CSV format to your local folder.

Troubleshooting

Table 11-2 describes the common faults and solutions.

Table 11-2 Common faults and solutions

Common Fault	Possible Cause	Solution
When you enter the device IP address in the address box of Internet Explorer and press Enter , the message "There is a problem with this website's security certificate." is displayed.	The certificate is not installed.	Click Continue to this website (not recommended) to proceed .
The web management system cannot be accessed.	The network is disconnected.	Connect the PC directly to the camera, and verify that the web management system can be accessed. Run the ping command to verify that the camera is reachable.
	The IP address is used by another device.	Connect the PC directly to the camera and configure the IP address of the camera.
	The IP addresses of the PC and IP camera are on different networks.	Check the IP address, subnet mask, and gateway settings on the IP camera, and change the settings as required.
The PTZ or dome cannot be controlled.	The protocol, baud rate, or address is incorrect.	Change the protocol, baud rate, and address in the web management system to those used by the PTZ or dome.
	The signal cable is not properly connected.	Check the signal strength and connect the signal cable properly.

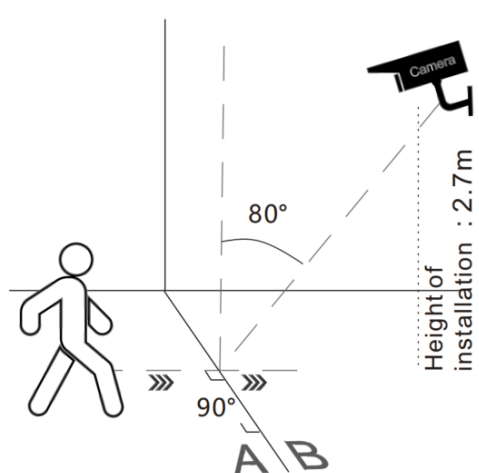Common Fault	Possible Cause	Solution								
After the IP camera is upgraded, the web management system cannot be accessed.	The browser cache is not deleted.	To delete the browser cache, proceed as follows: 1. Open browser. 2. Press Ctrl + Shift +Delete. The Delete Browsing History dialog box is displayed. 3. Select all check boxes. 4. Click Delete. Login to the web management system again.								
The IP camera cannot be upgraded.	The network is disconnected. The network settings are incorrect.	Confirm that the upgrade network is connected. Check the network settings.								
	The upgrade package is incorrect.	Obtain the correct upgrade package and upgrade the IP camera again.								
The accuracy of people counting is bad.	The installation method is fault.	Install camera and draw the line following as figure.  <table border="1"><thead><tr><th>Lens (mm)</th><th>Pixel: distance of recognition</th></tr></thead><tbody><tr><td>2.8</td><td>5M:3~40 8M:3~45</td></tr><tr><td>2.7~13.5 zoom=1</td><td>5M:3~35 8M:3~45</td></tr><tr><td>2.7~13.5 zoom=5</td><td>5M:5~105 8M:4.5~30</td></tr></tbody></table> General Environment is over 480Lux, 5000K	Lens (mm)	Pixel: distance of recognition	2.8	5M:3~40 8M:3~45	2.7~13.5 zoom=1	5M:3~35 8M:3~45	2.7~13.5 zoom=5	5M:5~105 8M:4.5~30
Lens (mm)	Pixel: distance of recognition									
2.8	5M:3~40 8M:3~45									
2.7~13.5 zoom=1	5M:3~35 8M:3~45									
2.7~13.5 zoom=5	5M:5~105 8M:4.5~30									
The capture performance of AI Multi-target is bad.	The lens is too short.	It is recommended to use 6mm focus length lens or above.								

Acronyms and Abbreviations

A

ADSL Asymmetric Digital Subscriber Line

C

CBR Constant Bit Rate

CGI Common Gateway Interface

CMS Central Management System

D

DHCP Dynamic Host Configuration Protocol

DNS Domain Name Server

DDNS Dynamic Domain Name Server

E

EAP Extensible Authentication Protocol

F

FTP File Transfer Protocol

G

GAMA Graphics Assisted Management Application

H

HTTP Hyper Text Transfer Protocol

HTTPS Hypertext Transfer Protocol Secure

I

ID Identity

ISO International Standard Organization

IP Internet Protocol

IPC Internet Protocol Camera

IVS Intelligent Video System

L

LPS Limited Power Source

M

MJPEG Motion Joint Photographic Experts Group

MAC	Media Access Control
MTU	Media Transmission Unit
N	
NAS	Network Attached Storage
NTP	Network Time Protocol
NTSC	National Television Standards Committee
O	
OSD	On Screen Display
P	
PAL	Phase Alteration Line
PoE	Power over Ethernet
PPPoE	Point-to-Point Protocol over Ethernet
PTZ	Pan/Tilt/Zoom
R	
ROI	Region of Interest
RSTP	Rapid Spanning Tree Protocol
S	
SMTP	Simple Mail Transfer Protocol
SSL	Secure Sockets Layer
V	
VBR	Variable Bit Rate