Quick Mesh Setup Guide


Add a Mesh Agent to your Mesh Controller in 4 simple steps.

1 Get ready

Set up the **Mesh Controller** (main router) for **Internet**. Check its LED is **steady blue**.

Place the **Mesh Agent** (new router) close by and plug it into power.

2 Hold the MESH button on both routers for at least 10 seconds and then release

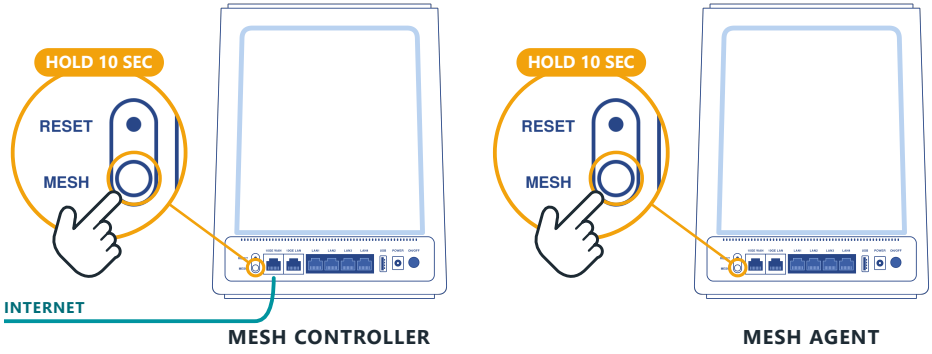

3 Wait about 2 minutes




The **Mesh LED** on the front of both routers flashes, then stays **steady on** when pairing is complete.

4 Done! Move it into place



When the **Mesh Agent's** status LED is **steady blue**, it's connected. Move it to its final location.

Adding a third router?



- Repeat **steps 1–4** using the **Mesh Controller**.
- Never pair with a **Mesh Agent**.
- Add **one router at a time**.