


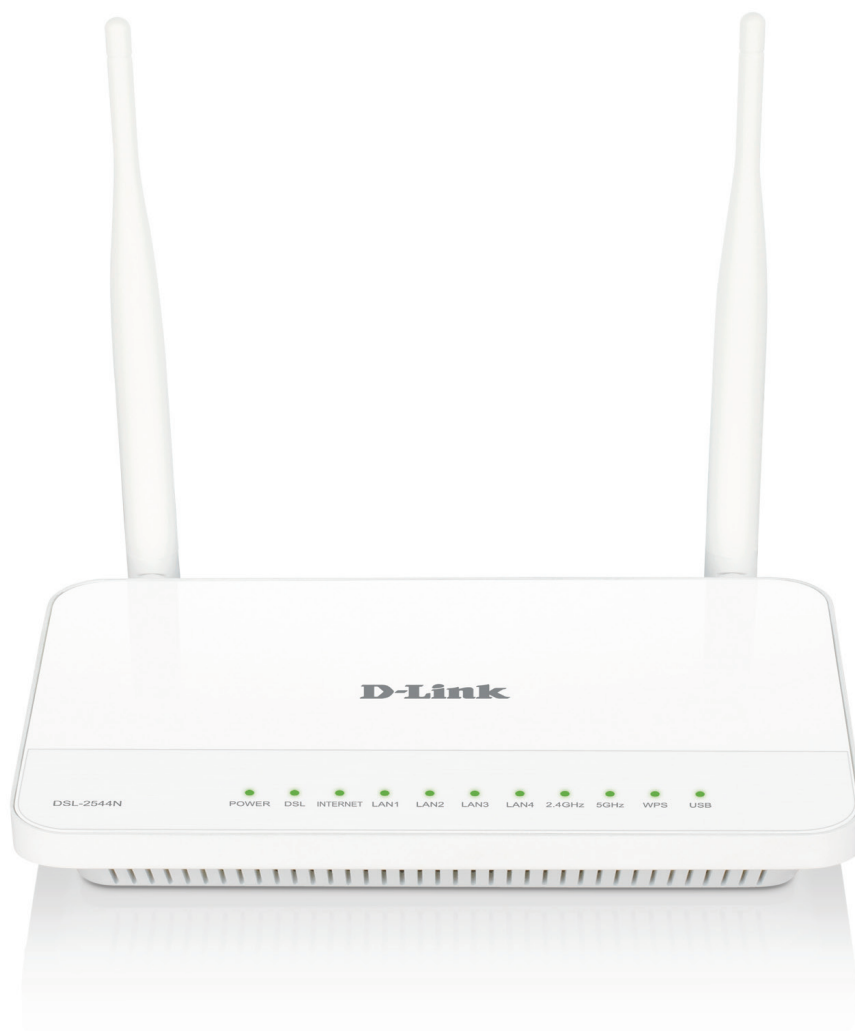

## User Manual

# DUAL BAND WIRELESS N600 GIGABIT ADSL2+ MODEM ROUTER

DSL-2544N

# Table of Contents

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>SAFETY PRECAUTION</b>                                   | <b>1</b>  |
| <b>INTRODUCTION</b>                                        | <b>1</b>  |
| <b>PACKAGE CONTENTS</b>                                    | <b>2</b>  |
| <b>SYSTEM REQUIREMENTS</b>                                 | <b>3</b>  |
| Features                                                   | 4         |
| <b>INSTALLATION</b>                                        | <b>5</b>  |
| Before You Begin                                           | 5         |
| Installation Notes                                         | 5         |
| Information you will need from your ADSL service provider  | 7         |
| Information you will need about your DSL-2544n ADSL Router | 8         |
| Information you will need about your LAN or computer       | 9         |
| Hardware Description and Installation                      | 10        |
| LED Indicators                                             | 10        |
| Button and interfaces                                      | 11        |
| Best location for Wireless Operation                       | 11        |
| Connecting the Router                                      | 12        |
| <b>WEB CONFIGURATION</b>                                   | <b>14</b> |
| Accessing the router                                       | 14        |
| Configuring IP Address of the Network Card                 | 14        |
| <b>SETUP</b>                                               | <b>15</b> |
| Wizard                                                     | 15        |
| Internet setup                                             | 18        |
| 2.4G Wireless                                              | 22        |
| 5G Wireless                                                | 23        |
| Local Network                                              | 24        |
| Local IPv6 Network                                         | 27        |
| Time and Date                                              | 28        |
| Logout                                                     | 28        |
| <b>ADVANCED</b>                                            | <b>29</b> |
| 2.4G Advanced wireless                                     | 29        |
| 5G Advanced wireless                                       | 33        |
| ALG                                                        | 33        |
| Port forwarding                                            | 34        |
| DMZ                                                        | 35        |
| SAMBAA                                                     | 36        |
| Parental Control                                           | 37        |
| Filtering Options                                          | 39        |
| QoS                                                        | 41        |
| SPI/DOS Protection                                         | 43        |
| DNS                                                        | 44        |
| Dynamic DNS                                                | 45        |
| Storage Service                                            | 46        |
| Network Tools                                              | 46        |
| Routing                                                    | 50        |
| NAT                                                        | 53        |
| Logout                                                     | 54        |

|                                    |           |
|------------------------------------|-----------|
| <b>MAINTENANCE</b>                 | <b>55</b> |
| System                             | 55        |
| Firmware Update                    | 56        |
| Access Controls                    | 56        |
| Diagnostics                        | 58        |
| Log Configuration                  | 61        |
| Logout                             | 61        |
| <b>TROUBLESHOOTING</b>             | <b>62</b> |
| NETWORKING BASICS                  | 64        |
| CHECK YOUR IP ADDRESS              | 64        |
| STATICALLY ASSIGNING AN IP ADDRESS | 65        |
| <b>TECHNICAL SPECIFICATIONS</b>    | <b>66</b> |

# Safety Precaution

Follow the following instructions to prevent the device from risks and damage

- Use the label-marked power.
- Use the power adapter in the package.
- An overburden power outlet or damaged lines and plugs may cause electric shock or fire accident. Check the power cords regularly. If you find any damage, replace it at once.
- Proper space left for heat dissipation is necessary to avoid overheating. The holes on the device are designed for heat dissipation to ensure running normally. Do not cover these heat dissipation holes.
- Do not put this device close to a heat source or high temperature place. Avoid the device direct exposing sunshine.
- Do not put this device close to over damp place. Do not spill any fluid on this device.
- Do not connect this device to PC or electronic product, unless our customer engineer or your broadband provider instructs you to do this, because any wrong connection may cause power or fire risk.
- Do not place this device on an unstable surface or support.

# Introduction

The DSL-2544N is a highly integrated ADSL2/2+ Integrated Access Device. It provides DSL uplink, Ethernet LAN and wireless LAN services. The wireless LAN is complied with the IEEE802.11b/g /n standards and supports 2T2R which can work at dual-band 2.4G and 5G. It is usually preferred to provide high access performance applications for the individual users, the SOHO, the small enterprises and so on.

# Package Contents

- 1 x DSL-2544N Router
- 1 x Power adapter
- 1 x Splitter
- 1 x RJ11 Phone Cable
- 1 x RJ45 Ethernet cable
- 1 x Installation CD

**Note:** Using a power supply with a different voltage rating other than the one included with the DSL-2544N may cause damage and void the warranty for this product.



# System Requirements

Recommended system requirements are as follows:

1. ADSL Internet service Computer with

- An 10 base T/100BaseT Ethernet card is installed on your PC
- A hub or switch (attached to several PCs through one of Ethernet interfaces on your router)
- Operating system: Windows 8/7/VISTA/XP/2000
- MAC OS
- Internet Explorer V6 or higher, Netscape V4.0 or higher, or Firefox v1.5 or higher
- 

D-Link Click's Connect Utility Computer with:

- Operating system: Windows 8/7/VISTA/XP/2000
- CD-ROM Drive



## Features

The device supports the following features:

- Various line modes
- External PPPoE dial-up access
- Internal PPPoE/PPPoA dial-up access
- 1483Bridged/1483Routed with dynamic ip or static ip
- Dual band wireless network (2.4G and 5G).
- Multiple PVCs (the number of PVCs support is eight)
- DHCP server/relay
- Static route
- Network Address Translation(NAT)
- DMZ
- Virtual Server
- Universal plug and play (UPnP)
- Dynamic Domain Name Server(DDNS)
- One-level password and username
- Network Time Protocol(NTP)
- Firmware upgrading through Web, TFTP, or FTP
- Resetting to the factory defaults through Reset button or Web
- Diagnostic test
- Web interface
- Telnet CLI
- IP/MAC/URL Filter
- Application layer service
- Quality of Service (QoS)
- Port binding
- Auto upgrade
- Net USB
- Digital Living Network Alliance (DLNA)

# Installation

This section will walk you through the installation process. Placement of the Router is very important. Do not place the Router in an enclosed area such as a closet, cabinet or in the attic or garage.

## Before You Begin

Please read and make sure you understand all the prerequisites for proper installation of your new Router. Have all the necessary information and equipment on hand before beginning the installation.

## Installation Notes

In order to establish a connection to the Internet it will be necessary to provide information to the Router that will be stored in its memory. For some users, only their account information (Username and Password) is required. For others, various parameters that control and define the Internet connection will be required. You can print out the two pages below and use the tables to list this information. This way you have a hard copy of all the information needed to setup the Router. If it is necessary to reconfigure the device, all the necessary information can be easily accessed. Be sure to keep this information safe and private.

### Low Pass Filters

Since ADSL and telephone services share the same copper wiring to carry their respective signals, a filtering mechanism may be necessary to avoid mutual interference. A low pass filter device can be installed for each telephone that shares the line with the ADSL line. These filters are easy to install passive devices that connect to the ADSL device and/or telephone using a standard telephone cable. Ask your service provider for more information about the use of low pass filters with your installation.

### Operating Systems

The DSL-2544N uses an HTML-based web interface for setup and management. The web configuration manager may be accessed using any operating system capable of running web browser software, including Windows, Mac OS and Linux.

### **Web Browser**

Any common web browser can be used to configure the Router using the web configuration management software. The program is designed to work best with more recently released browsers such as Opera, Microsoft Internet Explorer® version 6.0, Netscape Navigator® version 6.2.3, or later versions. The web browser must have JavaScript enabled. JavaScript is enabled by default on many browsers. Make sure JavaScript has not been disabled by other software (such as virus protection or web user security packages) that may be running on your computer.

### **Ethernet Port (NIC Adapter)**

Any computer that uses the Router must be able to connect to it through the Ethernet port on the Router. This connection is an Ethernet connection and therefore requires that your computer be equipped with an Ethernet port as well. Most notebook computers are now sold with an Ethernet port already installed. Likewise, most fully assembled desktop computers come with an Ethernet NIC adapter as standard. If your computer does not have an Ethernet port, you must install an Ethernet NIC adapter before you can use the Router. If you need to install an adapter, follow the installation instructions that come with the Ethernet NIC adapter.

### **Additional Software**

It may be necessary to install software on your computer that enables the computer to access the Internet. Additional software must be installed if you are using the device as a simple bridge. For a bridged connection, the information needed to make and maintain the Internet connection is stored on another computer or gateway device, not in the Router itself.

If your ADSL service is delivered through a PPPoE or PPPoA connection, the information needed to establish and maintain the Internet connection can be stored in the Router. In this case, it is not necessary to install software on your computer. It may however be necessary to change some settings in the device, including account information used to identify and verify the connection.

All connections to the Internet require a unique global IP address. For bridged connections, the global IP settings must reside in a TCP/IP enabled device on the LAN side of the bridge, such as a PC, a server, a gateway device, such as a router, or similar firewall hardware. The IP address can be assigned in a number of ways. Your network service provider will give you instructions about any additional connection software or NIC configuration that may be required.

## Information you will need from your ADSL service provider

### **Username**

This is the Username used to log on to your ADSL service provider's network. Your ADSL service provider uses this to identify your account.

### **Password**

This is the Password used, in conjunction with the Username above, to log on to your ADSL service provider's network. This is used to verify the identity of your account.

### **WAN Setting / Connection Type**

These settings describe the method your ADSL service provider uses to transport data between the Internet and your computer. Most users will use the default settings. You may need to specify one of the following WAN Setting and Connection Type configurations (Connection Type settings listed in parenthesis):

- ☐ PPPoE/PPPoA (PPPoE LLC, PPPoA LLC or PPPoA VC-Mux)
- ☐ Bridge Mode (1483 Bridged IP LLC or 1483 Bridged IP VC Mux)
- ☐ IPoA/MER (Static IP Address) (Bridged IP LLC, 1483 Bridged IP VC Mux, 1483 Routed IP LLC, 1483 Routed IP VC-Mux or IPoA)
- ☐ MER (Dynamic IP Address) (1483 Bridged IP LLC or 1483 Bridged IP VC-Mux)

### **Modulation Type**

ADSL uses various standardized modulation techniques to transmit data over the allotted signal frequencies. Some users may need to change the type of modulation used for their service. The default DSL modulation (ADSL2+ Multi-Mode) used for the Router automatically detects all types of ADSL, ADSL2 and ADSL2+ modulation.

### **Security Protocol**

This is the method your ADSL service provider will use to verify your Username and Password when you log on to their network. Your Router supports the PAP and CHAP protocols.

### **VPI**

Most users will not be required to change this setting. The Virtual Path Identifier (VPI) is used in conjunction with the Virtual Channel Identifier (VCI) to identify the data path between your ADSL service provider's network and your computer. If you are setting up the Router for multiple virtual connections, you will need to configure the VPI and VCI as instructed by your ADSL service provider for the additional connections. This setting can be changed in the WAN Settings window of the web management interface.

### **VCI**

Most users will not be required to change this setting. The Virtual Channel Identifier (VCI) is used in conjunction with the VPI to identify the data path between your ADSL service provider's network and your computer. If you are setting up the Router for multiple virtual connections, you will need to configure the VPI and VCI as instructed by your ADSL service provider for the additional connections. This setting can be changed in the WAN Setup window of the web management interface.

## Information you will need about your DSL-2544N ADSL Router

### **Username**

This is the Username needed to access the Router's management interface. When you attempt to connect to the device through a web browser you will be prompted to enter this Username. The default Username for the Router is "admin." The user cannot change this.

### **Password**

This is the Password you will be prompted to enter when you access the Router's management interface. The default Password is "admin." The user may change this.

### **LAN IP addresses for the DSL-2544N**

This is the IP address you will enter into the Address field of your web browser to access the Router's configuration graphical user interface (GUI) using a web browser. The default IP address is **192.168.1.1**. This may be changed to suit any IP address scheme the user desires. This address will be the base IP address used for DHCP service on the LAN when DHCP is enabled.

### **LAN Subnet Mask for the DSL-2544N**

This is the subnet mask used by the DSL-2544N and will be used throughout your LAN. The default subnet mask is **255.255.255.0**. This can be changed later.

## Information you will need about your LAN or computer

### **Ethernet NIC**

If your computer has an Ethernet NIC, you can connect the DSL-2544N to the Ethernet port using an Ethernet cable. You can also use the Ethernet ports on the DSL-2544N to connect to other computers or Ethernet devices.

### **DHCP Client status**

Your DSL-2544N ADSL Router is configured, by default, to be a DHCP server. This means that it can assign an IP address, subnet mask and a default gateway address to computers on your LAN. The default range of IP addresses the DSL-2544N will assign are from 192.168.1.2 to 192.168.1.254. Your computer (or computers) needs to be configured to obtain an IP address automatically (that is, they need to be configured as DHCP clients.)

It is recommended that you collect and record this information here, or in some other secure place, in case you have to re-configure your ADSL connection in the future.

Once you have the above information, you are ready to setup and configure your DSL-2544N ADSL Router.

## Hardware Description and Installation

### LED Indicators

**Note:** The figures in this document are for reference only.



Figure 1 Front panel

The following table describes the LEDs of the device.

| LED         | Color | Status      | Description                                                                                                         |
|-------------|-------|-------------|---------------------------------------------------------------------------------------------------------------------|
| Power       | Green | On          | The initialization of the system is complete.                                                                       |
|             | Red   | On          | The device is powered on.                                                                                           |
|             |       | Blinking    | The firmware is upgrading.                                                                                          |
| DSL         | Green | Off         | No signal is being detected.                                                                                        |
|             |       | Blinking    | The device is handshaking with the physical layer of the office end.                                                |
|             |       | On          | A connection is set up with the physical layer of the office end.                                                   |
| Internet    | Green | Off         | The device is under the Bridge mode or powered off.                                                                 |
|             |       | On          | A successful connection has been made.                                                                              |
|             | Red   | On          | The authentication of the PPP dial-up has failed or MER has failed to obtain the correct IP address.                |
| LAN 1/2/3/4 | Green | Off         | The Ethernet interface is not properly connected.                                                                   |
|             |       | Blinking    | The Ethernet interface is properly connected and data is being transmitted.                                         |
|             |       | On          | The Ethernet interface is properly connected, but no data is being transmitted.                                     |
| 2.4GHz/5GHz | Green | Blinking    | The WLAN function is enabled and data is being transmitted on the WLAN.                                             |
|             |       | On          | The WLAN function is enabled, but no data is being transmitted on the WLAN.                                         |
|             |       | Off         | The WLAN function is disabled.                                                                                      |
| USB         | Green | On          | The USB connection is set up or USB flash disk is enabled.                                                          |
|             |       | Blinking    | A connection is set up and data is being transmitted.                                                               |
|             |       | Off         | No signal is detected.                                                                                              |
| WPS         | Green | Solid light | Connection is successfully established between the router and the client, the LED would light steady for 5 seconds. |

| LED | Color | Status   | Description                        |
|-----|-------|----------|------------------------------------|
|     |       | Blinking | WPS is successfully triggered.     |
|     |       | Off      | Device is ready for new WPS setup. |

Button and Interfaces

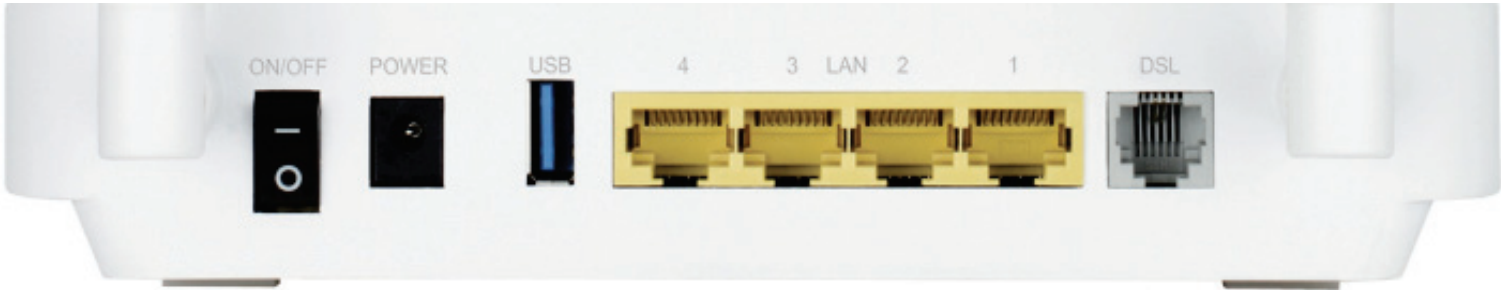


Figure 2 Rear panel

The following table describes the interfaces of the device.

| Interface/Button        | Description                                                                                                                                                                                                                                                                      |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ON/OFF                  | Power switch, which is used to power on or power off the device.                                                                                                                                                                                                                 |
| POWER                   | Interface for connecting the power adapter.                                                                                                                                                                                                                                      |
| USB                     | USB port for connecting a USB storage device.                                                                                                                                                                                                                                    |
| LAN4/3/2/1              | RJ-45 interface for connecting the device to the Ethernet interface of PC or other Ethernet devices through the Ethernet cable.                                                                                                                                                  |
| DSL                     | RJ-11 interface for connecting the device to the telephone jack on the wall or the <b>MODEM</b> interface of the splitter through a telephone line.                                                                                                                              |
| WPS (on the side panel) | <ul style="list-style-type: none"><li>● Press and hold the button for 5 seconds to start 2.4GHz WPS negotiation. Press and hold for 5 to 10 seconds to start 5GHz WPS negotiation.</li><li>● Press and hold the button for 15 seconds to restore the factory defaults.</li></ul> |

Best Location for Wireless Operation

Many environmental factors may affect the effective wireless function of the DSL Router. If this is the first time that you set up a wireless network device, read the following information:


The access point can be placed on a shelf or desktop, ideally you should be able to see the LED indicators in the front, as you may need to view them

for troubleshooting.

Designed to go up to 100 meters indoors and up to 300 meters outdoors, wireless LAN lets you access your network from anywhere you want. However, the numbers of walls, ceilings, or other objects that the wireless signals must pass through limit signal range. Typical ranges vary depending on types of materials and background RF noise in your home or business.

### Connecting the Router

The following figure shows the connection of the Router, PC, and telephones.

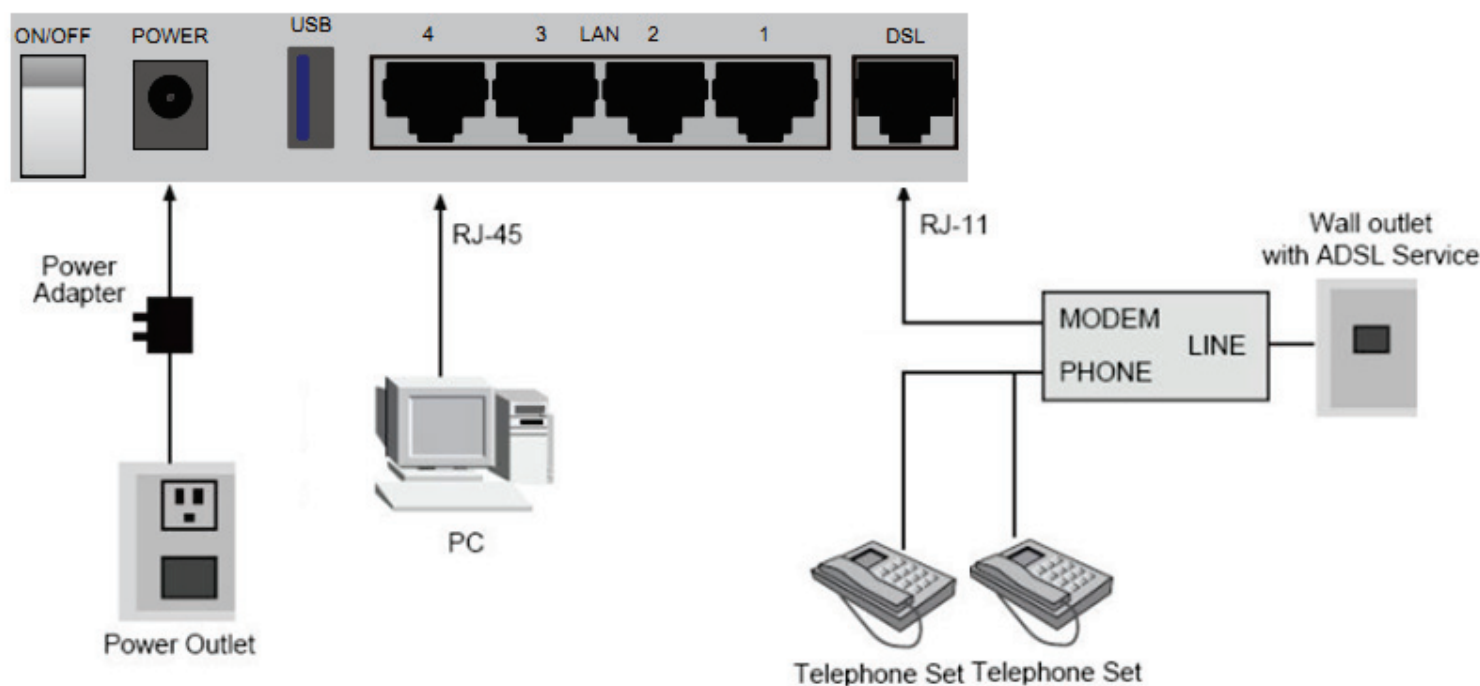

**Step 1** Connect the **DSL** port of the router and the Modem port of the splitter through a telephone cable; connect the phone to the phone port of the splitter through a telephone cable; and connect the Line port of the splitter to the uplink telephone jack on the wall.

The splitter has three ports:

- **LINE:** Connect to a wall phone jack (RJ-11 jack)
- **Modem:** Connect to the Line interface of the router

- **PHONE:** Connect to a telephone set

**Step 2** Connect the **LAN** port of the router to the network interface card (NIC) of the PC through an Ethernet cable (MDI/MDIX).

**Step 3** Plug the power adapter to the wall outlet and then connect the other end of it to the **Power** port of the route

# Web Configuration

This chapter describes how to use Web-based management of the DSL router, which allows you to configure and control all of DSL router features and system parameters in a user-friendly GUI.

## Accessing the Router


### Configuring IP Address of the Network Card

Configure TCP/IP properties of your network card to **Obtain an IP address automatically from modem**, or set the IP address of the computer with the same network mask of the modem.


For example, if the IP address of Router is 192.168.1.1/255.255.255.0, you can set the IP address of the computer to **192.168.1.x/255.255.255.0**. The range for x is from 2 to 254.

The following description is a detail “How-To” user guide and is prepared for first time users.

- Step 1** Open the Internet Explorer (IE) browser, and then go to <http://192.168.1.1>.
- Step 2** The Login page is shown as the figure appears on the right. Select admin from the drop-down list of username and enter the password.
  - The password is **admin**.

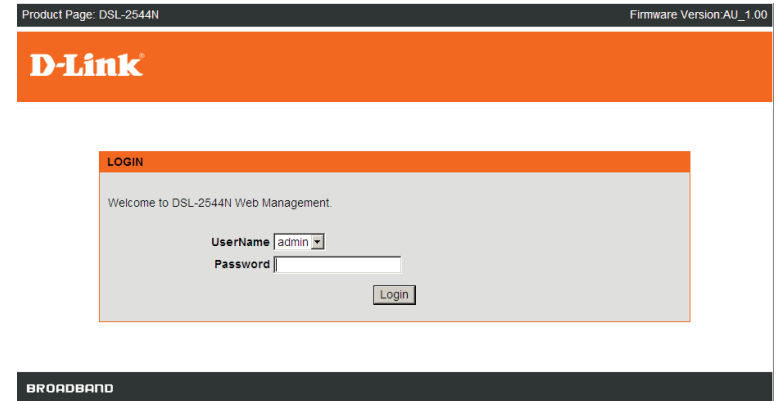

**Step 3** If you log in as admin successfully, the page is shown as the figure appears on the right. You can query, configure, and modify all configurations, and diagnose the system.

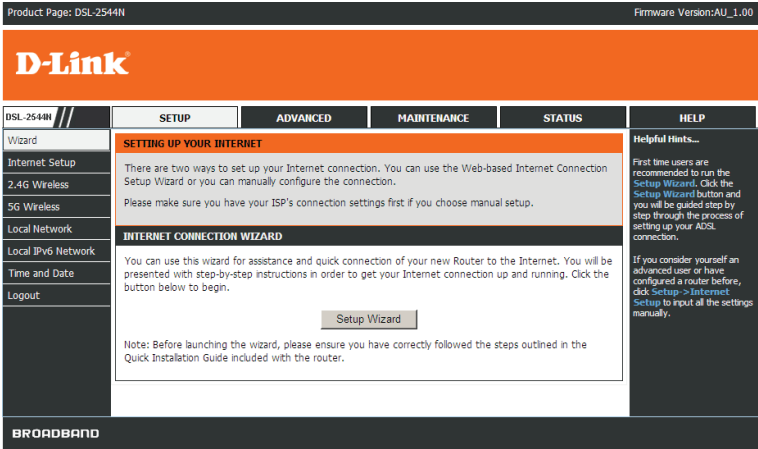


# SETUP

## Wizard

**Wizard** enables fast and accurate configuration of Internet connection and other important parameters. The following sections describe these various configuration parameters.

When subscribing to a broadband service, you should be aware of the method, by which you are connected to the Internet. The connection type of your physical WAN device can be Ethernet, DSL, or both. Technical information about the properties of your Internet connection is provided by your Internet service provider (ISP). For example, your ISP should inform you whether you are connected to the Internet using a static or dynamic IP address, or the protocol, such as PPPoA or PPPoE, that you use to communicate over the Internet.

**Step 1** Choose **SETUP > Wizard**. The page is shown as the figure appears on the right.

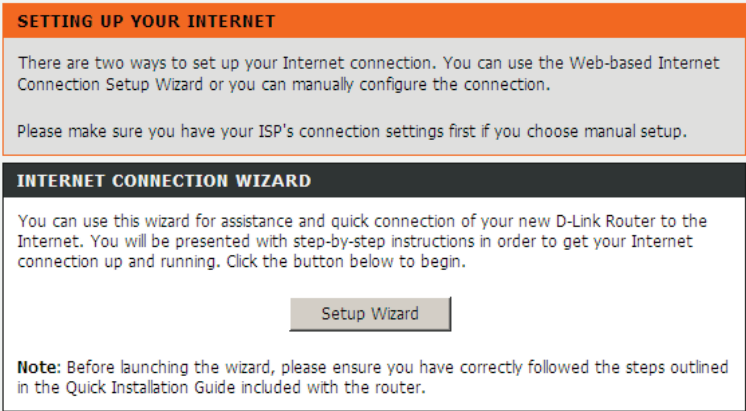

**Step 2** Click **Setup Wizard**. The page is shown as the figure appears on the right.

**Step 3** There are four steps to configure the device. Click **Next** to continue.

**Step 4** Set the time and date, and click **Next**.

**Step 5** Configure the Internet connection.

- **PPPoE/PPPoA**

Select the country and ISP. Set the VPI and VCI. If you fail to find the country and ISP from the drop-down lists, select **Others**, and then click **Next**. If the **Protocol** is set to be **PPPoE** or **PPPoA** and **Connection Type** is **LLC**, the page is shown as the figure appears on the right.

In this page, enter the user name and password provided by your ISP.

WELCOME TO SETUP WIZARD

This wizard will guide you through a step-by-step process to configure your new router and connect to the Internet.

Step 1 : Set Time and Date

Step 2 : Setup Internet Connection

Step 3 : Configure Wireless Network

Step 4 : Save and Apply Changes

Next

Cancel

STEP 1: SET TIME AND DATE → 2 → 3 → 4

The Time Configuration option allows you to configure, update, and maintain the correct time on the internal system clock. From this section you can set the time zone that you are in and set the NTP (Network Time Protocol) Server. Daylight Saving can also be configured to automatically adjust the time when needed.

TIME SETTING

☒ Automatically synchronize with Internet time servers

1st NTP time server : ntp.dlink.com.tw

2th NTP time server : ntp1.dlink.com

TIME CONFIGURATION

Time Zone : (GMT+10:00) Brisbane, Sydney

Back

Next

Cancel

STEP 2: SETUP INTERNET CONNECTION → 3 → 4

Please select your Country from the list below.

Country : (Click to Select)

Protocol : PPPoE

Encapsulation Mode: LLC

VPI : 8 (0-255)

VCI : 35 (32-65535)

PPPOE/PPPOA

Please enter your Username and Password as provided by your ISP (Internet Service Provider). Please enter the information exactly as shown taking note of upper and lower cases. Click "Next" to continue.

Username :

Password :

Confirm Password :

Back

Next

Cancel

- **Static IP**

If the internet service you subscribed is Static IP, the Protocol is set to be Static IP, the page shown as the figure appears on the right.

In this page, enter the **IP Address**, **Subnet Mask**, **Default Gateway** and **Primary DNS Server** provided by your ISP.  
If the Protocol is set to be **Dynamic IP** and **Bridge**, the content of the page will be slightly different.  
After settings, click **Next** to go to the next page.

**Step 6** Configure the wireless network. Enter the information and click **Next**.

The following table describes the fields in this page.

| Field                        | Description                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enable Your Wireless Network | <ul style="list-style-type: none"><li>To enable or disable wireless network connection.</li></ul>                                                                                                          |
| Wireless Network Name (SSID) | <ul style="list-style-type: none"><li>Set a name for your wireless network.</li></ul>                                                                                                                      |
| Visibility status            | <ul style="list-style-type: none"><li>Visible: Your SSID can be found by wireless clients.</li><li>Invisible: Your SSID is hided. Wireless clients need to manually enter your SSID and connect.</li></ul> |
| Security Mode                | You can choose a security mode to protect your wireless network. It is recommended selecting <b>WPA2-PSK</b> .                                                                                             |
| WPA2 Pre-Shared Key          | Enter a password. The length of the password is between 8-63 characters.                                                                                                                                   |

STEP 2: SETUP INTERNET CONNECTION → 3 → 4

Please select your Country from the list below.

Country : (Click to Select)

Protocol : Static IP

Encapsulation Mode: LLC

VPI : 8 (0-255)

VCI : 35 (32-65535)

STATIC IP

You have selected Static IP Internet connection. Please enter the appropriate information below as provided by your ISP.

The Auto PVC Scan feature will not work in all cases so please enter the VPI/VCI numbers if provided by the ISP.

Click Next to continue.

IP Address :

Subnet Mask :

Default Gateway :

Primary DNS Server :

Back Next Cancel

STEP 3: CONFIGURE WIRELESS NETWORK → 4

Your wireless network is enabled by default. You can simply uncheck it to disable it and click "Next" to skip configuration of wireless network.

Enable Your Wireless Network : ☒

Your wireless network needs a name so it can be easily recognized by wireless clients. For security purposes, it is highly recommended to change the pre-configured network name.

Wireless Network Name (SSID) :

SSID (2.4G) : D-Link DSL-2544N

SSID (5.8G) : D-Link DSL-2544N 5Ghz

Select "Visible" to publish your wireless network and SSID can be found by wireless clients, or select "Invisible" to hide your wireless network so that users need to manually enter SSID in order to connect to your wireless network.

Visibility Status : ☒ Visible ☐ Invisible

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

None Security Level Best

☐ None ☐ WPA-PSK ☒ WPA2-PSK

Security Mode:WPA2-PSK

Select this option if your wireless adapters support WPA2-PSK.

Now, please enter your wireless security key :

WPA2 Pre-Shared Key :

(8-63 characters, such as a~z, A~Z, or 0~9, i.e. "%Fortress123&")

Note: You will need to enter the same key here into your wireless clients in order to enable proper wireless connection.

Back Next Cancel

**Step 7** Click **Apply** to apply the current settings and finished the setup of the DSL-2544N router. Click **Back** to review or modify settings.

STEP 4: SAVE AND APPLY CHANGES

Setup complete. Click "Back" to review or modify settings.  
If your Internet connection does not work, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.

Back

Finish

**Note:** In each step of the Wizard page, you can click **Back** to review or modify the previous settings. Click Cancel to exit the wizard page.

Internet Setup

Choose **SETUP > Internet Setup**. The page is shown as the figure appears on the right. In this page, you can configure the WAN interface of the device.

DSL-2544N

Wizard

Internet Setup

2.4G Wireless

5G Wireless

Local Network

Local IPv6 Network

Time and Date

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

HELP

Internet Setup

Choose "Add", "Edit", or "Delete" to configure WAN interfaces.

WAN SETUP

| VPI/VCI | VLAN ID | ENCAP | Service Name | Protocol | State | Status       | Default Gateway | Action |
|---------|---------|-------|--------------|----------|-------|--------------|-----------------|--------|
| 8/81    | 0       | LLC   | wan_8192     | DHCP     | 1     | Disconnected |                 | N/A    |

Add

Edit

Delete

Helpful Hints...

Choose "Add", "Edit", or "Delete" button to configure WAN interfaces.

You can manually choose one WAN Connection to be Default Gateway.

When the Protocol of WAN Connection is PPPoA or PPPoE and Dial-up mode is Manual, you can manually Connect or Disconnect this WAN Connection.

Click **Add** in the page of **INTERNET SETUP**. The page is shown in the figure appears on the right.

The following table describes the parameters in this page.

| Field              | Description                                                                                                                                   |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| VPI                | The virtual path between two points in an ATM network and its valid value is from 0 to 255.                                                   |
| VCI                | The virtual channel between two points in an ATM network, ranging from 32 to 65535 (0 to 31 is reserved for local management of ATM traffic). |
| Service Category   | You can select from the drop-down list.                                                                                                       |
| QoS Scheduler      | You can choose Strict Priority or Weighted Fair Queuing.                                                                                      |
| Protocol           | You can select from the drop-down list.                                                                                                       |
| Encapsulation Mode | Select the method of encapsulation provided by your ISP. You can select from the drop-down list.                                              |

**INTERNET SETUP**  
 This screen allows you to configure an WAN connection.

**ATM PVC CONFIGURATION**  
 Country :   
 VPI :  (0-255)  
 VCI :  (32-65535)  
 Service Category :   
 Peak Cell Rate :  (cells/s)  
 Sustainable Cell Rate :  (cells/s)  
 Maximum Burst Size :  (cells)

**CONNECTION TYPE**  
 Protocol :   
 Encapsulation Mode :   
 802.1Q VLAN ID :  (0 = disable, 1 - 4094)  
 Priority :  (0 - 7)

Enable Service : ☒  
 Service Name :

After setting, click **Apply** to save the settings.

If you select the **PPP over Ethernet (PPPoE)** or **PPP over ATM (PPPoA)** as the **protocol**, the following page appears.

- **PPP Username/Password:** The correct user name and password that your ISP provides to you.
- **Authentication Method:** There are four methods available in the drop-down list: **AUTO**, **PAP**, **CHAP**, or **MSCHAP**. Usually, you can select **AUTO**.
- **Dial on mode:**
- **AlwaysOn:** If you select it, the system automatically establishes a connection. If the network is disconnected because of external factors when you are using the Internet access service, the system tries connection every certain time (for example, 10 seconds) until the connection is established. If you pay for Internet access in the monthly fee mode, you are recommended to use this connection mode.

**OnDemand:** If you select it, the system automatically establishes a connection when a network access request from the LAN is received. If no network access request is sent from the LAN within the set time of **Idle Timeout**, the system automatically interrupts the connection. If you pay for Internet access by time, you are recommended to use this connection mode, which effectively saves the expense of Internet access.

**Manual:** If you select it, you need to manually set dialup connection after startup. If this function is enabled, you need to enter the idle timeout time. Within the preset minutes, if the modem does not detect the flow of the user continuously, the modem automatically stops the PPPoE connection. Once it detects the flow (like access to a webpage), the modem restarts the PPPoE dialup.

- **MRU Size:** Maximum Receive Unit. The Maximum Receive Unit(MRU) option must not be negotiated to a size larger than 1492, unless both the PPPoE client and server have indicated the ability to support a larger MRU in the PPPoE Discovery Stage.
- **MTU Size:** Maximum Transmission Unit. Sometimes, you must modify this function to access network successfully.
- **Keep Alive:** Enable or disable the PPPoE dial-up to keep alive.

| ATM PVC CONFIGURATION                                                      |                                     |
|----------------------------------------------------------------------------|-------------------------------------|
| Country :                                                                  | (Click to Select) ▾                 |
| VPI :                                                                      | 0 (0-255)                           |
| VCI :                                                                      | 35 (32-65535)                       |
| Service Category :                                                         | UBR With PCR ▾                      |
| Peak Cell Rate :                                                           | 0 (cells/s)                         |
| Sustainable Cell Rate :                                                    | 0 (cells/s)                         |
| Maximum Burst Size :                                                       | 0 (cells)                           |
| CONNECTION TYPE                                                            |                                     |
| Protocol :                                                                 | PPP over Ethernet (PPPoE) ▾         |
| WAN Service Type :                                                         | Internet ▾                          |
| Encapsulation Mode :                                                       | LLC ▾                               |
| 802.1Q VLAN ID :                                                           | 0 (0 = disable, 1 - 4094)           |
| Priority :                                                                 | 0 (0 - 7)                           |
| IP Protocol :                                                              | IPv4 ▾                              |
| WAN PPP SETTINGS                                                           |                                     |
| PPP Username :                                                             | <input type="text"/>                |
| PPP Password :                                                             | <input type="password"/>            |
| Confirm PPP Password :                                                     | <input type="password"/>            |
| Authentication Method :                                                    | AUTO ▾                              |
| Dial-up mode :                                                             | AlwaysOn ▾                          |
| Inactivity Timeout :                                                       | 100 (Minuter 1~1092)                |
| MRU Size :                                                                 | 1492 (576~1492)                     |
| MTU Size :                                                                 | 1400 (576~1492)                     |
| Keep Alive :                                                               | <input type="checkbox"/>            |
| LCP Echo Interval (sec) :                                                  | 30                                  |
| LCP Echo Failure :                                                         | 5                                   |
| Use Static IP Address :                                                    | <input type="checkbox"/>            |
| IP Address :                                                               | <input type="text"/>                |
| Enable NAT :                                                               | <input checked="" type="checkbox"/> |
| NAT Type :                                                                 | Full Cone Nat ▾                     |
| Enable Service :                                                           | <input checked="" type="checkbox"/> |
| Service Name :                                                             | PPPoE_0_3                           |
| <input type="button" value="Apply"/> <input type="button" value="Cancel"/> |                                     |

- **Use Static IP Address:** If this function is disabled, the modem obtains an IP address assigned by an uplink equipment such as BAS, through PPPoE dial-up.

If this function is enabled, the modem uses this IP address as the WAN IP address.

- **Enable NAT:** Select it to enable the NAT functions of the modem. If you do not want to enable NAT and wish the modem user to access the Internet normally, you must add a route on the uplink equipment. Otherwise, the access to the Internet fails. Normally, NAT should be enabled.

If you select the **MAC Encapsulation Routing (MER)** as the connection protocol, the page is shown as the figure appears on the right.

- **Use the following address:** Check to use the following entered IP address.
- **WAN IP Address:** Enter the WAN IP address provided by the ISP.
- **WAN Subnet Mask:** Enter the subnet mask concerned to the IP address of the WAN interface provided by your ISP.
- **Default Gateway:** Enter the IP address of the gateway provided by the ISP. It is the IP address used for connecting to the ISP.
- **Preferred DNS Server:** Enter the IP address of the primary DNS server.
- **Alternate DNS server:** Enter the IP address of the secondary DNS server provided by your ISP.

CONNECTION TYPE

Protocol :

MAC Encapsulation Routing (MER)

WAN Service Type :

Internet

Encapsulation Mode :

LLC

802.1Q VLAN ID :

0

(0 = disable, 1 - 4094)

Priority :

0

(0 - 7)

IP Protocol :

IPv4

WAN IP SETTINGS

☐ Use the following address :

WAN IP Address :

WAN Subnet Mask :

Default gateway :

Preferred DNS server :

Alternate DNS server :

Enable NAT :

☒

NAT Type :

Full Cone Nat

Enable Service :

☒

Service Name :

MER\_0\_3

Apply

Cancel

For **IP over ATM** and **Bridging**, there only slight difference with protocols mentioned above, please take the descriptions of other protocols for reference.

After proper settings, click **Apply** to save the settings.

## 2.4G Wireless

Choose **SETUP > 2.4G Wireless**. The **Wireless Connection** page is shown as the figure appears on the right. In this page, you can configure the wireless settings for your router.

The following table describes the parameters in this page.

| Field                  | Description                                                                                                                                                                                                                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enable Wireless        | Select this to turn Wi-Fi on.                                                                                                                                                                                                                                                                                    |
| AP Isolation           | Select this to turn MultiAP isolation on.                                                                                                                                                                                                                                                                        |
| SSID                   | The Wireless Network Name is a unique name that identifies a network. All devices on a network must share the same wireless network name in order to communicate on the network. If you decide to change the wireless network name from the default setting, enter your new wireless network name in this field. |
| Visibility Status      | Select <b>Visible</b> , the SSID can be detected. Select <b>Invisible</b> , the SSID cannot be detected.                                                                                                                                                                                                         |
| Country                | Select the country you located from the drop-down list.                                                                                                                                                                                                                                                          |
| 802.11 Mode            | Select the appropriate 802.11 mode based on the wireless clients in your network. It is recommended to keep it as default.                                                                                                                                                                                       |
| Band Width             | Select the appropriate band of <b>20M</b> or <b>20M/40M</b> according to your subscribed broadband service.                                                                                                                                                                                                      |
| Wireless Channel       | Select the wireless channel from the pull-down menu. It is different for different country.                                                                                                                                                                                                                      |
| Wireless Security Mode | Wireless security is vital to your network to protect the wireless communication among wireless stations, access points and wired network. There are four security modes: <b>None</b> , <b>WPA only</b> , <b>WPA2</b> , and <b>WPA/WPA2 Mixed</b> .                                                              |

The screenshot shows the '2.4G WIRELESS SETUP' page of a D-Link DSL-2544N router. The left sidebar contains a navigation menu with options: DSL-2544N, Wizard, Internet Setup, 2.4G Wireless (selected), 5G Wireless, Local Network, Local IPv6 Network, Time and Date, and Logout. The main content area has tabs for SETUP, ADVANCED, MAINTENANCE, and STATUS. The '2.4G WIRELESS SETUP' section includes a note about configuration changes and a checkbox for 'Enable wireless' which is checked. Below this is the 'WIRELESS BASIC CONFIGURATION' section with fields for AP Isolate (unchecked), SSID (D-Link DSL-2544N), Visibility Status (radio buttons for Visible and Invisible, with Visible selected), Country (Australia), 802.11 Mode (Mixed 802.11b/g), Band Width (20M), and Wireless Channel (Auto Scan(recommended)). The 'WIRELESS SECURITY CONFIGURATION' section shows Wireless Security Mode set to None. At the bottom are 'Apply' and 'Cancel' buttons.

If the wireless security mode is set to be **WPA/WPA2 Mixed**, **WPA only** or **WPA2**, the page shown as the figure appears on the right.

The following table describes the parameters in this page.

| Field                     | Description                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WPA Mode                  | <ul style="list-style-type: none"><li>● Select <b>Personal</b>, enter the pre-shared key in the <b>Pre-Shared Key</b> field.</li><li>● Select <b>Enterprise</b>, enter the port, IP address, and password of the Radius server. You need to enter the username and password provided by the Radius server when the wireless client connects the modem.</li></ul> |
| Encryption Mode           | You can select WPA encryption to be <b>AES</b> or <b>TKIP+AES</b> .                                                                                                                                                                                                                                                                                              |
| Group Key Update Interval | When WPA encryption is applied, messages sent are encrypted with a password. For higher security, WPA password is updated periodically. This value is the update interval of the WPA password.                                                                                                                                                                   |

WIRELESS SECURITY CONFIGURATION

Wireless Security Mode : WPA/WPA2 Mixed

WPA/WPA2 MIXED

WPA Mode : Personal

Encryption Mode : AES

Group Key Update Interval : 100 (60 - 65535)

PRE-SHARED KEY

Pre-Shared Key : (ASCII < 64, HEX = 64)

ApplyCancel

After setting, click **Apply** to save the settings.

5G Wireless

In anti-attenuation capability, the 2.4GHz wireless connection is superior to 5GHz connection, but in signal interference the former is inferior to the latter.

The 5G wireless configuration parameters are similar that of 2.4GHz.

Choose **SETUP > 5G Wireless**. The **Wireless Connection** page is shown as the figure appears on the right. In this page, you can configure the wireless settings for your router. The parameters in this page are similar to those in 2.4G wireless page. You can refer to the description of parameters in **2.4G Wireless**.

DSL-2544N

Wizard

Internet Setup

2.4G Wireless

5G Wireless

Local Network

Local IPv6 Network

Time and Date

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

5G WIRELESS SETUP

Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section will also need to be duplicated to your wireless clients and PC.

Enable wireless☒

WIRELESS BASIC CONFIGURATION

AP Isolate☐

SSID:

Visibility Status : ☒ Visible ☐ Invisible

Country :

802.11 Mode :

Band Width :

Wireless Channel :

WIRELESS SECURITY CONFIGURATION

Wireless Security Mode :

ApplyCancel

Local Network

You can configure the LAN IP address according to the actual application. The preset IP address is 192.168.1.1. You can use the default settings and DHCP service to manage the IP settings for the private network. The IP address of the device is the base address used for DHCP. To use the device for DHCP on your LAN, the IP address pool used for DHCP must be compatible with the IP address of the device. The IP address available in the DHCP IP address pool changes automatically if you change the IP address of the device. You can also enable the secondary LAN IP address. The two LAN IP addresses must be in different networks.

Choose **SETUP > Local Network**. The **Local Network** page is shown as the figure appears on the right.

By default, **Enable DHCP Server** is selected for the Ethernet LAN interface of the device. DHCP service supplies IP settings to workstations configured to automatically obtain IP settings that are connected to the device through the Ethernet port. When the device is used for DHCP, it becomes the default gateway for DHCP client connected to it. If you change the IP address of the device, you must also change the range of IP addresses in the pool used for DHCP on the LAN. The IP address pool can contain up to 253 IP addresses.

Click **Apply** to save the settings.

DSL-2544N

Wizard

Internet Setup

2.4G Wireless

5G Wireless

Local Network

Local IPv6 Network

Time and Date

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

LOCAL NETWORK

This section allows you to configure the local network settings of your router. Please note that this section is optional and you should not need to change any of the settings here to get your network up and running.

ROUTER SETTINGS

Use this section to configure the local network settings of your router. The Router IP Address that is configured here is the IP Address that you use to access the Web-based management interface. If you change the IP Address here, you may need to adjust your PC's network settings to access the network again.

Router IP Address : 192.168.1.1

Subnet Mask : 255.255.255.0

Domain Name : 8192.qacafe.com

DHCP SETTINGS (OPTIONAL)

Use this section to configure the DHCP Relay for your network.

Enable DHCP Relay

Relay IP Address :

Use this section to configure the built-in DHCP Server to assign IP addresses to the computers on your network.

Enable DHCP Server

DHCP IP Address Range : 192.168.1.2 to 192.168.1.254

DHCP Lease Time : 86400 (seconds)

Use the following DNS server addresses:

Enable DNS Relay

Preferred DNS server : 80.58.61.250

Alternate DNS server : 80.58.61.254

Apply Cancel

DHCP RESERVATIONS LIST

Status Computer Name MAC Address IP Address

Add Edit Delete

NUMBER OF DYNAMIC DHCP CLIENTS : 0

Computer Name MAC Address IP Address Expire Time

DHCP SERVER SETTINGS (OPTIONAL)

Use this section to configure the built-in DHCP Server to assign IP addresses to the computers on your network.

Disable DHCP Server

Enable DHCP Server

DHCP IP Address Range : 192.168.1.2 to 192.168.1.254

DHCP Lease Time : 24 (hours)

Apply

In the **Local Network** page, you can assign IP addresses on the LAN to specific individual computers based on their MAC addresses.  
Click **Add** to add static DHCP (optional). The page is shown as the figure appears on the right.

Check the box **Enable** to reserve the IP address for the designated PC with the configured MAC address.  
The Computer Name helps you to recognize the PC with the MAC address. For example, Father’s Laptop.  
Click **Apply** to save the settings.

After the DHCP reservation is saved, the DHCP reservations list displays the configuration.  
If the DHCP reservations list table is not empty, you can select one or more items and click **Edit** or **Delete**.

DHCP RESERVATIONS LIST

| Status | Computer Name | MAC Address | IP Address |
|--------|---------------|-------------|------------|
|--------|---------------|-------------|------------|

Add

Edit

Delete

ADD DHCP RESERVATION (OPTIONAL)

Enable : ☐

Computer Name :

IP Address :

MAC Address :

Apply

Cancel

## Local IPv6 Network

Choose **SETUP > Local IPv6 Network**. The **IPv6 Local Network** page is shown as the figure appears on the right. In this page, you can set an IP address for the DSL IPv6 router, enable the DHCPv6 server, enable RADVD and enable the MLD snooping function.

- **Enable RADVD:** The router advertisement daemon (RADVD) is run by Linux or BSD systems acting as IPv6 routers. It sends router advertisement messages, specified by RFC2461, to a local Ethernet LAN periodically and when requested by a node sending a router solicitation message. These messages are required for IPv6 stateless auto-configuration.
- **Enable DHCPv6 Server:** WIDE-DHCPv6 is an open-source implementation of dynamic host configuration protocol for IPv6 (DHCPv6) originally developed by the KAME project. The implementation mainly complies with the following standards: RFC3315, RFC3319, RFC3633, RFC3646, RFC4075, RFC 4272 etc.
- **LAN Address Config Mode:** Set the mode address obtaining mode of LAN PCs. You may choose **Stateless** or **Stateful**.
- **Start/End Interface ID:** The address pool using DHCPv6 for address assignment under stateful mode.
- **DHCPv6 Lease Time:** The address lease time using DHCPv6 for address assignment under stateful mode.
- **IPv6 DNS Mode**
  - From WAN: DNS is assigned from WAN interface.
  - Manual: Manually enter the DNS.
- **Get Prefix Mode**
  - From WAN: Use the site prefix obtained at the WAN side as the prefix to issue.
  - Manual: Manually add a site prefix.

After setting, click the **Apply** button to save the settings.

The screenshot shows the 'Local IPv6 Network' configuration page for a D-Link DSL-2544N router. The page is divided into several sections: 'IPv6 LAN SETTINGS', 'RADVD CONFIGURATION', 'DHCPV6 CONFIGURATION', and 'PREFIX CONFIGURATION'. The 'IPv6 LAN SETTINGS' section includes a note about stateful DHCPv6 and a field for 'IPv6 Address' set to 'fe80::1'. The 'RADVD CONFIGURATION' section has a checkbox for 'Enable RADVD' which is checked. The 'DHCPV6 CONFIGURATION' section includes a checkbox for 'Enable DHCPv6 Server' (checked), a radio button for 'LAN address config mode' (set to 'Stateless'), and fields for 'Start Interface ID' (1), 'End Interface ID' (ff), 'DHCPv6 Lease Time' (14400), and 'DHCPv6 Valid Time' (86400). It also has a radio button for 'IPv6 DNS Mode' (set to 'From WAN') and a dropdown for 'WAN interface' (set to 'None'). The 'PREFIX CONFIGURATION' section has a radio button for 'Get Prefix Mode' (set to 'From WAN') and a dropdown for 'WAN interface' (set to 'None'). At the bottom, there are 'Apply' and 'Cancel' buttons.

Time and Date

Choose **SETUP > Time and Date**. The page is shown as the figure appears on the right.

In the **Time and Date** page, you can configure, update, and maintain the correct time on the internal system clock. You can set the time zone that you are in and the network time protocol (NTP) server. You can also configure daylight saving to automatically adjust the time when needed.

- Select Automatically synchronize with Internet time servers.
- Select the specific time server and the time zone from the corresponding drop-down lists.
- Select Enable manual Daylight Saving, overwrite automatic rule if necessary. Set the daylight as you want.
- Click **Apply** to save the settings.

DSL-2544N

Wizard

Internet Setup

2.4G Wireless

5G Wireless

Local Network

Local IPv6 Network

Time and Date

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

TIME AND DATE

The Time Configuration option allows you to configure, update, and maintain the correct time on the internal system clock. From this section you can set the time zone that you are in and set the NTP (Network Time Protocol) Server. Daylight Saving can also be configured to automatically adjust the time when needed.

TIME SETTING

☒ Automatically synchronize with Internet time servers

1st NTP time server : ntp.dlink.com.tw

2th NTP time server : ntp1.dlink.com

TIME CONFIGURATION

Current Local Time: 1970-01-01 11:07

Time Zone: (GMT+10:00) Brisbane, Sydney

☒ Automatically adjust clock for daylight saving changes

Daylight Saving Start: 2012 Year 03 Mon 11 Day 02 Hour

Daylight Saving End: 2012 Year 11 Mon 04 Day 02 Hour

Apply

Cancel

Logout

Choose **SETUP > Logout**. The page is shown as the figure appears on the right. In this page, you can log out of the configuration page.

LOGOUT

Logging out will close the browser.

Logout

D-Link DSL-2544N User Manual

28

# ADVANCED

This section includes advanced features used for network management, security and administrative tools to manage the device. You can view status and other information that are used to examine performance and troubleshoot.

## 2.4G Advanced Wireless

This function is used to modify the standard 802.11 wireless radio settings. It is recommended not to change the default settings, because incorrect settings may impair the performance of your wireless radio. The default settings provide the best wireless radio performance in most environments.

Choose **ADVANCED > 2.4G Advanced Wireless**. The page shown as the figure appears on the right. The **2.4G Advanced Settings** includes the sub items **Advanced Settings**, **MAC Filtering**, **Security Settings**, and **WPS Setting**.

|                        |                                                                                            |          |             |        |
|------------------------|--------------------------------------------------------------------------------------------|----------|-------------|--------|
| DSL-2544N              | SETUP                                                                                      | ADVANCED | MAINTENANCE | STATUS |
| 2.4G Advanced Wireless | ADVANCED WIRELESS -- ADVANCED SETTINGS                                                     |          |             |        |
| 5G Advanced Wireless   | Allows you to configure advanced features of the wireless LAN interface.                   |          |             |        |
| ALG                    | Advanced Settings                                                                          |          |             |        |
| Port Forwarding        | ADVANCED WIRELESS -- MAC FILTERING                                                         |          |             |        |
| DMZ                    | Allows you to configure wireless firewall by denying or allowing designated MAC addresses. |          |             |        |
| SAMBA                  | MAC Filtering                                                                              |          |             |        |
| Parental Control       | ADVANCED WIRELESS -- SECURITY SETTINGS                                                     |          |             |        |
| Filtering Options      | Allows you to configure security features of the wireless LAN interface.                   |          |             |        |
| QoS                    | Security Settings                                                                          |          |             |        |
| SPI/DoS Protection     | ADVANCED WIRELESS -- WPS SETTING                                                           |          |             |        |
| DNS                    | Allows you to configure wireless WPS.                                                      |          |             |        |
| Dynamic DNS            | WPS Setting                                                                                |          |             |        |
| Storage Service        |                                                                                            |          |             |        |
| Network Tools          |                                                                                            |          |             |        |
| Routing                |                                                                                            |          |             |        |
| NAT                    |                                                                                            |          |             |        |
| Logout                 |                                                                                            |          |             |        |

## Advanced Settings

In the **2.4G Advanced Wireless** page, click **Advanced Settings**, the page is shown as the figures appear on the right. In this page, you can configure the parameters of wireless LAN clients that may connect to the device.

- **Enable Wireless:** Select the check box to turn the Wi-Fi on.
- **Transmit Power:** Adjust the transmission range here. This tool can be helpful for security purposes if you wish to limit the transmission range.
- **Beacon Interval:** A beacon is a packet of information that is sent from a connected device to all other devices where it announces its availability and readiness. A beacon interval is a period of time (sent with the beacon) before sending the beacon again. The beacon interval may be adjusted in milliseconds (ms). Default (100) is recommended.
- **RTS Threshold:** This value should remain at its default setting of 2347. Should you encounter inconsistent data flow, only minor reductions are recommended. Should you encounter inconsistent data flow, only minor reduction of the default value, 2347, is recommended. If a network packet is smaller than the preset RTS threshold size, the RTS/CTS mechanism will not be enabled. The Router sends Request to Send (RTS) frames to a particular receiving station and negotiates the sending of a data frame. After receiving an RTS, the wireless station responds with a Clear to Send (CTS) frame to acknowledge the right to begin transmission. The RTS Threshold value should remain at its default value of 2347.
- **Fragmentation Threshold:** Packets that are larger than this threshold are fragmented into multiple packets. Try to increase the fragmentation threshold if you encounter high packet error rates. Do not set the threshold too low, since this can result in reduced networking performance.
- **DTIM Interval:** (Delivery Traffic Indication Message) Enter a value between 1 and 255 for the Delivery Traffic Indication Message (DTIM.) A DTIM is a countdown informing clients of the next window for listening to broadcast and multicast messages.
- **SSID:** The Wireless Network Name is a unique name that identifies a network. All devices on a network must share the same wireless network name in order to communicate on the network. If you decide to change the

| DSL-2544N              | SETUP                                                                                        | ADVANCED | MAINTENANCE | STATUS |
|------------------------|----------------------------------------------------------------------------------------------|----------|-------------|--------|
| 2.4G Advanced Wireless | <b>ADVANCED SETTINGS</b>                                                                     |          |             |        |
| 5G Advanced Wireless   | Enable wireless <input checked="" type="checkbox"/>                                          |          |             |        |
| ALG                    | <b>ADVANCED WIRELESS SETTINGS</b>                                                            |          |             |        |
| Port Forwarding        | Transmit Power : 100%                                                                        |          |             |        |
| DMZ                    | Beacon Period : 100 (20 ~ 1023)                                                              |          |             |        |
| SAMBA                  | RTS Threshold : 2346 (1 ~ 2347)                                                              |          |             |        |
| Parental Control       | Fragmentation Threshold : 2346 (256 ~ 2346)                                                  |          |             |        |
| Filtering Options      | DTIM Interval : 10 (1 ~ 255)                                                                 |          |             |        |
| QoS                    | Preamble Type : long                                                                         |          |             |        |
| SPI/DoS Protection     | <b>SSID</b>                                                                                  |          |             |        |
| DNS                    | SSID : D-Link-DSL-2544N                                                                      |          |             |        |
| Dynamic DNS            | Visibility Status : <input checked="" type="radio"/> Visible <input type="radio"/> Invisible |          |             |        |
| Storage Service        | User Isolation : Off                                                                         |          |             |        |
| Network Tools          | Disable WMM Advertise : On                                                                   |          |             |        |
| Routing                | <b>GUEST/VIRTUAL ACCESS POINT-1</b>                                                          |          |             |        |
| NAT                    | Enable <input type="checkbox"/>                                                              |          |             |        |
| Logout                 | Guest SSID : D-Link-DSL-2544N Guest1                                                         |          |             |        |
|                        | Visibility Status : <input checked="" type="radio"/> Visible <input type="radio"/> Invisible |          |             |        |
|                        | User Isolation : On                                                                          |          |             |        |
|                        | Disable WMM Advertise : On                                                                   |          |             |        |
|                        | <b>GUEST/VIRTUAL ACCESS POINT-2</b>                                                          |          |             |        |
|                        | Enable <input type="checkbox"/>                                                              |          |             |        |
|                        | Guest SSID : D-Link-DSL-2544N Guest2                                                         |          |             |        |
|                        | Visibility Status : <input checked="" type="radio"/> Visible <input type="radio"/> Invisible |          |             |        |
|                        | User Isolation : On                                                                          |          |             |        |
|                        | Disable WMM Advertise : On                                                                   |          |             |        |
|                        | <b>GUEST/VIRTUAL ACCESS POINT-3</b>                                                          |          |             |        |
|                        | Enable <input type="checkbox"/>                                                              |          |             |        |
|                        | Guest SSID : D-Link-DSL-2544N Guest3                                                         |          |             |        |
|                        | Visibility Status : <input checked="" type="radio"/> Visible <input type="radio"/> Invisible |          |             |        |
|                        | User Isolation : On                                                                          |          |             |        |
|                        | Disable WMM Advertise : On                                                                   |          |             |        |
|                        | Apply Cancel                                                                                 |          |             |        |

wireless network name from the default setting, enter your new wireless network name in this field.

- **Visibility Status:** You can select **Visible** or **Invisible**.
- **User Isolation:** When many clients connect to the same access point, they can access each other. If you want to disable the access between clients which connect the same access point, you can select **on** to enable this service.
- **Disable WMM Advertise:** After enabling this option, the transmission performance multimedia of the voice and video data can be improved.

Click **Apply** to save the settings.

**MAC Filtering**

In the **2.4G Advanced Wireless** page, click **MAC Filtering**, the page is shown as the figure appears on the right. In this page, it permits access to this route from host with MAC addresses contained in the Access Control List.

Choose a **Wireless SSID** and enable Access Control Mode. Then click **Add** to add a MAC Address as shown in the figure appears on the right.

Click **Apply** to save the settings.

ACCESS CONTROL

Wireless SSID : D-Link DSL-2544N

Access Control Mode : Disable

SubmitCancel

WLAN FILTER LIST

| Mac | Comment | Operation |
|-----|---------|-----------|
| Add |         |           |

INCOMING MAC FILTER

MAC : (xx:xx:xx:xx:xx:xx)

Comment :

ApplyCancel

## Security Settings

In the **Wireless Settings** page, click **Security Settings**. The page is shown as the figure appears on the right. This page allows you to select a security mode. Note that depending on the network authentication that is selected, the page will change accordingly so additional fields can be configured for the specific security mode.

**Select SSID:** Select the SSID that you want to configure from the drop-down list.

For the description of **Work Mode** field, please refer to the description of **Wireless Security Mode** in **2.4G Wireless**.

## WPS Settings

In the **Wireless Settings** page, click **WPS Settings**. The page shown as the figure appears on the right. In this page, you can configure Wi-Fi Protected Setup (WPS).

**Note:** Before you configure WPS, please make sure you have configured the Authentication Type to **WPA**, **WPA2** or **WPA/WPA2**.

The following describes the parameters in this page.

| Field              | Description                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------|
| Wireless SSID      | Name of wireless network                                                                                          |
| WPA Mode           | Set the security type of wireless network.                                                                        |
| Enable WPS         | To enable or disable WPS.                                                                                         |
| Push Button        | Push the <b>PBC</b> button to begin communication.                                                                |
| Input PIN Number   | Enter the station PIN from the wireless client, and then click the <b>PIN</b> button to establish the connection. |
| WPS Session Status | The status of WPS connection.                                                                                     |

If you are using the PIN method, you will need a Registrar (access point/wireless router) to initiate the registration between a new device and an active access


point/wireless router. (Note: The PBC method may also need a Registrar when used in a special case where the PIN is all zeros)  
In order to use the push-button for WPS authentication, you must ensure that the network card support the function. If it supports, you need not to do any configuration. You can press the WPS button directly to enable the WPS function.

5G Advanced Settings

In anti-attenuation capability, the 2.4GHz wireless connection is superior to 5GHz connection, but in signal interference the former is inferior to the latter.  
The 5G wireless configuration parameters are similar that of 2.4GHz. Please refer to **2.4G Advanced Wireless**.

ALG


Select **Advanced Settings > ALG** to go to the following page. Select the NAT ALG and Pass-Through options, and then click **Submit**.

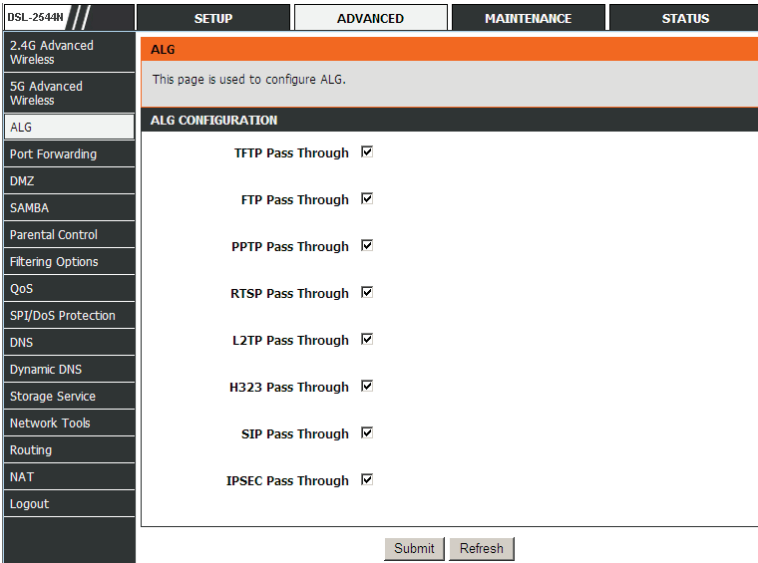

Port Forwarding

This function is used to open ports in your device and re-direct data through those ports to a single PC on your network (WAN-to-LAN traffic). It allows remote users to access services on your LAN, such as FTP for file transfers or SMTP and POP3 for e-mail. The device accepts remote requests for these services at your global IP address. It uses the specified TCP or UDP protocol and port number, and redirects these requests to the server on your LAN with the LAN IP address you specify. Note that the specified private IP address must be within the available range of the subnet where the device is in.

Choose **ADVANCED > Port Forwarding**. The page is shown as the figure appears on the right.

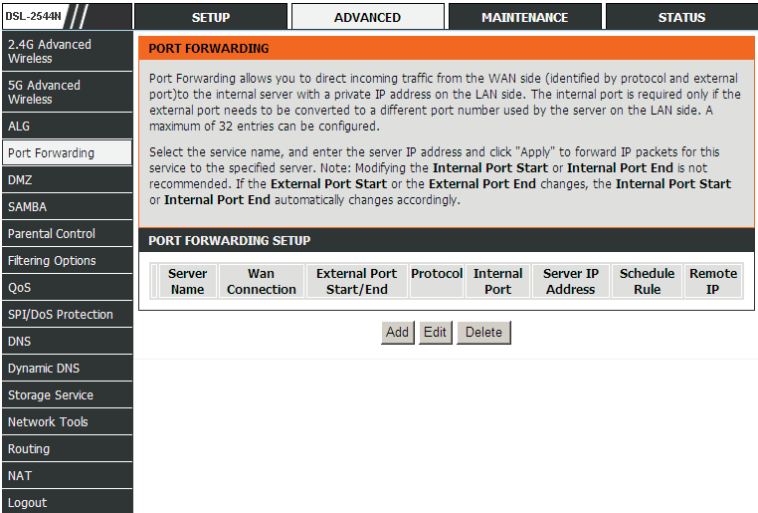

Click **Add** to add a virtual server.

Enter an IP address in the **Server IP Address** field, to appoint the corresponding PC to receive forwarded packets.  
The Ports show the ports that you want to open on the device. The **TCP/UDP** means the protocol type of the opened ports.

Click **Apply** to save the settings.

PORT FORWARDING SETUP

Remaining number of entries that can be configured: 80

WAN Connection(s) :

wan\_8f92

Server Name :

Schedule :

always

Server IP Address(Host Name) :

192.168.1.

| External Port Start | External Port End | Protocol | Internal Port | Remote Ip |
|---------------------|-------------------|----------|---------------|-----------|
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |
|                     |                   | TCP      |               |           |

Apply

Cancel

DMZ

Since some applications are not compatible with NAT, the device supports the use of a DMZ IP address for a single host on the LAN. This IP address is not protected by NAT and it is visible to agents on the Internet with the correct type of software. Note that any client PC in the DMZ is exposed to various types of security risks. If you use the DMZ, take measures (such as client-based virus protection) to protect the remaining client PCs on your LAN from possible contamination through DMZ.

Choose **ADVANCED > DMZ** to go to the following page.

Click **Apply** to save the settings.

DSL-2544N

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

DMZ

The DSL Router will forward IP packets from the WAN that do not belong to any of the applications configured in the Port Forwarding table to the DMZ host computer.  
Enter the computer's IP address and click "Apply" to activate the DMZ host.  
Clear the IP address field and click "Apply" to deactivate the DMZ host.

DMZ HOST

WAN Connection : wan\_892

Enable DMZ : ☐

DMZ Host IP Address :

Apply Cancel

SAMBA

**SAMBA** enables the workstation in the network to share the USB flash disk connected to the router.

Select **ADVANCED > SAMBA**. The page shown in the figure appears on the right.

The following table describes the parameters of this page.

| Field                   | Description                                                                                    |
|-------------------------|------------------------------------------------------------------------------------------------|
| Enable SAMBA            | Select the check box to enable the samba service                                               |
| Workgroup               | Enter the name of your local area network (LAN).                                               |
| Netbios Name            | Enter your netbios name which is an identifier used by netbios services running on a computer. |
| New SMB password        | Enter your samba password for user root.                                                       |
| Retype new SMB password | Reconfirm your samba password here.                                                            |
| Enable USB Storage      | Select the check box to support USB storage.                                                   |
| Enable Anonymous Access | Select the check box to allow anonymous users access.                                          |

DSL-2544N

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

SAMBA

SAMBA SERVER

Enable SAMBA : ☒

Workgroup : Workgroup

Netbios Name : DSL-2544N

modify the password for user root

New SMB password :

Retype new SMB password :

Enable USB Storage : ☒


Enable Anonymous Access : ☒

Apply Cancel

Parental Control


Choose **ADVANCED > Parental Control**. The **Parent Control** page is shown as the figure appears on the right.

This page provides two useful tools for restricting the Internet access. **Block Website** allows you to quickly create a list of all websites that you wish to stop users from accessing. **MAC Filter** allows you to control when clients or PCs connected to the device are allowed to access the Internet.

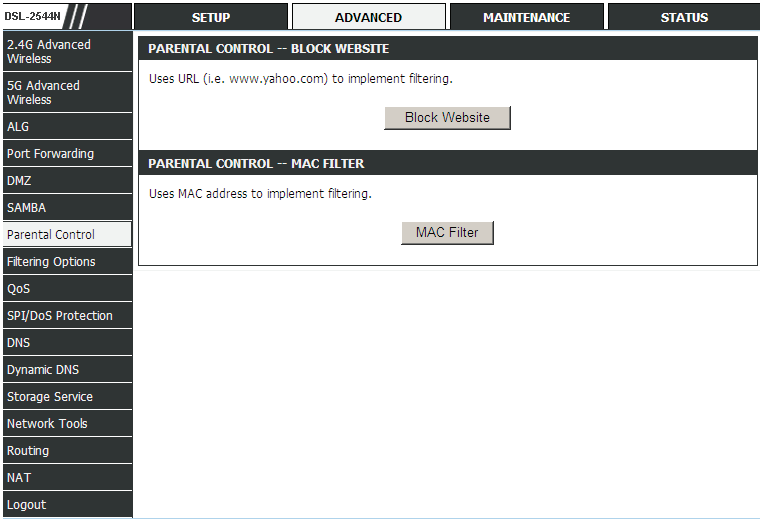

Block Website

In the **Parent Control** page, click **Block Website**. The page is shown as the figure appears on the right.

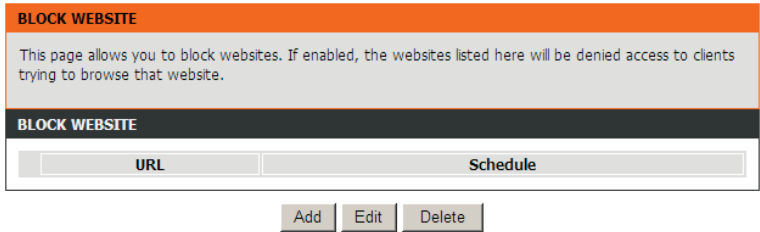

Click **Add**. The page shown in the following page appears.

Enter the website to be blocked in the **URL** field. Select the corresponding time and days when the entered website is blocked.

Click **Apply** to add the website to the **BLOCK WEBSITE** table. The page is shown as the figure appears on the right.

ADD SCHEDULE RULE

URL : http://

Day(s) : ☒ All Week ☐ Select Day(s)

☒ Sun ☒ Mon ☒ Tue ☒ Wed

☒ Thu ☒ Fri ☒ Sat

All Day - 24 hrs : ☒

Start Time : 00 : 00 (hour:minute, 24 hour time)

End Time : 00 : 00 (hour:minute, 24 hour time)

Apply

Cancel

MAC Filter

In the **Parent Control** page, click **MAC Filter**. The page is shown as the figure appears on the right.

BLOCK MAC ADDRESS

Time of Day Restrictions -- A maximum of 16 entries can be configured

This page adds a time of day restriction to a special LAN device connected to the router. The "Current PC's MAC Address" automatically displays the MAC address of the LAN device where the browser is running. To restrict another LAN device, click the "Other MAC Address" button and enter the MAC address of the other LAN device. To find out the MAC address of a Windows-based PC, open a command prompt window and type "ipconfig /all".

Mac Filtering Global Policy:

☒ **BLACK\_LIST** --Allow all packets but **DENY** those matching any of specific rules listed

☐ **WHITE\_LIST** --Deny all packets but **ALLOW** those matching any of specific rules listed

Apply

Cancel

BLOCK MAC ADDRESS--BLACKLIST

| Username | MAC | Schedule |
|----------|-----|----------|
|----------|-----|----------|

Add

Edit

Delete

Click **Add**. The page shown in the following page appears.

Enter the **use name** and **MAC address** and select the corresponding time and days.

Click **Apply** to add the MAC address to the **BLOCK MAC ADDRESS** table.

ADD SCHEDULE RULE

User Name :

☐ Current PC's MACAddress :

44:37:e6:99:43:25

☒ Other MAC Address :

Day(s) :

☒ All Week ☐ Select Day(s)

☒ Sun ☒ Mon ☒ Tue ☒ Wed

☒ Thu ☒ Fri ☒ Sat

All Day - 24 hrs :

☒

Start Time :

00

:

00

(hour:minute, 24 hour time)

End Time :

00

:

00

(hour:minute, 24 hour time)

Apply

Cancel

Filtering Options

Choose **ADVANCED > Filtering Options**. The **Filtering Options** page is shown as the figure appears on the right.

DSL-2544N

SETUP

ADVANCED

MAINTENANCE

STATUS

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

FILTERING OPTIONS -- IP V4 FILTERING

Uses IPv4 address to implement filtering.

IP v4 Filtering

FILTERING OPTIONS -- IP V6 FILTERING

Uses IPv6 address to implement filtering.

IP v6 Filtering

IP v4 Filtering

In the **Filtering Options** page, click **IP v4 Filtering**. The page is shown as the figure appears on the right.

Select a security level, choose a filter direction, and then click **Add a rule** to display the figure appears on the right.

The following table describes the parameters of this page.

| Field                    | Description                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Connection               | Choose an IPv4 WAN connection.                                                                                        |
| Enable                   | Tick in the box to enable a filter rule.                                                                              |
| Protocol                 | Choose a protocol corresponding to the rule. You may choose <b>TCP</b> , <b>UDP</b> , <b>ICMP</b> or <b>TCP/UDP</b> . |
| Source/ Destination IP   | Original/ destination IP address.                                                                                     |
| Source/ Destination Mask | Original/ destination mask.                                                                                           |
| Source/Destination Port  | Original/ end port, which is the original port range.                                                                 |
| Description              | You can describe this IPv4 filter rule.                                                                               |

After setting the parameters, click **Submit**. You can also click **Edit** or **Delete** to manage the rule. Click **Apply** to save the settings.

IP FILTER CONFIGURATION

Enable IP Filter ☒

Security Level 

Low

FILTER MODEL

WAN → LAN 

☒ White ☐ Black

LAN → WAN 

☒ White ☐ Black

Submit

Refresh

ADD IP FILTER RULES

Choose 

WAN → LAN

Add a rule

NO.

Enable

IP/Port(source)

IP/Port(destination)

Protocol

Description

Device Name

Edit

Delete

IP FILTER CONFIGURATION

Connection

Enable ☒

Protocol 

TCP

Source IP

Source Mask

Source Port

Destination IP

Destination Mask

Destination Port

Description

Submit

Refresh

**Note:** The settings only apply when the firewall is enabled.

IP v6 Filtering


The configuration on IP v6 Filtering is similar to that on IP v4 Filtering. For the parameters description, please refer to **IP v4 Filtering**.

QoS

Choose **ADVANCED > QoS**. The **QoS Configuration** page shown in the figure appears on the right.  
The following table describes the parameters of this page.

| Field              | Description                                              |
|--------------------|----------------------------------------------------------|
| QOS                | Choose the box to enable the QOS.                        |
| Direction          | Choose <b>Upstream</b> queue or <b>Downstream</b> queue. |
| Queue Enable       | Tick in the box to enable queue.                         |
| Bandwidth          | Total bandwidth for upstream flow                        |
| Discipline         | Discipline type of QOS                                   |
| WRR weight         | When Discipline was chosen to WRR, you can config WRR    |
| Enable DSCP Mark   | You may tick in the box to permit DSCP Mark.             |
| Enable 802.1P Mark | You may tick in the box to permit 802.1P Mark.           |

After setting the parameters, click **Save** to save the QOS configuration.  
In this page, click **Add Rule**. The page shown in the figure appears on the right.  
You can configure QoS queue rule.

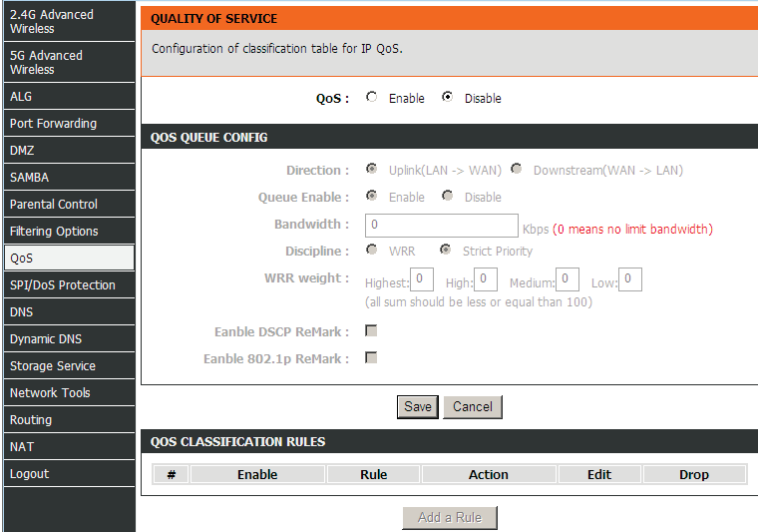

The following table describes the parameters of this page.

| Field                          | Description                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------|
| Classify Type                  | Set the QoS rule type as <b>Upstream</b> or <b>Downstream</b> .                                  |
| Active                         | Tick in the box to enable this QoS rule.                                                         |
| Physical Ports                 | Based on the Classify Type, choose a WAN/LAN interface.                                          |
| Protocol                       | Choose a protocol type matching with the QoS rule.                                               |
| DSCP                           | Choose a matched DSCP type.                                                                      |
| 802.1P                         | Choose a matched 802.1P VLAN priority.                                                           |
| Source/ Destination port range | Input a source port range and a destination port range. For example, input a UDP/TCP port range. |
| DSCP Mark                      | Set a DSCP Mark for this QoS rule.                                                               |

Click **Save** to add the rule to the list. You may click **Edit** to modify the existing classification rule, or click **Drop** to delete it.

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

ADD QoS CLASSIFICATION RULES

RULE

Classify Type : ☐ Upstream Flow Classify ☒ Downstream Flow Classify

Active : ☒ Enable ☐ Disable

Application : 

Not Match

Physical Ports : 

WAN

Destination MAC Address :

Destination IP Address :

Destination Subnet Mask :

Destination Port Range :  ~

Source MAC Address :

Source IP Address :

Source Subnet Mask :

Source Port Range :  ~

Protocol : 

Not Match

Vlan ID :

DSCP : 

Not Set

802.1p : 

Not Match

ACTIONS

DSCP Remark : 

Not Set

802.1p Remark : 

Not Set

Not Set

Queue # : 

Unbound

Save

Back

SPI/DOS Protection

Choose **ADVANCED > SPI/DOS Protection**. The page shown in the figure appears on the right.

A **denial-of-service (DoS) attack** is characterized by an explicit attempt by attackers to prevent legitimate users of a service from using that service. Port scan protection is designed to block attempts to discover vulnerable ports or services that might be exploited in an attack from the WAN. Click **Submit** to save the settings.

DSL-2544N

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

SPI/DOS PROTECTION

This page is used to configure SPI/DoS Protection.

SPI/DOS PROTECTION CONFIGURATION

Enable Anti-Attack ☒

Enable Attack Log ☐

INDIVIDUAL PROTECTION SWITCH

☒ Enable SYN Attack Protection,Max SYN Connections Per Second:

50

(Peer/Second)

☒ Enable Attack Protection Function of Fragglen

☒ Enable Attack Protection Function of Echo Chargen

☒ Enable Attack Protection Function of IP Land

☒ Enable Protection of Anti PortScan

ANTI INVALID PACKETS SWITCH

☒ TCP Flags: Set "SYN FIN"

☒ TCP Flags: Set "SYN RST"

☒ TCP Flags: Set "FIN RST"

☒ TCP Flags: Unset "ACK", Set "FIN"

☒ TCP Flags: Unset "ACK", Set "PSH"

☒ TCP Flags: Unset "ACK", Set "URG"

☒ TCP Flags: Unset "SYN ACK FIN RST URG PSH"

☒ TCP Flags: Set "SYN ACK FIN RST URG PSH"

☒ TCP Flags: Unset "PSH", Set "SYN ACK FIN RST URG"

☒ TCP Flags: Unset "SYN ACK RST URG PSH", Set "FIN"

☒ TCP Flags: Unset "SYN ACK RST", Set "FIN URG PSH"

Submit

Refresh

DNS

Domain name system (DNS) is an Internet service that translates domain names into IP addresses. Because domain names are alphabetic, they are easier to remember. The Internet, however, is actually based on IP addresses. Each time you use a domain name, a DNS service must translate the name into the corresponding IP address. For example, the domain name `www.example.com` might be translated to `198.105.232.4`.

The DNS system is, in fact, its own network. If one DNS server does not know how to translate a particular domain name, it asks another one, and so on, until the correct IP address is returned.

Choose **ADVANCED > DNS**. The page is shown as the figure appears on the right.

If you are using the device for DHCP service on the LAN or using DNS servers on the ISP network, select **IPv4 static DNS** and enter these IP addresses in the available entry fields for the preferred DNS server and the alternate DNS server. Click **Apply** to save the settings.

DSL-2544N

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

DNS

Click "Apply" button to save the new configuration.

DNS SERVER CONFIGURATION

Wan Connection : wan\_8192

IPv4 static DNS: ☐ Enabled

Preferred DNS server :

Alternate DNS server :

Apply

Cancel

Dynamic DNS

The device supports dynamic domain name service (DDNS). The dynamic DNS service allows a dynamic public IP address to be associated with a static host name in any of the many domains, and allows access to a specified host from various locations on the Internet. Click a hyperlinked URL in the form of hostname.dyndns.org and allow remote access to a host. Many ISPs assign public IP addresses using DHCP, so locating a specific host on the LAN using the standard DNS is difficult. For example, if you are running a public web server or VPN server on your LAN, DDNS ensures that the host can be located from the Internet even if the public IP address changes. DDNS requires that an account be set up with one of the supported DDNS service providers (DyndDNS.org or dlinkddns.com).

Choose **ADVANCED > Dynamic DNS**. The page is shown as the following page appears.

Click **Add** to add dynamic DNS. The page is shown as the figure appears on the right.

- **DDNS provider:** Select one of the DDNS registration organizations from the down-list drop.
- **Host Name:** Enter the host name that you registered with your DDNS service provider.
- **Interface:** Select the interface you want to use.
- **Username/Password:** Enter the user name and password for your DDNS account.

Click **Apply** to save the settings.

DSL-2544N

2.4G Advanced Wireless

5G Advanced Wireless

ALG

Port Forwarding

DMZ

SAMBA

Parental Control

Filtering Options

QoS

SPI/DoS Protection

DNS

Dynamic DNS

Storage Service

Network Tools

Routing

NAT

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

DYNAMIC DNS

The Dynamic DNS feature allows you to host a server (Web, FTP, Game Server, etc...) using a domain name that you have purchased (www.xxx.com) with your dynamically assigned IP address. Most broadband Internet Service Providers assign dynamic (changing) IP addresses. Using a DDNS service provider, your friends can enter your host name to connect to your game server no matter what your IP address is.

DYNAMIC DNS

| Hostname | Username | Service | Interface |
|----------|----------|---------|-----------|
|----------|----------|---------|-----------|

Add

Edit

Delete

ADD DYNAMIC DNS

DDNS provider :

dlinkddns.com

Hostname :

Interface :

wan\_8f92

Username :

Password :

Apply

Cancel

Storage Service

Choose **ADVANCED > Storage Service**. The page is shown as the following page appears. Storage service allows you to use storage service with modem to be more easily accessed.

STORAGE DEVICE INFORMATION

The Storage service allows you to use Storage devices with modem to be more easily accessed.

STORAGE DEVICE INFORMATION

| Volumename | FileSystem | Total Space | Used Space |
|------------|------------|-------------|------------|
|------------|------------|-------------|------------|

Network Tools

Port Mapping

Choose **ADVANCED > Network Tools> Port Mapping**, the page shown in the figure appears on the right. In this page, you can bind the WAN interface and the LAN interface to the same group.

PORT MAPPING

Port Mapping -- A maximum 5 entries can be configured

Port Mapping supports multiple port to PVC and bridging groups. Each group will perform as an independent network. To support this feature, you must create mapping groups with appropriate LAN and WAN interfaces using the "Add" button. The "Delete" button will remove the grouping and add the ungrouped interfaces to the Default group.

PORT MAPPING SETUP

| Group Name                    | Interfaces                                                              |
|-------------------------------|-------------------------------------------------------------------------|
| <input type="checkbox"/> Lan1 | ethernet1,ethernet2,ethernet3,ethernet4,ra0,ra1,ra2,ra3,rai0,rai1,ra... |

Add

Edit

Delete

Click **Add** to add port mapping. The page shown in the figure appears on the right.

The procedure for creating a mapping group is as follows:

- Step 1. Enter the group name.
- Step 2. Select interfaces from the Available Interface list and click the <- arrow button to add them to the grouped interface list, in order to create the required mapping of the ports. The group name must be unique.
- Step 3. Click Apply to save the settings.

ADD PORT MAPPING

To create a new mapping group:

1. Enter the Group name and select interfaces from the available interface list and add it to the grouped interface list using the arrow buttons to create the required mapping of the ports. The group name must be unique.
2. Click "Apply" button to make the changes effective immediately.

PORT MAPPING CONFIGURATION

Group Name:

Grouped Interfaces

Available Interfaces

->

<-

ethernet1

ethernet2

ethernet3

ethernet4

ra0

ra1

ra2

ra3

rai0

rai1

Apply

Cancel

IGMP Proxy

Choose **ADVANCED > Network Tools** and click **IGMP Proxy**. The page shown in the figure appears on the right.

IGMP proxy enables the system to issue IGMP host messages on behalf of hosts that the system discovered through standard IGMP interfaces. The system acts as a proxy for its hosts after you enable it.  
Click **Apply** to save the settings.

IGMP PROXY

IGMP proxy enables the system to issue IGMP host messages on behalf of hosts that the system discovered through standard IGMP interfaces. The system acts as a proxy for its hosts when you enable it by:

1. Enabling IGMP proxy on a WAN interface (upstream), which connects to a router running IGMP.
2. Enabling IGMP on a LAN interface (downstream), which connects to its hosts.

IGMP PROXY CONFIGURATION

WAN Interface :

Enable IGMP Proxy : ☐

LAN Connection :

Apply

Cancel

IGMP TABLE

| Group Address | Interface | State |
|---------------|-----------|-------|
|---------------|-----------|-------|

Refresh

D-Link DSL-2544N User Manual

47

IGMP Snooping

Choose **ADVANCED > Network Tools** and click **IGMP Snooping**. The page shown in the figure appears on the right. When IGMP Snooping is enabled, the multicast data only transmits through the specific LAN port which has received the request report. IGMP Snooping applies to IPv4.

IGMP

Transmission of identical content, such as multimedia, from a source to a number of recipients.

IGMP SETUP

Enabled : ☐

Apply

Cancel

MLD Configuration

Choose **ADVANCED > Network Tools** and click **MLD Configuration**. The page shown in the figure appears on the right. This section allows you to configure the MLD setup settings of your router.

The following table describes the parameters of this page.

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enable Mld Proxy    | You can choose to enable MLD proxy.                                                                                                                                                                                                                                                                                                                                           |
| WAN Connection      | Choose an IPv6 WAN connection.                                                                                                                                                                                                                                                                                                                                                |
| Enable MLD Snooping | Multicast Listener Discovery Snooping (MLD Snooping) is an IPv6 multicast constraining mechanism that runs on Layer 2 devices to manage and control IPv6 multicast groups. By analyzing received MLD messages, a Layer 2 device running MLD Snooping establishes mappings between ports and multicast MAC addresses and forwards IPv6 multicast data based on these mappings. |

MLD SETTINGS

MLD PROXY

☐ Enable Mld Proxy

WAN Connection :

MLD SNOOPING

☐ Enable Mld Snooping

Apply

Cancel

UPnP

Choose **ADVANCED > Network Tools** and click **UPnP**. The page shown in the figure appears on the right.

In this page, you can configure universal plug and play (UPnP). The system acts as a daemon after you enable UPnP.  
UPnP is used for popular audio visual software. It allows automatic discovery of your device in the network. If you are concerned about UPnP security, you can disable it. Block ICMP ping should be enabled so that the device does not respond to malicious Internet requests.  
Click **Apply** to save the settings.

UPNP

Universal Plug and Play (UPnP) supports peer-to-peer Plug and Play functionality for network devices.

UPNP SETUP

☒ Enable UPnP

WAN Connection :

LAN Connection : 

br0

Apply

Cancel

ADSL

Choose **ADVANCED > Network Tools** and click **ADSL**. The page shown in the figure appears on the right.

In this page, you can select a DSL mode. Normally, you can keep this factory default setting. The device negotiates the modulation mode with DSLAM.  
Click **Apply** to save the settings.

DSL SETTINGS

This page is used to configure the DSL settings of your DSL router. You need to disable DSL before you change the DSL mode.

DSL SETTINGS

xDSL Mode: 

Auto Sync-Up

xDSL Type: 

ANNEX A/U/J/L/M

Apply

SNMP

Choose **ADVANCED > Network Tools** and click **SNMP**. The page shown in the figure appears on the right. In this page, you can set SNMP parameters.  
  
Click **Apply** to save the settings.

SNMP CONFIGURATION

This page is used to configure the SNMP protocol.

SNMP CONFIGURATION

☐ Enable SNMP Agent

Read Community: 

\*\*\*\*\*

Set Community: 

\*\*\*\*\*

Trap Manager IP:

Trap Community: 

public

Trap Version: 

v2c

Apply

Cancel

TR-069

Choose **ADVANCED > Network Tools** and click **TR069**. The page shown in the figure appears on the right. In this page, you can configure the TR069 CPE.

Click **Apply** to save settings.

TR-069

WAN Management Protocol (TR-069) allows a Auto-Configuration Server (ACS) to perform auto-configuration, provision, collection, and diagnostics to this device.  
Select the desired values and click "Apply" to configure the TR-069 client options.

TR-069 CLIENT -- CONFIGURATION

Cwmp: ☐ Disabled ☒ Enabled

Inform: ☒ Disabled ☐ Enabled

Inform Interval:

ACS URL:

ACS User Name:

ACS Password:

☒ Connection Request Authentication

Connection Request User Name:

Connection Request Password:

Apply

Cancel

Routing

Static Routing

Choose **ADVANCED > Routing** and click **Static Routing**. The page shown in the figure appears on the right. This page is used to configure the routing information. In this page, you can add or delete IP routes.

STATIC ROUTE

Enter the destination network address, subnet mask, gateway AND/OR available WAN interface then click "Apply" to add the entry to the routing table.  
A maximum 30 entries can be configured.

ROUTING -- STATIC ROUTE

| Destination | Subnet Mask | Gateway | Interface |
|-------------|-------------|---------|-----------|
|-------------|-------------|---------|-----------|

Add

Edit

Delete

Click **Add** to add a static route. The page shown in the figure appears on the right.

The following table describes the parameters of this page.

| Field                       | Description                                    |
|-----------------------------|------------------------------------------------|
| Destination Network Address | The destination IP address of the router.      |
| Subnet Mask                 | The subnet mask of the destination IP address. |
| Use Gateway IP Address      | The gateway IP address of the router.          |
| Use Interface               | The interface name of the router output port.  |

IPv6 Static Route

Choose **ADVANCED > Routing** and click **IPv6 Static Route**. The page shown in the figure appears on the right.

Click **Add** to add an IPv6 static route. The page shown in the figure appears on the right.

The following table describes the parameters of this page.

| Field                       | Description                                     |
|-----------------------------|-------------------------------------------------|
| Destination Network Address | The destination IP address of the static route. |
| Use Gateway IP Address      | The gateway IP address of the static route.     |
| Use Interface               | The interface name of the static route.         |

STATIC ROUTE ADD

Destination Network Address :

Subnet Mask :

Use Gateway IP Address :

Use Interface : LAN Group1

Apply

cancel

IPv6 STATIC ROUTE

Enter the destination network address, subnet mask, gateway AND/OR available WAN interface then click "Apply" to add the entry to the routing table.

A maximum 30 entries can be configured.

ROUTING -- IPv6 STATIC ROUTE

Status

Destination

Gateway

Interface

Add

Edit

Delete

IPv6 STATIC ROUTE ADD

Enable : ☐

Destination Network Address :

Use Gateway IP Address :

Use Interface : LAN Group1

Apply

cancel

Policy Route

Choose **ADVANCED > Routing** and click **Policy Route**. The page shown in the figure appears on the right. The policy route binds one WAN connection and one LAN interface.

Click **Add**, and the page shown in the figure appears on the right. Choose one WAN connection and at least one LAN connection to bind together, and then click **Apply** to finish the settings.

POLICY ROUTE

POLICY ROUTE SETUP

WAN

LAN

Add

Delete

WAN INSTANCE AND LAN INSTANCE

WAN Connection

LAN Connection

☐ ethernet1

☐ ethernet2

☐ ethernet3

☐ ethernet4

☐ ra0

☐ ra1

☐ ra2

☐ ra3

☐ ral0

☐ ral1

☐ ral2

☐ ral3

Apply

Cancel

Default Gateway

Choose **ADVANCED > Routing** and click **Default Gateway**. The page is shown as the figure appears on the right.

Select the WAN interface as your default gateway specifies. Click **Apply** to save the settings.

DEFAULT GATEWAY

If Enable Automatic Assigned Default Gateway checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway OR a WAN interface. Click "Apply" button to save it.

DEFAULT GATEWAY

☐ Enable Automatic Assigned Default Gateway

☒ Manual

Use Interface :

Apply

Cancel

**RIP**

Choose **ADVANCED > Routing** and click **RIP**. The page shown in the figure appears on the right. This page is used to select the interfaces on your device that use RIP and the version of the protocol used.

If you are using this device as a RIP-enabled device to communicate with others using the routing information protocol, enable RIP and click **Apply** to save the settings.

RIP CONFIGURATION

To activate RIP for the device, select the "Enabled" checkbox for Global RIP Mode. To configure an individual interface, select the desired RIP version and operation, followed by placing a check in the "Enabled" checkbox for the interface. Click the "Apply" button to save the configuration, and to start or stop RIP based on the Global RIP Mode selected.

RIP

| Interface | Dynamic Route | Direction |
|-----------|---------------|-----------|
| Lan1      | OFF           | Active    |

Apply

Cancel

**RIPng**

Choose **ADVANCED > Routing** and click **RIPng**. The page shown in the figure appears on the right. You can enable or disable dynamic routing of an IPv6 interface after establishing an IPv6 PVC connection.

RIPNG CONFIGURATION

To activate RIPng for the interface, place a check in the "Enabled" checkbox for the interface. Click the "Apply" button to save the configuration, and to start or stop RIPng based on the configuration.

RIPNG

| Interface | VPI/VCI | Enabled |
|-----------|---------|---------|
|-----------|---------|---------|

Apply

Cancel

**NAT**

Traditional NAT would allow hosts within a private network to transparently access hosts in the external network, in most cases. In a traditional NAT, sessions are uni-directional, outbound from the private network. Sessions in the opposite direction may be allowed on an exceptional basis using static address maps for pre-selected hosts.

Choose **ADVANCED > NAT**. The page is shown as the figure appears on the right.

NAT

Traditional NAT would allow hosts within a private network to transparently access hosts in the external network, in most cases. In a traditional NAT, sessions are uni-directional, outbound from the private network. Sessions in the opposite direction may be allowed on an exceptional basis using static address maps for pre-selected hosts.

NAT TABLES

| Name | Internal IP Address | External IP Address |
|------|---------------------|---------------------|
|------|---------------------|---------------------|

Add

Edit

Delete

Click Add to display the following page.

**Entry Name:** the name of the host within the network.

**Internal IP Type:**

- **Single IP:** The special single PC in the internal network is allowed to access the external network.
- **IP Range:** A group of PCs whose IP addresses are in the IP range are allowed to access the external network.

**Internal IP Address:** if Single IP is selected, then you're required to enter the IP address of the PC.

**Start/End Internal IP Address:** if IP Range is selected, then you're required to enter the IP Range.


**External IP Type:**

- **Single IP:** The single IP address the internal PC wants to access.
- **IP Range:** The IP Range that the internal PC wants to access.

**External IP Address:** if Single IP is selected, then you're required to enter the external IP address the internal PC wants to access.

**Start/End Internal IP Address:** if IP Range is selected, then you're required to enter the external IP Range the internal PC wants to access.

After setting, click **Apply** to save the settings.

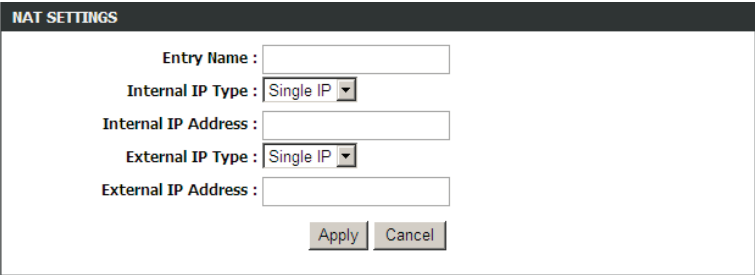


The NAT SETTINGS form contains the following fields and controls:

- Entry Name :
- Internal IP Type :
- Internal IP Address :
- External IP Type :
- External IP Address :
- 

Logout

Choose **ADVANCED > Logout**. The page is shown as the figure appears on the right. In this page, you can log out of the configuration page.

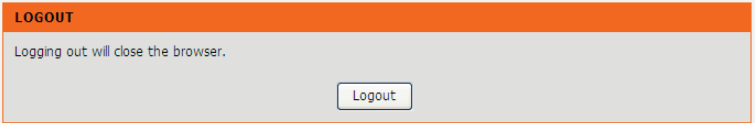

The LOGOUT form contains the following elements:

- Header: LOGOUT
- Text: Logging out will close the browser.
-

# Maintenance

## System


Choose **MAINTENANCE > System**. The **System** page is shown as the figure appears on the right.

In this page, you can reboot device, back up the current settings to a file, update and restore the settings from the file saved previously, and restore the factory default settings.

The buttons in this page are described as follows:

- **Reboot:** Reboot the device.
- **Backup Settings:** Save the settings to the local hard drive. Select a location on your computer to back up the file. You can name the configuration file.
- **Update settings:** Click **Browse** to select the configuration file of device and click **Update Settings** to restore the device configuration.
- **Restore Default Settings:** Reset the device to default settings.

**Notice:** Do not turn off your device or press the **Reset** button while an operation in this page is in progress.

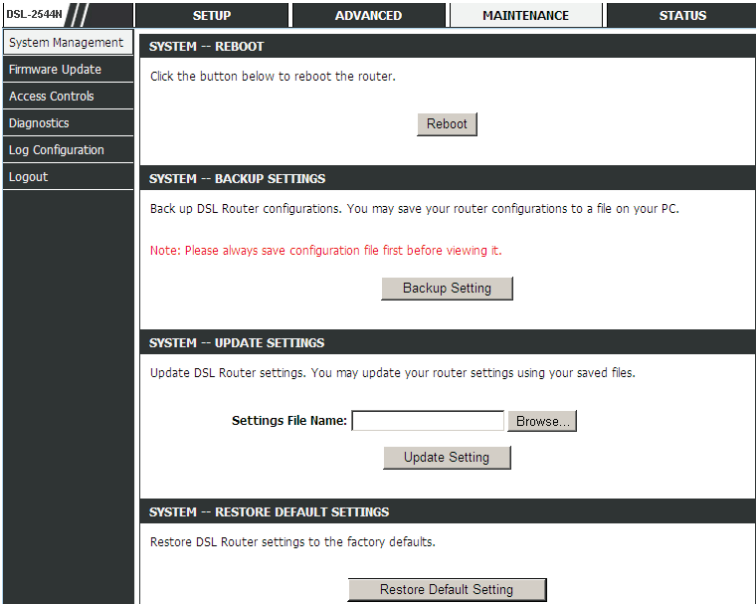

Firmware Update

Choose **MAINTENANCE > Firmware Update**. The page is shown as the figure appears on the right. In this page, you can upgrade the firmware of the device.

The procedures for updating the firmware are as follows:

Step 1 Click **Browse...** to search the file.

Step 2 Select **Click Config**.

Step 3 Click **Update Firmware** to update the configuration file.

The device loads the file and reboots automatically.

**Notice:** Do not turn off your device or press the reset button while this procedure is in progress.

DSL-2544N

System Management

Firmware Update

Access Controls

Diagnostics

Log Configuration

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

FIRMWARE UPDATE

Step 1: Obtain an updated firmware image file from your ISP.

Step 2: Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.

Step 3: Click the "Update Firmware" button once to upload the new image file.

NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot. Please DO NOT power off your router before the update is complete.

FIRMWARE UPDATE

Current Firmware Version: AU\_1.00

Current Firmware Date: 04/08/2013-09:26:55

Select File:

Clear Config: ☐

Access Controls

Account Password

Choose **MAINTENANCE > Access Controls > Account Password**. The page shown as the figure appears on the right. In this page, you can change the password of the user and set time for automatic logout.

It is recommended to change the default password to secure your network. Ensure that you remember the new password or write it down and keep it in a safe and separate location for future reference. If you forget the password, you need to reset the device to the factory default settings and all configuration settings of the device are lost.

Enter the current and new passwords and confirm the new password, to change the password.

Click **Apply** to apply the settings.

ACCOUNT PASSWORD

Access to your DSL Router is controlled through three user accounts: admin, support, and user.

The user name "support" is used to allow an ISP technician to access your DSL Router for maintenance and to run diagnostics. This user name can not be used in local.

The user name "user" can access the DSL Router, view configuration settings and statistics, as well as update the router's firmware.

Use the fields below to enter up to 16 characters and click "Apply" to change or create passwords. Note: Password cannot contain a space.

ACCOUNT PASSWORD

Username: admin

Current Password:

New Password:

Confirm Password:

WEB IDLE TIME OUT SETTINGS

Web Idle Time Out:  (5 ~ 30 minutes)

LACL

Choose **MAINTENANCE > Access Controls > LACL**. The page shown as the figure appears on the right. This page allows you to enable or disable LAN management services. For example, if the Telnet service is enabled on port 23, the remote host can access the router by Telnet through port 23.

Click **Submit** to apply the settings.

**Note:** If you disable HTTP service, you cannot access the configuration page of the device any more.

LOCAL ACCESS CONTROL

Enable Local Access ☒

Choose A Connection 

LAN1

IPv4 ACL

| Service | Enable                              | Source IP | Source Mask | Protocol | Port |
|---------|-------------------------------------|-----------|-------------|----------|------|
| HTTP    | <input checked="" type="checkbox"/> | 0.0.0.0   | 0.0.0.0     | TCP      | 80   |
| ICMP    | <input checked="" type="checkbox"/> | 0.0.0.0   | 0.0.0.0     | ICMP     | -    |
| SNMP    | <input type="checkbox"/>            | 0.0.0.0   | 0.0.0.0     | TCP      | 1050 |
| SSH     | <input type="checkbox"/>            | 0.0.0.0   | 0.0.0.0     | TCP      | 22   |
| TELNET  | <input checked="" type="checkbox"/> | 0.0.0.0   | 0.0.0.0     | TCP      | 23   |
| TFTP    | <input type="checkbox"/>            | 0.0.0.0   | 0.0.0.0     | UDP      | 69   |
| DNS     | <input checked="" type="checkbox"/> | 0.0.0.0   | 0.0.0.0     | UDP      | 53   |
| TR069   | <input checked="" type="checkbox"/> | 0.0.0.0   | 0.0.0.0     | TCP      | 7547 |

Submit Refresh

Remote Access Control

Choose **MAINTENANCE > Access Controls > Remote Access Control**. The page shown as the figure appears on the right. This page allows you to enable or disable WAN management services.

REMOTE ACCESS CONTROL

Choose A Connection

Submit Refresh

IP Address

Choose **MAINTENANCE > Access Controls > Remote Access Control**. The page shown as the figure appears on the right.

In this page, you can configure the IP address for access control list (ACL). If ACL is enabled, only devices with the specified IP addresses can access the device.

**Note:**  
If you enable the ACL, ensure that IP address of the host is in the ACL list.

To add an IP address to the IP list, click **Add**. The page shown in the figure appears on the right.

Click **Apply** to save the settings, and then choose **Enable Access Control Mode** to enable ACL.

IP ADDRESS

The IP Address Access Control mode, if enabled, permits access to local management services from IP addresses contained in the Access Control List. If the Access Control mode is disabled, the system will not validate IP addresses for incoming packets. The services are the system applications listed in the Service Control List.

Enter the IP address of the management station permitted to access the local management services, and click "Apply".

ACCESS CONTROL -- IP ADDRESSES

☐ Enable Access Control Mode

IP

Add

Delete

IP ADDRESS

IP Address :

Apply

Cancel

Diagnostics

DSL Test

Choose **MAINTENANCE > Diagnostic > DSL Test**, the page shown as the figure appears on the right. In this page, you can test your DSL connection.

This page is used to test the connection to your local network, the connection to your DSL service provider, and the connection to your Internet service provider. Click **Rerun Diagnostics Test** to run diagnostics.

DSL DIAGNOSTICS

The DSL router can test your DSL connection. The individual tests are listed below. If a test displays a fail status, click the "Run Diagnostic Test" button again to make sure the fail status is consistent.

WAN Connection

Run Diagnostic Tests

Traceroute

Choose **MAINTENANCE > Diagnostic > Traceroute**, the page shown in the figure appears on the right. In this page, you can determine the routers on the Internet by sending packets.

Click **Traceroute** to begin diagnosis. After finish, the page shown in the figure appears on the right.

TRACEROUTE DIAGNOSTICS

Traceroute diagnostics sends packets to determine the routers on the Internet..

Host : 192.168.1.1

Max TTL : 30 (1-128)

Wait times : 5 (2-60s)

Traceroute

Stop

RESULT

RESULT

Tranceroute Status: Traceroute has finished  
traceroute to 192.168.1.1 (192.168.1.1), 30  
hops max, 38 byte packets  
1 dlink.modem (192.168.1.1) 0.834 ms  
0.597 ms 0.630 ms

Ping

Choose **MAINTENANCE > Diagnostic > Ping**. The page shown in the figure appears on the right. In this page, you can ping the host on the Internet by sending packets.

Click **Ping** to begin diagnosis. After finish, the page shown in the figure appears on the right.

PING DIAGNOSTICS

Host : 192.168.1.1

Number of retries: 5

Timeout: 1

Packet Size: 56

WAN Connection:

Ping...

RESULT

RESULT

Host: 192.168.1.1  
Ping status: pinging...

Log Configuration

Choose **MAINTENANCE > Log Configuration**. The **System Log** page is shown as the figure appears on the right.

This page displays event log data in the chronological manner. You can read the event log from the local host or send it to a system log server. In this page, you can enable or disable the system log function.

To log the events, take the following steps.

- Step 1** Select **Enable Log** check box.
- Step 2** Select the display mode from the **Mode** drop-down list.
- Step 3** Enter the **Server IP Address** and **Server UDP Port** if the **Mode** is set to **Both** or **Remote**.
- Step 4** Click **Apply** to apply the settings.
- Step 5** Click **View System Log** to view the detail information of system log.

DSL-2544N

System Management

Firmware Update

Access Controls

Diagnostics

Log Configuration

Logout

SETUP

ADVANCED

MAINTENANCE

STATUS

SYSTEM LOG

If the log mode is enabled, the system will begin to log all the selected events. If the selected mode is "Remote" or "Both", events will be sent to the specified IP address and UDP port of the remote syslog server. If the selected mode is "Local" or "Both", events will be recorded in the local memory.  
Select the desired values and click "Apply" to configure the system log options.  
Note: This will not work correctly if modem time is not properly set! Please set it in "Setup/Time and Date"

SYSTEM LOG -- CONFIGURATION

☒ Enable Log

Mode : Local

Server IP Address :

Server UDP Port :

Apply

Cancel

View System Log

Logout

Choose **MAINTENANCE > Logout**. The page is shown as the figure appears on the right. In this page, you can log out of the configuration page.

LOGOUT

Logging out will close the browser.

Logout

# Troubleshooting

This chapter provides solutions to problems that might occur during the installation and operation of the DSL-2544N. Read the following descriptions if you are having problems. (The examples below are illustrated in Windows® XP. If you have a different operating system, the screenshots on your computer will look similar to the following examples.)

## 1. How do I configure my DSL-2544N Router without the CD-ROM?

**Step 1** Connect your PC to the Router using an Ethernet cable.

**Step 2** Open a web browser and enter the address `http://192.168.1.1`

**Step 3** The default username is 'admin' and the default password is 'admin'.

**Step 4** If you have changed the password and cannot remember it, you will need to reset the Router to the factory default setting (see question 2), which will set the password back to 'admin'.

**Note:** Please refer to the next section "Networking Basics" to check your PC's IP configuration if you can't see the login windows.

## 2. How do I reset my Router to the factory default settings?

**Step 1** Ensure the Router is powered on.

**Step 2** Press and hold the reset button on the back of the device for approximately 15 seconds.

**Step 3** This process should take around 1 to 2 minutes.

**Note:** Resetting the Router to the factory default settings will erase the current configuration settings. To reconfigure your settings, login to the Router as outlined in question 1, and then run the Quick Setup wizard.

## 3. What can I do if my Router is not working correctly?

There are a few quick steps you can take to try and resolve any issues:

**Step 1** Follow the directions in Question 2 to reset the Router.

**Step 2** Check that all the cables are firmly connected at both ends.

**Step 3** Check the LEDs on the front of the Router. The Power indicator should be on, the Status indicator should flash, and the DSL and LAN

indicators should be on as well.

**Step 4** Please ensure that the settings in the Web-based configuration manager, e.g. ISP username and password, are the same as the settings that have been provided by your ISP.

### 4. Why can't I get an Internet connection?

For ADSL ISP users, please contact your ISP to make sure the service has been enabled/connected by your ISP and that your ISP username and password are correct.

### 5. What can I do if my Router can't be detected by running the installation CD?

**Step 1** Ensure the Router is powered on.

**Step 2** Check that all the cables are firmly connected at both ends and all LEDs are working correctly.

**Step 3** Ensure only one network interface card on your PC is activated.

**Step 4** Click on **Start > Control Panel > Security Center** to disable the firewall.

**Note:** There is a potential security issue if the firewall is disabled on your PC. Please remember to turn it back on once you have finished the whole installation procedure. This will enable you to surf the Internet without any problems.

# Networking Basics

## Check Your IP Address

After you install your new D-Link adapter, by default, the TCP/IP settings should be set to obtain an IP address from a DHCP server (i.e. wireless router) automatically. To verify your IP address, please follow the steps below.


Click on **Start > Run**. In the run box type **cmd** and click on the **OK** button.

At the prompt, type **ipconfig** and press **Enter**.

This will display the IP address, subnet mask and the default gateway of your adapter.

If the address is 0.0.0.0, check your adapter installation, security settings and the settings on your router. Some firewall software programs may block a DHCP request on newly installed adapters.

If you are connecting to a wireless network at a hotspot (e.g. hotel, coffee shop, airport), please contact an employee or administrator to verify their wireless network settings.

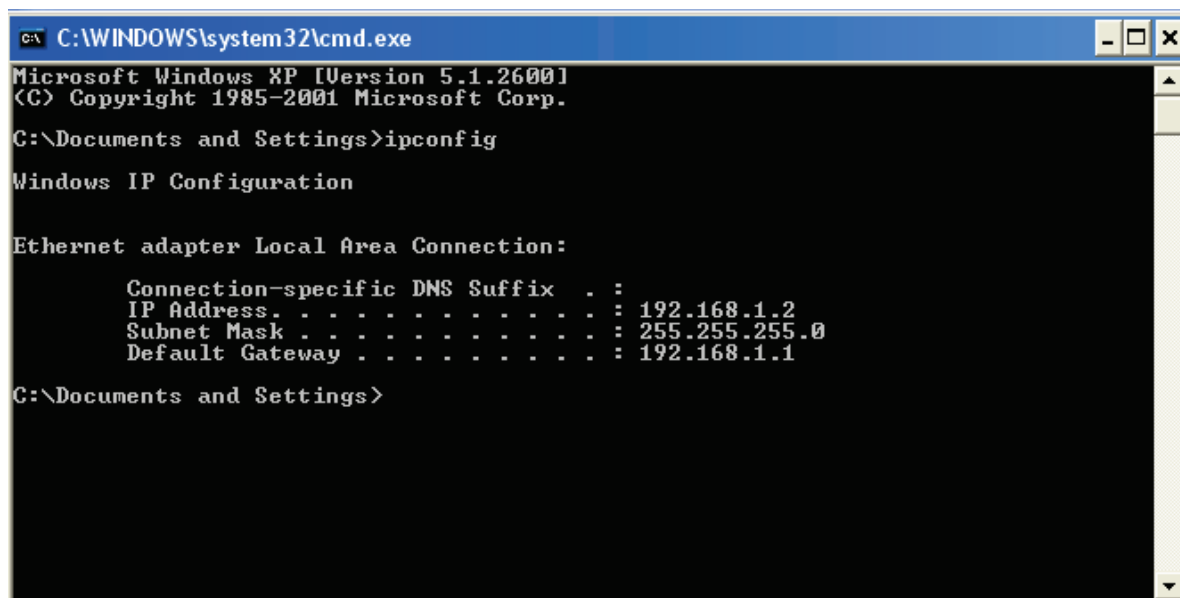

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . .               : 192.168.1.2
    Subnet Mask . . . . .             : 255.255.255.0
    Default Gateway . . . . .         : 192.168.1.1

C:\Documents and Settings>
```

## Statically Assigning an IP Address

If you are not using a DHCP capable gateway/router, or you need to assign a static IP address, please follow the steps below:

### Step 1

Windows® XP - Click on **Start > Control Panel > Network Connections**.

Windows® 2000 - From the desktop, right-click on the **My Network Places > Properties**.

### Step 2

Right-click on the **Local Area Connection** which represents your network adapter and select the **Properties** button.

### Step 3

Highlight **Internet Protocol (TCP/IP)** and click on the **Properties** button.

### Step 4


Click on the **Use the following IP address** and enter an IP address that is on the same subnet as your network or the LAN IP address on your router.

Example: If the router's LAN IP address is 192.168.1.1, make your IP address 192.168.1.X where X is a number between 2 and 254. Make sure that the number you choose is not in use on the network. Set the Default Gateway to be the same as the LAN IP address of your router (192.168.1.1).

Set the Primary DNS to be the same as the LAN IP address of your router (192.168.1.1). The Secondary DNS is not needed or you may enter a DNS server from your ISP.

### Step 5

Click on the **OK** button twice to save your settings.

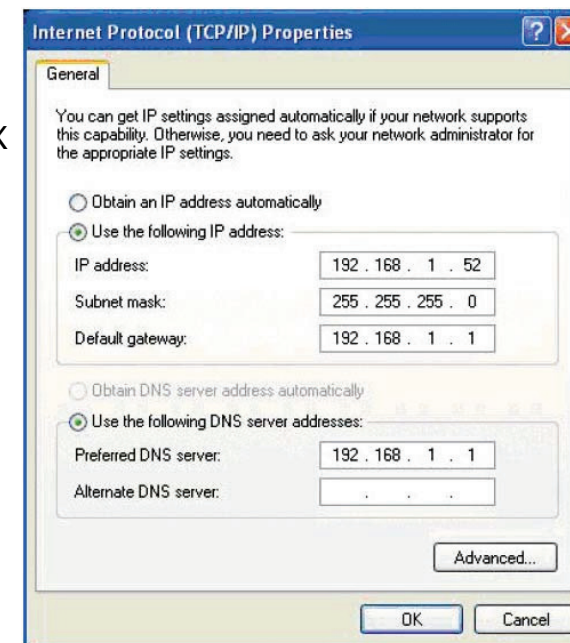

# Technical Specifications

## ADSL Standards

- ☐ ANSI T1.413 Issue 2
- ☐ ITU G.992.1 (G.dmt) AnnexA
- ☐ ITU G.992.2 (G.lite) Annex A
- ☐ ITU G.994.1 (G.hs)
- ☐ ITU G.992.5 Annex A

## ADSL2 Standards

- ☐ ITU G.992.3 (G.dmt.bis) Annex A
- ☐ ITU G.992.4 (G.lite.bis) Annex A

## ADSL2+ Standards

- ☐ ITU G.992.5 (ADSL2+)

## Protocols

- |                                                        |                                                                                                      |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> IEEE 802.1d Spanning Tree     | <input type="checkbox"/> RFC1483/2684 Multiprotocol Encapsulation over ATM Adaptation Layer 5 (AAL5) |
| <input type="checkbox"/> TCP/UDP                       | <input type="checkbox"/> RFC1661 Point to Point Protocol                                             |
| <input type="checkbox"/> ARP                           | <input type="checkbox"/> RFC1994 CHAP                                                                |
| <input type="checkbox"/> RARP                          | <input type="checkbox"/> RFC2131 DHCP Client / DHCP Server                                           |
| <input type="checkbox"/> ICMP                          | <input type="checkbox"/> RFC2364 PPP over ATM                                                        |
| <input type="checkbox"/> RFC1058 RIP v1                | <input type="checkbox"/> RFC2516 PPP over Ethernet                                                   |
| <input type="checkbox"/> RFC1213 SNMP v1 & v2c         |                                                                                                      |
| <input type="checkbox"/> RFC1334 PAP                   |                                                                                                      |
| <input type="checkbox"/> RFC1389 RIP v2                |                                                                                                      |
| <input type="checkbox"/> RFC1577 Classical IP over ATM |                                                                                                      |

## Data Transfer Rate

- ☐ G.dmt full rate downstream: up to 8 Mbps / upstream: up to 1 Mbps
- ☐ G.lite: ADSL downstream up to 1.5 Mbps / upstream up to 512 Kbps
- ☐ G.dmt.bis full rate downstream: up to 12 Mbps / upstream: up to 12 Mbps
- ☐ ADSL full rate downstream: up to 24 Mbps / upstream: up to 1 Mbps

## Media Interface

ADSL interface: RJ-11 connector for connection to 24/26 AWG twisted pair telephone line

LAN interface: RJ-45 port for 10/100BASE-T Ethernet connection