


Outdoor Omni-Directional Antenna

Electrical specification


| | |
|-------------------|------------------|
| Frequency Range | 2400MHz-2500MHz |
| Gain | 12 dBi |
| VSWR | 1.92 : 1 Max. |
| Polarization | Linear; vertical |
| HPBW / horizontal | 360° |
| HPBW / vertical | 6° |
| Power handling | 10W(cw) |
| Impedance | 50 Ohms |
| Connector | N female |

Environmental & Mechanical Characteristics

| | |
|----------------------|-----------------------|
| Survival wind speed | 216 km / hr |
| Temperature | -40°C to + 80°C |
| Humidity | 90%@25°C |
| Lightning protection | DC ground |
| Radome color | White |
| Radome material | Fiberglass |
| Weight | 1.2 kgw |
| Dimensions | 1718 x ϕ 48 (mm) |



Vertical coverage




Horizontal coverage




Wall mounting

- ① Antenna..... 1 pcs
- ② Sticker..... 2 pcs
- ③ Plastic Fixings..... 4 pcs
- ④ Holder..... 2 pcs
- ⑤ Washer 4 pcs
- ⑥ Screw 4 pcs

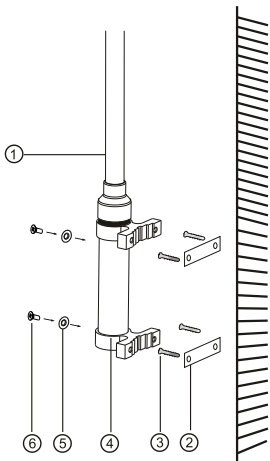

Pole mounting

- ① Antenna..... 1 pcs
- ② Hose Clamp..... 2 pcs
- ③ Holder..... 2 pcs
- ④ Washer 4 pcs
- ⑤ Screw nut 4 pcs

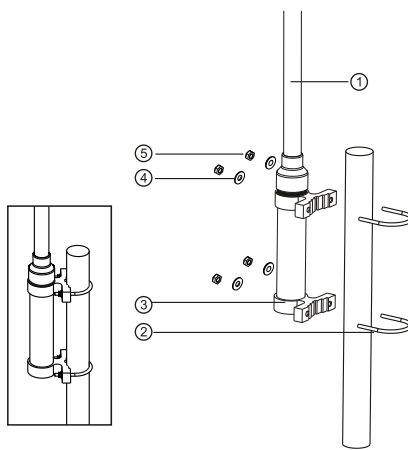


- It can be screwed tightly at any direction.

Package Contents:

- ANT24-1202 Antenna
- 50cm extension cable with N-type to RP-SMA
- Mounting Kit
- Waterproof tape
- Quick Installation Guide

Vertical

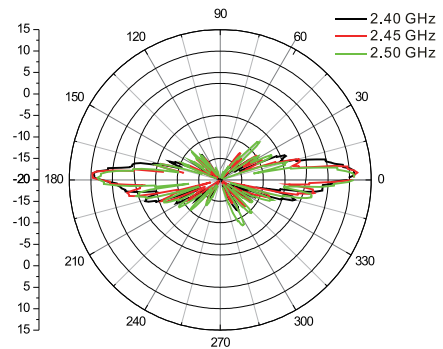

Horizontal

