


APPLICATION

Enhanced performance cable for transmission of high speed data, digital and analogue voice and video (RGB) signals on LANs. Supports Gigabit Ethernet (1000 baseT) standard. Operates at bandwidth of 250MHz.

This cable well exceeds the requirements of ANSI/TIA-568-C.2 category6 ISO 11801 Class E

Approval : UL Listed  & ETL Verified

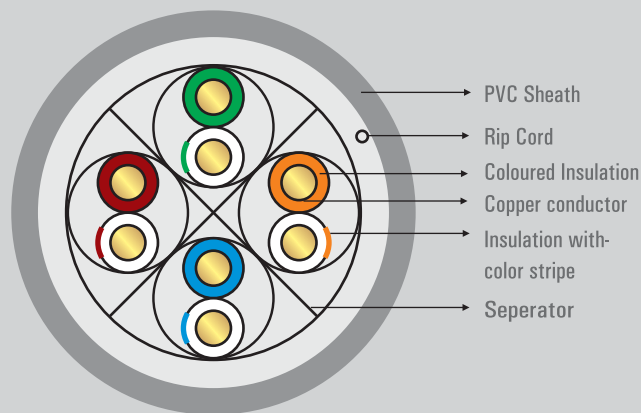

CONSTRUCTION

Conductor:	23 AWG Solid bare Copper (4 pair)
Insulation:	High Density Polyethylene
Pairs:	2 Insulated conductors twisted together
Sheath:	PVC
Cable Diameter:	6.1 mm nominal
Cable wt per Box:	13.6 Kgs nominal
Printing:	Each meter printed with sequential Length Counter

✦ ELECTRICAL PROPERTIES

Characteristic Impedance:	100 ± 15Ω
Conductor Resistance:	≤ 9.38 Ω /100m
Mutual Capacitance:	< 5.6nF/100m
Resistance Unbalance:	5% Max
Capacitance Unbalance:	330pF/100m
Delay Skew:	< 45nS
NVP (%):	69%
Operating Voltage:	72V
Dielectric Strength:	1.0KV dc or 0.75KV ac for 1min



✦ COLOR CODE

PAIR NO	COLOR
1-2	White-Orange Stripe and Orange
4-5	White-Blue Stripe and Blue

PAIR NO	COLOR
3-6	White-Green Stripe and Green
7-8	White-Brown Stripe and Brown

✦ TRANSMISSION CHARACTERISTICS PER 100M

Frequency MHz	Insertion Loss (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	ACR (dB)	PSACR (dB)
1	2.0	20.0	74.3	72.3	67.8	64.8	72.3	70.3
4	3.8	23.0	65.3	63.3	55.8	52.8	61.5	59.5
8	5.3	24.5	60.8	58.8	49.7	46.7	55.5	53.5
10	6.0	25.0	59.3	57.3	47.8	44.8	53.3	51.3
16	7.6	25.0	56.2	54.2	43.7	40.7	48.6	46.6
20	8.5	25.0	54.8	52.8	41.8	38.8	46.3	44.3
25	9.5	24.3	53.3	51.3	39.8	36.8	43.8	41.8
31.25	10.7	23.6	51.9	49.9	37.9	34.9	41.2	39.2
62.5	15.4	21.5	47.4	45.4	31.9	28.9	32.0	30.0
100	19.8	20.1	44.3	42.3	27.8	24.8	24.5	22.5
200	29.0	18.0	39.8	37.8	21.8	18.8	10.8	8.8
250	32.8	17.3	38.3	36.3	19.8	16.8	5.5	3.5

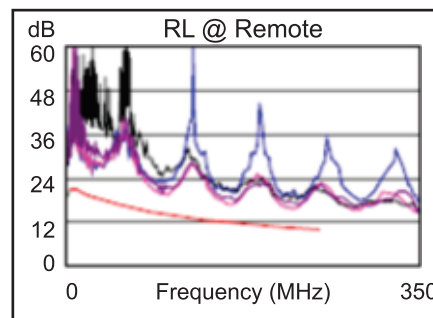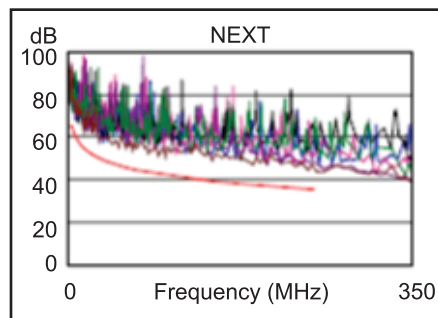

✦ MECHANICAL PROPERTIES

Bending Radius: < 25.4mm at -20°C ± 1°C

Pulling Force: 11.5 Kg

Operating Temperature Range: -20°C to +70°C

Storage Temperature Range: 0°C to +50°C

✦ ORDERING INFORMATION

Part Code	Description
NCB-C6UGRYR-100	CAT6 UTP 23AWG Solid: 100M
NCB-C6UGRYR-305	CAT6 UTP 23AWG Solid: 305M

✦ CONNECTION SYSTEM

Compatible with all common systems according to

TIA/EIA 568-C.2 and ISO/IEC 11801 Class E

✦ PACKING

Reels of guaranteed 305m Length and an outer box containing two boxes of 305mts



D-Link Corporation

No. 289 Xinhua 3rd road, Neihu, taipei 114, taiwan

Specifications are subject to change without notice.

D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.

All other trademarks belong to their respective owners.

©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)