PoE Redundant Power Supply

Uninterrupted Operation

Provides redundancy and resiliency for a variety of power requirements as well as guarantee continuous activity and protection against power supply failures.

DPS-520

Redundant Power Protection

- Cost-effective solution that supports up to four switches
- Provide backup power for switch's built-in power supply
- Over-current protection
- LED status indicators

Convenient Management

- Automatically discover connected PD devices and immediately deliver power
- · Give network administrators the power to define failover policies with RPS port priority
- Stay informed and monitor your devices with status reporting through a web GUI on any Internet browser

Flexible Deployment

- Can be installed as a stand-alone power supply unit or mounted in a 19-inch multi-slot chassis
- Connect to the RPS with a standard CAT-5e cable
- Up to 100 m connection distance















Cost-Effective Solution

Supply 4 devices with redundant power with a single RPS



Power Redundancy


Provide power redundancy to network switches (non-PoE models)



Auto discovery, RPS port priority and status reporting

General	
Hardware Version	A1
Interfaces	4 x 10/100/1000BASE-T PoE ports 1 x 10/100/1000BASE-T MGMT port
Standards	PoH (Power over HDBaseT)
Functionality	
Power Budget	90 W per port 180 W total power budget
Input Voltage Range	90 to 264 V AC
Input Frequency	47 to 63 Hz
Physical	
Dimensions	196 x 257 x 52 mm (7.72 x 10.12 x 2.05 inches) Panel size: 196 x 52 mm (7.7 x 2.04 inches)
Weight	1.51 kg (3.33 lbs)
Operating Temperature	0 to 50 °C (32 to 122 °F)
Storage Temperature	-40 to 70 °C (-40 to 158 °F)
Operating Humidity	10 to 90% RH
Storage Humidity	5 to 95% RH
MTBF	53,858 hours



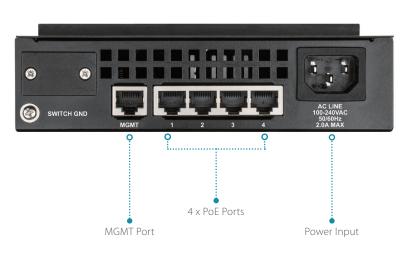

Order Informati	on	/ DPS-520
DPS-520	PoE Redundant Power Supply	
Optional Accessories		
DPS-100	PD Power Connection Box	
DPS-800	2-slot Rack Mount Kit	

