

Product Highlights

Global Mobile Broadband

3G/4G mobile connectivity lets you take your broadband connection with you wherever you go

High-speed Connectivity

Enjoy high-speed wireless IEEE 802.11n with speeds of up to 300 Mbps, even in areas without conventional 802.11 wireless access

Secure Network Sharing

Dual-active firewalls and WPA/WPA2 wireless encryption ensure that your information stays secure



DWR-922

4G LTE Router

Features

Connectivity

- WAN port to connect to broadband Internet
- Four Gigabit LAN ports to connect wired devices for high-speed activities
- Wireless 802.11 b/g/n

Security Features

- WPA/WPA2 encryption to secure your wireless
- 64 / 128-bit WEP to secure your wireless traffic

Firewall

- Network Address Translation (NAT)
- Stateful Packet Inspection (SPI)

Additional Features

- · Voice over IP (VoIP)
- USB 2.0 port

D-Link's DWR-922 4G LTE Router allows you to access worldwide mobile broadband networks from anywhere in the world. Once connected, you can transfer data, stream media, and send SMS messages. Simply insert your USIM card and share your 3G/4G Internet connection through a secure wireless network or by using any of the four Gigabit LAN ports.

Fast Mobile Internet

The 4G LTE Router lets you connect to your 3G/4G mobile connection with fast downlink speeds of up to 100 Mbps and uplink speeds up to 50 Mbps, giving you the speed you need for fast, responsive Internet access. Surf the web with ease and stream music and video over the Internet to your PCs and mobile devices. The router's phone port allows you to attach a handset to make high-quality Voice over IP (VoIP) calls, allowing you to stay in touch wherever your router is located.

Secure Wired and Wireless Connections


The DWR-922 utilizes dual-active firewalls (SPI and NAT) to prevent potential attacks across the Internet. WPA/WPA2 wireless encryption keeps your wireless network secure and your traffic safe, allowing you to securely share your 3G/4G connection without worrying about unauthorized users accessing your network.


Easy to Set Up and Use

Set up your network in minutes; the DWR-922 comes equipped with an easy-to-follow setup wizard to get you up and running right away. Older wireless devices such as 802.11g/b clients are compatible with the 4G LTE Router, helping you get started without issues.





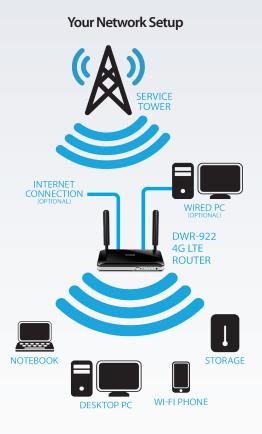

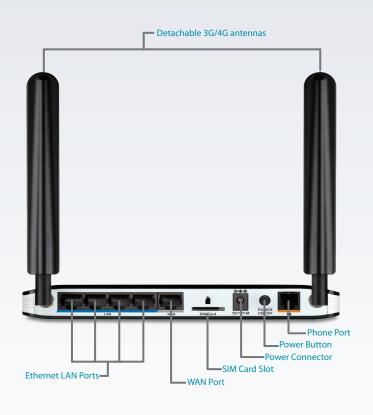

| Technical Specifications | | | |
|------------------------------------|---|--|--|
| General | | | |
| Device Interfaces | Four 10/100/1000 Ethernet LAN ports WAN port (RJ-45) Phone port (RJ11) | Two detachable 3G/4G antennas USB 2.0 port | |
| Data Rates ¹ | Up to 300 Mbps with 802.11n clients 6/9/11/12/18/24/36/48/54 Mbps in 802.11g mode 1/2/5.5/11 Mbps in 802.11b mode | LTE Uplink: Up to 50 Mbps LTE Downlink: Up to 100 Mbps | |
| Standards | 802.11g/b, compatible with 802.11n 802.3 | • 802.3u | |
| GSM Band | • 850/900/1800/1900 MHz | | |
| UMTS/HSDPA/HSUPA Band ² | • 900/2100 MHz | • Power Class 3 | |
| LTE Band | • 800/900/1800/2600 MHz | | |
| Functionality | | | |
| Wireless Security | 64/128-bit WEP (Wired Equivalent Privacy) | WPA & WPA2 (Wi-Fi Protected Access) | |
| Firewall | Network Address Translation (NAT) | Stateful Packet Inspection (SPI) | |
| VPN | L2TP/PPTP/IPSEC VPN passthrough | | |

DWR-922 4G LTE Router

| Physical | | | |
|-----------------------|---|-------------------------------------|--|
| LED Status Indicators | • WAN • LAN • WLAN • 4G | • 3G • SMS • Signal • VoIP | |
| Dimensions | • 190 x 111.5 x 23.5 mm (7.48 x 4.39 x 0.93 inches) | | |
| Weight | • 500 grams (1.10 lb) | | |
| Temperature | • Operating: 0 to 40 °C (32 to 104 °F) | | |
| Humidity | Operating: 10% to 90% non-condensing | | |
| Certifications | • CE | • Wi-Fi Certified | |
| Order Information | | | |
| Part Number | Description | | |
| DWR-922 | 4G LTE Router | | |

 $^{^{\}rm I}$ Data rates are theoretical. Data transfer rate depends on network capacity and signal strength. $^{\rm 2}$ Supported frequency band is dependent upon regional hardware version.

Updated 2014/06/12