

Default IP 192.168.0.1 Username: Admin Password: (blank)



D-Link
Building Networks for People

DI-704P
Ethernet Broadband Router

Home Advanced Tools Status Help

Setup Wizard

The DI-704P is an Ethernet Broadband Router ideal for home networking and small business networking. The setup wizard will guide you to configure the DI-704P to connect to your ISP (Internet Service Provider). The DI-704P's easy setup will allow you to have Internet access within minutes. Please follow the setup wizard step by step to configure the DI-704P.

Run Wizard

Help

Wizard
WAN
LAN
DHCP

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Welcome to the DI-704P Setup Wizard. The Wizard will guide you through these four quick steps. Begin by clicking on **Next**.

- Step 1. Set your new password
- Step 2. Choose your time zone
- Step 3. Set Internet connection
- Step 4. Restart

Next Exit

Done

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Set Password

You may change the admin account password by entering in a new password. Click **Next** to continue.

Old Password

New Password

Reconfirm

Back Cancel Next Exit

Done

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Choose Time Zone


Select the appropriate time zone for your location and click **Next** to continue.

(GMT+09:30) Adelaide, Darwin 

Back Cancel Next Exit

Done

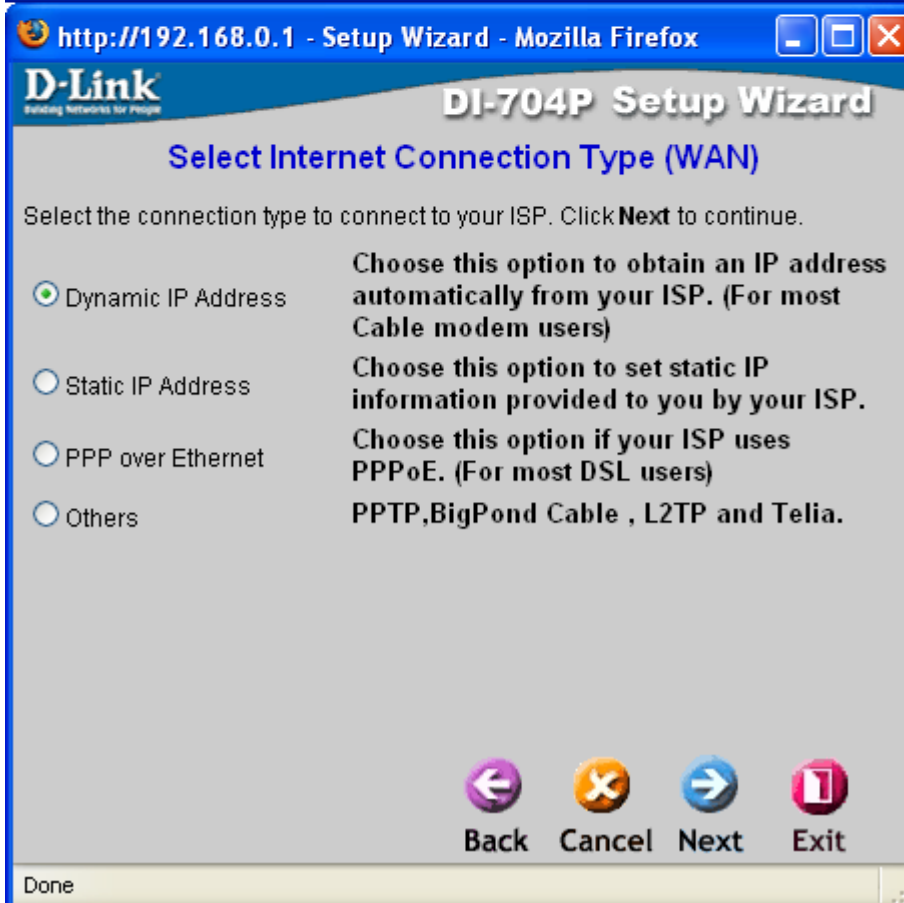

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Set Dynamic IP Address

If your ISP require you to enter a specific host name or specific MAC address, please enter it in. The **Clone MAC Address** button is used to copy the MAC address of your Ethernet adapter to the DI-704P. Click **Next** to continue.

Host Name (optional)

MAC Address - - - - -

Done

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Select Internet Connection Type (WAN)

Select the connection type to connect to your ISP. Click **Next** to continue.

☐ Dynamic IP Address	Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
☒ Static IP Address	Choose this option to set static IP information provided to you by your ISP.
☐ PPP over Ethernet	Choose this option if your ISP uses PPPoE. (For most DSL users)
☐ Others	PPTP, BigPond Cable, L2TP and Telia.

javascript:checkwrt(document.f)

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Set Static IP Address

Enter in the static IP information provided to you by your ISP. Click **Next** to continue.

WAN IP Address

WAN Subnet Mask

WAN Gateway

Primary DNS

Secondary DNS

Back Cancel Next Exit

Done

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Select Internet Connection Type (WAN)

Select the connection type to connect to your ISP. Click **Next** to continue.

☐ Dynamic IP Address	Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
☐ Static IP Address	Choose this option to set static IP information provided to you by your ISP.
☒ PPP over Ethernet	Choose this option if your ISP uses PPPoE. (For most DSL users)
☐ Others	PPTP, BigPond Cable, L2TP and Telia.

Back Cancel Next Exit

Done

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Set PPPoE

The service name is optional but may be required by your ISP. Click **Next** to continue.

PPPoE Account

PPPoE Password

Retype Password

PPPoE Service Name (optional)

Back Cancel Next Exit

Done

http://192.168.0.1 - Setup Wizard - Mozilla Firefox

D-Link
Building Networks for People

DI-704P Setup Wizard

Select Internet Connection Type (WAN)


Select the connection type to connect to your ISP. Click **Next** to continue.

☐ Dynamic IP Address	Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
☐ Static IP Address	Choose this option to set static IP information provided to you by your ISP.
☐ PPP over Ethernet	Choose this option if your ISP uses PPPoE. (For most DSL users)
☒ Others	PPTP, BigPond Cable, L2TP and Telia.

Back Cancel Next Exit

Done

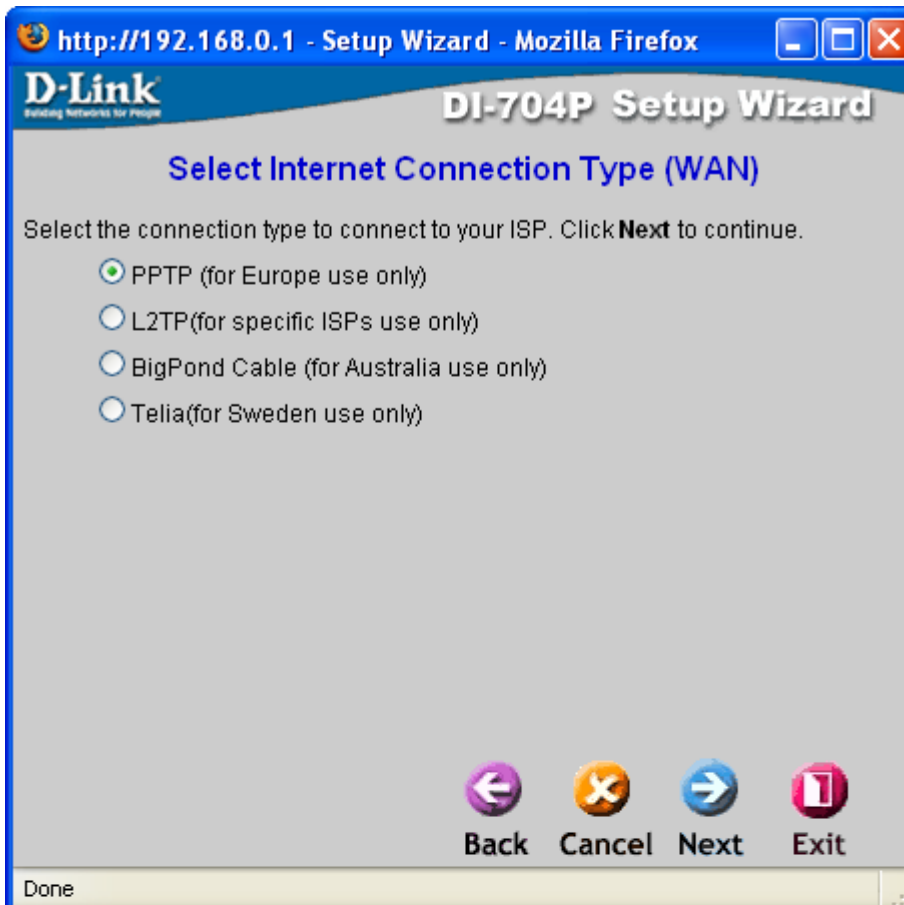

**Wizard****WAN****LAN****DHCP****Home****Advanced****Tools****Status****Help****WAN Settings**

Please select the appropriate option to connect to your ISP.

- ☒ Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- ☐ Static IP Address Choose this option to set static IP information provided to you by your ISP.
- ☐ PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- ☐ Others PPTP , BigPond Cable , L2TP and Telia

Dynamic IP AddressHost Name (optional)MAC Address 00 13 46 56 06 DEPrimary DNS Address 0.0.0.0Secondary DNS Address 0.0.0.0MTU 1500Auto-reconnect ☐ Enabled ☒ DisabledChange the TTL value ☒ Enabled ☐ Disabled**Apply****Cancel****Help****Wizard****WAN****LAN****DHCP****Home****Advanced****Tools****Status****Help****WAN Settings**

Please select the appropriate option to connect to your ISP.

- ☐ Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- ☒ Static IP Address Choose this option to set static IP information provided to you by your ISP.
- ☐ PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- ☐ Others PPTP , BigPond Cable , L2TP and Telia

Static IP AddressIP Address 0.0.0.0Subnet Mask 0.0.0.0ISP Gateway Address 0.0.0.0Primary DNS Address 0.0.0.0Secondary DNS Address 0.0.0.0MTU 1500Change the TTL value ☒ Enabled ☐ Disabled**Apply****Cancel****Help**

[Wizard](#)[WAN](#)[LAN](#)[DHCP](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

WAN Settings

Please select the appropriate option to connect to your ISP.

- ☐ Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- ☐ Static IP Address Choose this option to set static IP information provided to you by your ISP.
- ☒ PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- ☐ Others PPTP , BigPond Cable , L2TP and Telia

PPP over Ethernet

- ☒ Dynamic PPPoE ☐ Static PPPoE
- User Name
- Password
- Retype Password
- Service Name (optional)
- IP Address
- Primary DNS Address
- Secondary DNS Address
- Maximum Idle Time Minutes
- MTU
- Connect mode select ☐ Always-on ☐ Manual ☒ Connect-on-demand
- Change the TTL value ☒ Enabled ☐ Disabled

[Apply](#)[Cancel](#)[Help](#)[Wizard](#)[WAN](#)[LAN](#)[DHCP](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

WAN Settings

Please select the appropriate option to connect to your ISP.

- ☐ Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- ☐ Static IP Address Choose this option to set static IP information provided to you by your ISP.
- ☐ PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- ☒ Others PPTP , BigPond Cable , L2TP and Telia
- ☐ PPTP (for Europe use only)
- ☐ L2TP (for specific ISPs use only)
- ☒ BigPond Cable (for Australia use only)
- ☐ Telia (for Sweden use only)

Dynamic IP Address for BigPond

- User Name
- Password
- Retype Password
- Login Server IP (optional)
- Auto-reconnect ☐ Enabled ☒ Disabled
- Change the TTL value ☒ Enabled ☐ Disabled

[Wizard](#)[WAN](#)[LAN](#)[DHCP](#)[Wizard](#)[WAN](#)[LAN](#)[DHCP](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

LAN Settings

The IP address of the DI-704P .

IP Address

Subnet Mask

Domain Name



Apply



Cancel



Help

[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

DHCP Server

The DI-704P can be setup as a DHCP Server to distribute IP addresses to the LAN network.

DHCP Server

☒ Enabled ☐ Disabled

Starting IP Address

Ending IP Address

Lease Time

Static DHCP

Static DHCP is used to allow DHCP server to assign same IP to specific MAC address.

☐ Enabled ☐ Disabled

Name

IP Address

192.168.0.

MAC Address

 - - - - -

DHCP Client



Apply



Cancel



Help

Static DHCP Clients List

Name	IP Address	MAC Address
------	------------	-------------

Dynamic DHCP Clients List

Host Name	IP Address	MAC Address	Expired Time
dlink-nx8s9uyz	192.168.0.110	00-0A-48-05-19-0F	Wed Dec 21 23:52:00 2005

**Virtual Server****Application****Filter****Firewall****SNMP****DDNS****Routing****DMZ****Home****Advanced****Tools****Status****Help****Virtual Server**

Virtual Server is used to allow Internet users access to LAN services.

☐ Enabled ☐ Disabled

Name

Private IP

192.168.0.

Protocol Type

TCP

Private Port

Public Port

Schedule

☐ Always☐ FromTime : To : day to **Apply****Cancel****Help****Virtual Server List**

Name	Private IP	Protocol	Schedule	
☐ Virtual Server FTP	0.0.0.0	TCP 21 / 21	Always	
☐ Virtual Server HTTP	0.0.0.0	TCP 80 / 80	Always	
☐ Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	Always	
☐ Virtual Server DNS	0.0.0.0	UDP 53 / 53	Always	
☐ Virtual Server SMTP	0.0.0.0	TCP 25 / 25	Always	
☐ Virtual Server POP3	0.0.0.0	TCP 110 / 110	Always	
☐ Virtual Server Telnet	0.0.0.0	TCP 23 / 23	Always	
☐ IPsec	0.0.0.0	UDP 500 / 500	Always	
☐ PPTP	0.0.0.0	TCP 1723 / 1723	Always	
☐ DCS-900,DCS-1000	0.0.0.0	TCP 80 / 80	Always	
☐ DCS-2000,DCS-5300	0.0.0.0	TCP 800 / 800	Always	
☐ DCS-3120	0.0.0.0	UDP 5002-5003 / 5002-5003	Always	

[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Special Application

Special Application is used to run applications that require multiple connections.

☐ Enabled ☐ Disabled

Name

Trigger Port

 -

Trigger Type

Public Ports

Public Type



Apply



Cancel



Help

Special Application List

Name	Trigger	Public Port	
☐ Battle.net	6112	6112	
☐ Dialpad	7175	51200-51201,51210	
☐ ICU II	2019	2000-2038,2050-2051,2069,2085,3010-3030	
☐ MSN Gaming Zone	47624	2300-2400,28800-29000	
☐ PC-to-Phone	12053	12120,12122,24150-24220	
☐ Quick Time	554	6970-6999	

[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Filter

Filters are used to allow or deny LAN users from accessing the Internet.

☒ IP Filters ☐ URL Blocking
☐ MAC Filters ☐ Domain Blocking

IP Filter

Use IP Filters to deny LAN IP addresses access to the Internet.

☐ Enabled ☐ Disabled

IP Address

 -

Port Range

 -

Protocol

Schedule

☐ Always

☐ From

Time : To :
day to



Apply



Cancel



Help

IP Filter List

	IP Range	Port Range	Schedule	
☐	*	TCP 20-21	Always	
☐	*	TCP 80	Always	
☐	*	TCP 443	Always	
☐	*	UDP 53	Always	
☐	*	TCP 25	Always	
☐	*	TCP 110	Always	
☐	*	TCP 23	Always	

[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Filter

Filters are used to allow or deny LAN users from accessing the Internet.

- ☐ IP Filters ☒ URL Blocking
☐ MAC Filters ☐ Domain Blocking

URL Blocking

Block those URLs which contain keywords listed below.

- ☐ Enabled ☒ Disabled

- Empty -



Apply



Cancel



Help

[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Filter

Filters are used to allow or deny LAN users from accessing the Internet.

- ☐ IP Filters ☐ URL Blocking
☒ MAC Filters ☐ Domain Blocking

MAC Filters

Use MAC address to allow or deny computers access to the network.

- ☒ Disabled MAC Filters
☐ Only **allow** computers with MAC address listed below to access the network
☐ Only **deny** computers with MAC address listed below to access the network

Name MAC Address -----DHCP Client 

Apply



Cancel



Help

[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Filter

Filters are used to allow or deny LAN users from accessing the Internet.

- ☐ IP Filters ☐ URL Blocking
☐ MAC Filters ☒ Domain Blocking

Domain Blocking

- ☒ Disabled
☐ **Allow** users to access all domains except "Blocked Domains".

Blocked Domains

- Empty -

[DELETE](#)

- ☐ **Deny** users to access all domains except "Permitted Domains".

Permitted Domains

- Empty -

[DELETE](#)[Apply](#)[Cancel](#)[Help](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Firewall Rules

Firewall Rules can be used to allow or deny traffic from passing through the DI-704P.

- ☐ Enabled ☐ Disabled

Name

Action

- ☐ Allow ☐ Deny

Interface

IP Start

IP End

Protocol

Port Range

Source

*

Destination

*

TCP

 -

Schedule

- ☐ Always

- ☐ From

Time : : To : :
day to

[Apply](#)[Cancel](#)[Help](#)

[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

SNMP

Use Simple Network Management Protocol(SNMP) for DI-704P management purposes.

SNMP Local ☒ Enabled ☐ Disabled

SNMP Remote ☐ Enabled ☒ Disabled

Get Community

Set Community

[Apply](#)[Cancel](#)[Help](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Dynamic DNS

Use Dynamic DNS if you want to use your DDNS account.

DDNS ☒ Disabled ☐ Enabled

Provider

Host Name

Username / E-mail

Password / Key

[Apply](#)[Cancel](#)[Help](#)

[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Routing Table

Use the Routing Table for routing purposes within your local network.

ID	Destination	Subnet Mask	Gateway	Hop	Enable
1					☐
2					☐
3					☐
4					☐
5					☐
6					☐
7					☐
8					☐



Apply



Cancel



Help

[Virtual Server](#)[Application](#)[Filter](#)[Firewall](#)[SNMP](#)[DDNS](#)[Routing](#)[DMZ](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

DMZ

DMZ(Demilitarized Zone) is used to allow a single computer on the LAN to be exposed to the Internet.

☐ Enabled ☒ Disabled

IP Address 192.168.0.



Apply



Cancel



Help

**Admin****Time****System****Firmware****Misc****Admin****Time****System****Firmware****Misc****Home****Advanced****Tools****Status****Help**

Administrator Settings

Administrators can change their login password.

Administrator (The Login Name is "admin")

Old Password

New Password

Reconfirm Password

User (The Login name is "user")

New Password

Reconfirm Password

Remote Management

Let administrator perform administration task from remote host.

☐ Enabled ☒ Disabled

IP Address

Port

**Apply****Cancel****Help****Home****Advanced****Tools****Status****Help**

Time

Set the DI-704P system time.

Device Time : Thu Dec 15 00:19:44 2005

☒ Enable NTP

Default NTP Server (optional)

Time Zone

(GMT+09:30) Adelaide, Darwin

☐ Set Device Date and Time

Year: Month: Day:

Hour: Minute: Second:

Daylight Saving

☐ Enabled ☒ Disabled

Start: End:

**Apply****Cancel****Help**



Admin

Time

System

Firmware

Misc



Admin

Time

System

Firmware

Misc

Home

Advanced

Tools

Status

Help

System Settings

Save Settings To Local Hard Drive

Backup Setting

Load Settings From Local Hard Drive

Browse...

Load

Restore To Factory Default Settings

Reset to Default



Help

Home

Advanced

Tools

Status

Help

Firmware Upgrade

There may be new firmware for your DI-704P to improve functionality and performance.

[Click here to check for an upgrade on our support site.](#)

The upgrade procedure takes about 20 seconds. Note! Do not power off the unit when it is being upgraded. When the upgrade is done successfully, the unit will be restarted automatically.

Current Firmware Version: V3.14

Firmware Date: Thu, Dec 15 2005

Browse...



Apply



Cancel



Help

[Admin](#)[Time](#)[System](#)[Firmware](#)[Misc](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Ping Test

Ping Test is used to send "Ping" packets to test if a computer is on the Internet.

Host Name or IP address

Restart Device

Reboots the DI-704P.

Block WAN Ping

When you "Block WAN Ping", you are causing the public WAN IP address on the DI-704P to not respond to ping commands. Pinging public WAN IP addresses is a common method used by hackers to test whether your WAN IP address is valid.

Discard PING from WAN side ☐ Enabled ☒ Disabled

SPI mode

You can setup this item if you want to enable SPI mode.

☐ Enabled ☒ Disabled

UPnP Setting

You can disable or enable UPnP functions at anytime.

☒ Enabled ☐ Disabled

VPN Pass-Through

Allows VPN connections to work through the DI-704P.

PPTP ☒ Enabled ☐ DisabledIPSec ☒ Enabled ☐ Disabled

Non-standard FTP port

You have to setup this item if you want to access an FTP server whose port number is not 21.

Port:

XBOX Support

You can setup this item if you want to enable XBOX Support

☐ Enabled ☒ Disabled

DoS protection

You can setup this item if you want to enable DoS protection.

☐ Enabled ☒ Disabled

[Device Info](#)[Log](#)[Stats](#)[Active sessions](#)[Device Info](#)[Log](#)[Stats](#)[Active sessions](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Device Information

Firmware Version : V3.14, Thu, Dec 15 2005

LAN

MAC Address 00-13-46-56-06-DF

IP Address 192.168.0.1

Subnet Mask 255.255.255.0

DHCP Server Enabled

WAN

MAC Address 00-13-46-56-06-DE

Connection DHCP Disconnected

[DHCP Renew](#)[DHCP Release](#)

Remaining Lease Time 00:00:00

IP Address 0.0.0.0

Subnet Mask 0.0.0.0

Gateway 0.0.0.0

Domain Name Server 0.0.0.0

Peripheral

Printer Not ready

Device Time : Thu Dec 15 00:23:12 2005

[Help](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

View Log

View Log displays the activities occurring on the DI-704P. Click on Log Settings for advance features.

[First Page](#)[Last Page](#)[Previous](#)[Next](#)[Clear](#)[Log Settings](#)[Help](#)

Page 1/1

WAN Type: Dynamic IP Address (V3.14)

Display time: Thursday December 15, 2005 00:23:44

[Device Info](#)[Log](#)[Stats](#)[Active sessions](#)[Device Info](#)[Log](#)[Stats](#)[Active sessions](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Traffic Statistics

Traffic Statistics display Receive and Transmit packets passing through the DI-704P.

[Refresh](#)[Reset](#)[Help](#)

	Receive	Transmit
WAN	0 Packets	120 Packets
LAN	4785 Packets	6236 Packets

[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Active sessions

Active sessions displays the current status of NAT active sessions on the DI-704P.

[First Page](#)[Last Page](#)[Previous](#)[Next](#)[Refresh](#)[Help](#)

Page 1/1

Internal	Prot.	External	NAT	Time-out
----------	-------	----------	-----	----------

[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

Home

- ◆ [Setup Wizard](#)
- ◆ [WAN Settings](#)
- ◆ [LAN Settings](#)
- ◆ [DHCP Server](#)

Advanced

- ◆ [Virtual Server](#)
- ◆ [Special Applications](#)
- ◆ [Filters](#)
- ◆ [Firewall Rules](#)
- ◆ [SNMP](#)
- ◆ [DDNS](#)
- ◆ [Routing](#)
- ◆ [DMZ](#)

Tools

- ◆ [Administrator Settings](#)
- ◆ [System Time](#)
- ◆ [System Settings](#)
- ◆ [Firmware Upgrade](#)
- ◆ [Miscellaneous Items](#)

Status

- ◆ [Device Information](#)
- ◆ [Log](#)
- ◆ [Traffic Statistics](#)
- ◆ [Active sessions](#)

FAQs