


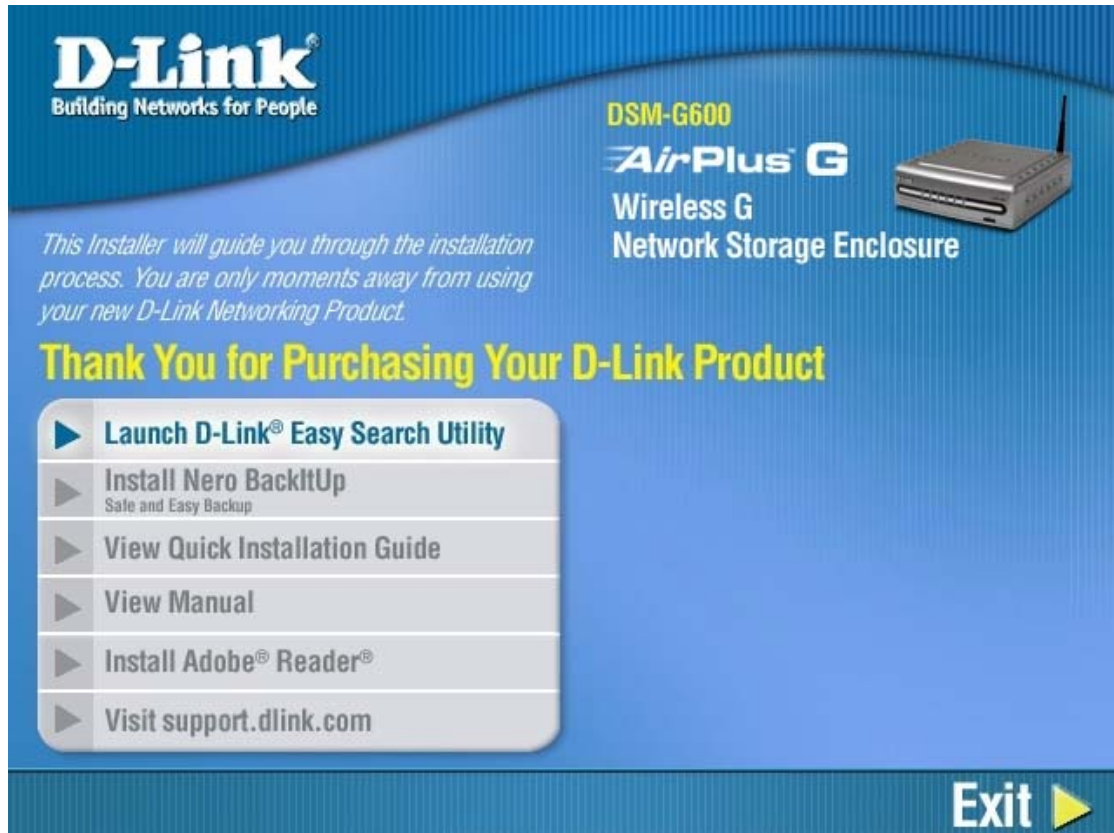

D-Link Easy Search Utility

Adapter

Name	IP	Netmask	Gateway
dlink-122365	192.168.0.10	255.255.255.0	192.168.0.1

Refresh

Configuration

LAN

IP :

Netmask :

Gateway :

DHCP Client :

Apply

Link Info

Link Name	Location

Network Drive :

Connect Disconnect

About Exit



DSM-G600

User Name:

Password:

Download Schedule

Config

Reset

DSM-G600

Logout

Scheduling

Status

Help

Scheduling Settings

Login Method

☐ Account

☒ Anonymous

User Name

Password

Type

File

URL

Test

Local

Save To

Open

When

Date :

11

 /

24

 /

2006

Time :

05

 :

35

Recurring Backup

None

00

 :

00

☐ Incremental Backup (Only for local backup)

✓

✗

+

Apply Cancel Help

Schedule list

Status	Download Path	Save To	Time	Del
--------	---------------	---------	------	-----

+

Refresh Help

DSM-G600

Logout

Scheduling**Status****Help**

Schedule list

Status	%	Speed	Download Path	Save To	Time
--------	---	-------	---------------	---------	------


Refresh Help

DSM-G600

Logout

Scheduling**Status****Help**

Scheduler

- [Scheduler Settings](#)
- [Schedule List](#)

Status

- [Schedule List](#)



DSM-G600

User Name:

Password:

DSM-G600



Logout

Wizard

LAN

Wireless

Device

Home

Advanced

Tools

Status

Help

Setup Wizard

The DSM-G600 Network Storage Enclosure is a useful tool to expand disk storage in home and network environments. The Setup Wizard will let you customize settings for your network.

Run Wizard



Help



DSM-G600 Setup Wizard

Welcome to the DSM-G600 Setup Wizard. The Wizard will guide you through these five quick steps. Begin by clicking on **Next**.

1. Set Password
2. Choose Time Zone
3. Set LAN Connection Type
4. Set Additional Information
5. Set Wireless LAN Connection
6. Restart



Next Exit



Internet



DSM-G600 Setup Wizard

Set Password

You may change the **admin** account password by entering in a new password. Click **Next** to continue.

New Password

Confirm Password



Back Next Exit



DSM-G600 Setup Wizard

Choose Time Zone

Select the appropriate time zone for your location and click **Next** to continue.

(GMT-08:00) Pacific Time (US & Canada):Tijuana ▼



Back Next Exit



Internet



DSM-G600 Setup Wizard

Select LAN Connection Type

Select your connection type and fill out the IP information if necessary.
Click **Next** to continue.

☐ DHCP Client

☒ Static IP

IP Address 192.168.0.10

Subnet Mask 255.255.255.0

Gateway IP Address 192.168.0.1

DNS1 4.2.2.2

DNS2 4.2.2.3



Back Next Exit



Internet



DSM-G600 Setup Wizard

Set Additional Information

Enter your Workgroup, Name, and Description for the dlink-122365. Otherwise you may accept the default names and click **Next** to continue.

Workgroup

Name

Description



Back Next Exit



Internet



DSM-G600 Setup Wizard

Set Wireless LAN Connection

Mode: ☐ Access Point ☒ Client

Wireless ☐ Enable ☒ Disable

Connection Mode ☒ Infrastructure ☐ Ad-Hoc

SSID

Wireless Mode 802.11b/g - 2.4GHz

Security Mode None

Authentication ☒ Open ☐ Shared

Encryption Mode None

Key Format HEX

Default Key Key_1

Key1

Key2

Key3

Key4

Pre-Shared Key



Back Next Exit



DSM-G600 Setup Wizard

Set Wireless LAN Connection

Mode: ☒ Access Point ☐ Client

Wireless ☐ Enable ☒ Disable

SSID

Channel ☐ Auto Select

802.11g Only Mode ☐ Enabled ☒ Disabled

SSID Broadcast ☒ Enabled ☐ Disabled

Security

Authentication ☒ Open ☐ Shared

Encryption Mode

Key Format

Default Key

Key1

Key2

Key3

Key4



Back Next Exit



Connect Refresh Exit




DSM-G600 Setup Wizard

Setup Completed

The Setup Wizard is complete. Click on **Back** to make any changes.
Click **Restart** to save the current settings and restart the dlink-122365.



Back Restart Exit

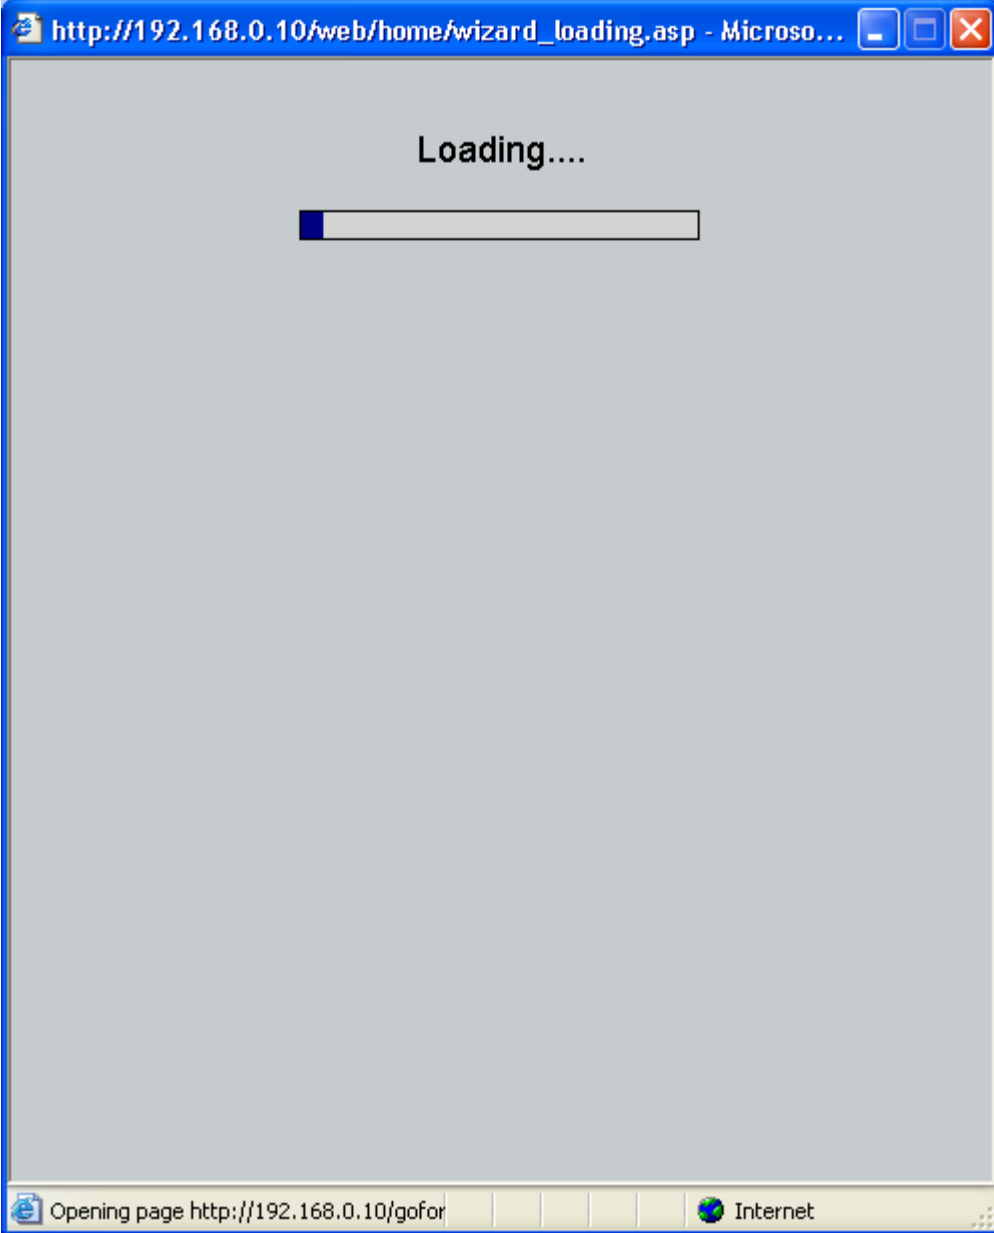

DSM-G600



Logout

Wizard

LAN

Wireless

Device

Home

Advanced

Tools

Status

Help

LAN Settings

Speed 100 M

Link Speed ☒ Auto ☐ 1000

☐ DHCP Client

☒ Static IP

IP Address

Subnet Mask

Gateway IP Address

DNS1

DNS2



Apply Cancel Help

DSM-G600



Logout

Wizard

LAN

Wireless

Device

Home

Advanced

Tools

Status

Help

Wireless Settings

Mode: ☒ Access Point ☐ Client

Wireless ☒ Enable ☐ Disable

SSID

Channel ☐ Auto Select

802.11g Only Mode ☐ Enabled ☒ Disabled

SSID Broadcast ☒ Enabled ☐ Disabled

Security Mode

Authentication Shared

Encryption Mode

Key Format

Default Key

Key1

Key2

Key3

Key4



Apply Cancel Help

DSM-G600



Logout

Wizard

LAN

Wireless

Device

Home

Advanced

Tools

Status

Help

Wireless Settings

Mode: ☐ Access Point ☒ ClientWireless ☒ Enable ☐ DisableConnection Mode ☒ Infrastructure ☐ Ad-Hoc

SSID

Site Survey

Wireless Mode

Security Mode

Authentication

Encryption Mode

Key Format

Default Key

Key1

Key2

Key3

Key4

Pre-Shared Key



Apply Cancel Help

DSM-G600



Logout

Wizard

LAN

Wireless

Device

Home

Advanced

Tools

Status

Help

Device Settings

Workgroup

Name

Description



Apply Cancel Help

DSM-G600



Logout

User

Network
Access

FTP Server

Performance

UPnP AV

DSM-G600



Logout

User

Network
Access

FTP Server

Performance

UPnP AV

Home

Advanced

Tools

Status

Help

User Accounts

User Name

Password

Confirm Password



Apply



Cancel



Help

User List



: Change Password



: Delete

No.	User Name

Home

Advanced

Tools

Status

Help

Network Access Settings

User

Please select a user ☐ All accounts

Path

Authority

Read Only

Comment



Apply



Cancel



Help



: Read/Write



: Read Only



: Modify Setting



: Delete

Share

Path

User

Comment

R/W

HDD_a

HDD_a

Hard Drive / Flash Drive / Single Function CardReader



[Logout](#)[User](#)[Network
Access](#)[FTP Server](#)[Performance](#)[UPnP AV](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

FTP Server Settings

User ☐ All accountsPath ☐ rootAuthority Max User Idle Time (1~10 Minutes)Port (1~65535, Default: 21)Flow Control ☒ Unlimited ☐ x 10 KBsPath ☒ Read/Write ☐ Read Only ☐ Modify Setting ☐ Delete User Name Path

FTP Server Status

Status	Stopped
Port	21
Max User	5
Flow Control	Unlimited
Idle Time	2 Minutes

DSM-G600



Logout

User

Network
Access

FTP Server

Performance

UPnP AV

DSM-G600



Logout

User

Network
Access

FTP Server

Performance

UPnP AV

Home

Advanced

Tools

Status

Help

Wireless Performance

These are the Wireless Performance features for the AP(Access Point) Portion.

TX Rate (Mbps)

Transmit Power

Beacon Interval (msec, range:20~1000, default:100)

RTS Threshold (range: 1~2346, default:2346)

Fragmentation (range: 256~2346, default:2346, even number only)

DTIM Interval (range: 1~255, default:1)

Preamble Type ☐ Short Preamble ☐ Long Preamble ☒ Auto

CTS Mode ☐ None ☐ Always ☒ Auto



Apply Cancel Help

Home

Advanced

Tools

Status

Help

UPnP AV Settings

Path ☒ root

johnson_SHARE



Apply Cancel Help

DSM-G600



Logout

Admin

Time

System

Firmware

Disk Utility

E-Mail Alerts

Home

Advanced

Tools

Status

Help

Administrator's Password

Set the administrator password here.

User Name	admin
Password	
New Password	
Confirm Password	



Apply



Cancel



Help

DSM-G600



Logout

Admin

Time

System

Firmware

Disk Utility

E-Mail Alerts

Home

Advanced

Tools

Status

Help

Time

Set the DSM-G600 system time.

Time 16 : 07 : 29 Date 11 / 27 / 06

Default NTP Server (optional)

Set Time

Set time from my computer.

Set Time

Set the time Month 11 Day 27 Year 2006

Hour 16 Minute 07 Second 23

Set Time

Time Zone (GMT-09:00) Alaska

Daylight Saving Time : None



Apply Cancel Help

[Logout](#)[Admin](#)[Time](#)[System](#)[Firmware](#)[Disk Utility](#)[E-Mail Alerts](#)[Home](#)[Advanced](#)[Tools](#)[Status](#)[Help](#)

System Settings

Restart

System Restart.

Defaults

Restore To Factory Default Settings.

Shutdown

System shutdown.

Configuration Settings

Save Configuration Settings.

Load Configuration Settings.

Idle Time

Config Inactivity Timer

(Minutes)

Download Schedule Inactivity Timer

(Minutes)

[Apply](#) [Cancel](#) [Help](#)

DSM-G600



Logout

Admin

Time

System

Firmware

Disk Utility

E-Mail Alerts

DSM-G600



Logout

Admin

Time

System

Firmware

Disk Utility

E-Mail Alerts

Home

Advanced

Tools

Status

Help

Firmware Upgrade

Please check the support site at <http://support.dlink.com.tw> for new firmware update.

How to update firmware:

1. Download and Save the firmware from our support site.
2. Click on the "Browse" button to select the path of the new firmware.
3. Click on "Apply"

Current Firmware Version : 1.02

Firmware Date : 10/19/2006

File path

Browse...



Apply



Cancel



Help

Home

Advanced

Tools

Status

Help

Disk Utility

Format

Format hard disk drive.

Disk

Please select a disk ▼

File System

EXT2 ▼

Format

Scan Disk

Disk

Please select a disk ▼

☐ All disks ☐ Fix

Scan Disk



Help

DSM-G600



Logout

Admin

Time

System

Firmware

Disk Utility

E-Mail Alerts

Home

Advanced

Tools

Status

Help

E-Mail

Email Notification Settings:

Login Method ☒ Account ☐ Anonymous

User Name

Password

SMTP Server

Sender Email

Receiver Email

Send Notification:

☐ Space Status Interval: (Hours) (Minutes)

☐ Disk Full

☐ Hard Drive Failure

☐ Administrator Password Changed

☐ Firmware Upgraded

☐ Internal Hard Drive Temperature exceed °F

Test E-Mail



Apply



Cancel



Help

DSM-G600



Logout

Device Info

Home

Advanced

Tools

Status

Help

Device Information

LAN Info

IP Address: 10.0.0.13

Subnet Mask: 255.0.0.0

Gateway IP Address: 10.0.0.32

Device Info

Workgroup: workgroup

Name: johnson

Description: Network Storage Enclosure

Wireless Info

Mode: Station

SSID: OFF

Wireless IP Address: OFF

Channel: OFF

HD Info

Device Name: HDD_a

Total Disk Size: 7763888 KB

Used Space: 1026500 KB

Disk Size Remaining: 6737388 KB

Temperature: Not Supported.

Network Access List

Path	Permissions	Access Control
HDD_a	Read/Write	Open mode



Help

DSM-G600



Logout

Home

Advanced

Tools

Status

Help

Home

- [Setup Wizard](#)
- [LAN](#)
- [Device](#)
- [Wireless](#)

Advanced

- [User Accounts](#)
- [Network Access](#)
- [FTP Server Settings](#)
- [Performance](#)
- [UPnP AV](#)

Tools

- [Administrator's Password](#)
- [System Time](#)
- [System Settings](#)
- [Firmware Upgrade](#)
- [Disk Utility](#)
- [E-mail Alert](#)

Status

- [Device Information](#)