

DWL-7700AP B1 fw 3.10r0112 Screen Captures

Connect to 192.168.0.50



DWL-7700AP

User name:

admin

Password:

☐Remember my password

OK

Cancel



802.11A/G Outdoor Wireless AP/Bridge

Home

Tool

Configuration

System

Logout

Help

DWL-7700AP

Basic Settings

Advanced Settings

Status

System Information

Model Name	DWL-7700AP
System Time	Not Available
Up Time	0 day, 16:45:20
Firmware Version	v3.10
IP address	192.168.0.50

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band: IEEE 802.11a

Mode: Access Point

Wireless Network Name (SSID): 7700APA

SSID Broadcast: Enable

Channel: 149 5.745 GHz ☐ Auto Channel Scan

Authentication: Open System

Key Settings

Encryption: ☒ Disable ☐ Enable

Key Type: ASCII Key Size: 128 Bits

Valid Key: First

First Key:

Second Key:

Third Key:

Fourth Key:

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band: IEEE 802.11a

Mode: Access Point

Wireless Network Name (SSID): Access Point

SSID Broadcast: WDS with AP

Channel: 149 5.745 GHz ☐ Auto Channel Scan

Authentication: Open System

Key Settings

Encryption: ☒ Disable ☐ Enable

Key Type: ASCII Key Size: 128 Bits

Valid Key: First

First Key:

Second Key:

Third Key:

Fourth Key:

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band: IEEE 802.11a

Mode: Access Point

Wireless Network Name (SSID): 7700APA

SSID Broadcast: Enable

Channel: 149 5.745 GHz ☐ Auto Channel Scan

Authentication: Open System

Key Settings

Encryption: ☒ Disable

Key Type: ASCII

Valid Key: First

First Key:

Second Key:

Third Key:

Fourth Key:

Open System
Shared Key
Open System/Shared Key
WPA-Enterprise
WPA-Personal
WPA2-Enterprise
WPA2-Personal
WPA-Auto-Enterprise
WPA-Auto-Personal
802.1x

28 Bits

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band: IEEE 802.11a

Mode: Access Point

Wireless Network Name (SSID): 7700APA

SSID Broadcast: Enable

Channel: 149 5.745 GHz ☐ Auto Channel Scan

Authentication: Open System

Key Settings

Encryption: ☐ Disable ☒ Enable

Key Type: ASCII

Valid Key: HEX

Key Size: 128 Bits

First Key

Second Key:

Third Key:

Fourth Key:

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band IEEE 802.11a
Mode Access Point
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan
Authentication WPA-Enterprise

RADIUS Server Settings

Cipher Type AES Group Key Update Interval 1800 Sec
RADIUS Server
RADIUS Port 1812
RADIUS Secret
Accounting Mode Disable
Accounting Server
Accounting Port 1813

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band IEEE 802.11a
Mode Access Point
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan
Authentication WPA-Enterprise

RADIUS Server Settings

Cipher Type AES Group Key Update Interval 1800 Sec
RADIUS Server
RADIUS Port
RADIUS Secret
Accounting Mode Disable
Accounting Server
Accounting Port 1813

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band

Mode

Wireless Network Name (SSID)

SSID Broadcast

Channel 5.745 GHz ☐ Auto Channel Scan

Authentication

PassPhrase Settings

Cipher Type Group Key Update Interval Sec

PassPhrase

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band

Mode

Wireless Network Name (SSID)

SSID Broadcast

Channel 5.745 GHz ☐ Auto Channel Scan

Authentication

RADIUS Server Settings

Cipher Type Group Key Update Interval Sec

RADIUS Server

RADIUS Port

RADIUS Secret

Accounting Mode

Accounting Server

Accounting Port

Apply

DWL-7700AP

Basic Settings

Wireless

LAN

Advanced Settings

Status

Device Information

Indication

Client Information

WDS Information

Stats

Log

Wireless Settings

Wireless Band

Mode

Wireless Network Name (SSID)

SSID Broadcast

Channel ☐ Auto Channel Scan

Authentication

PassPhrase Settings

Cipher Type Group Key Update Interval Sec

PassPhrase

Apply

DWL-7700AP

Basic Settings

Wireless

LAN

Advanced Settings

Status

Device Information

Indication

Client Information

WDS Information

Stats

Log

Wireless Settings

Wireless Band

Mode

Wireless Network Name (SSID)

SSID Broadcast

Channel ☐ Auto Channel Scan

Authentication

RADIUS Server Settings

Cipher Type Group Key Update Interval Sec

RADIUS Server

RADIUS Port

RADIUS Secret

Accounting Mode

Accounting Server

Accounting Port

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band: IEEE 802.11a
Mode: Access Point
Wireless Network Name (SSID): 7700APA
SSID Broadcast: Enable
Channel: 149 5.745 GHz ☐ Auto Channel Scan
Authentication: WPA-Auto-Personal

PassPhrase Settings

Cipher Type: AES
Group Key Update Interval: 1800 Sec
PassPhrase:
AES
TKIP

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Wireless Settings

Wireless Band: IEEE 802.11a
Mode: Access Point
Wireless Network Name (SSID): 7700APA
SSID Broadcast: Enable
Channel: 149 5.745 GHz ☐ Auto Channel Scan
Authentication: 802.1x

802.1x Settings

Encryption: ☐ Disable ☒ Enable
WEP Key Type: ☒ Static ☐ Dynamic
Key Type: ASCII Key Size: 128 Bits
Valid Key: First
First Key:
Second Key:
Third Key:
Fourth Key:
Cipher Type: WEP
RADIUS Server: WEP
RADIUS Port: 1812
RADIUS Secret:
Accounting Mode: Disable
Accounting Server:
Accounting Port: 1813

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

Basic SettingsWirelessLANAdvanced SettingsStatus

Wireless Settings

Wireless BandIEEE 802.11a

ModeWDS with AP

Wireless Network Name (SSID)7700APA

SSID BroadcastEnable

Channel1495.745 GHzAuto Channel Scan

WDS with AP

Remote AP MAC Address

1.00:15:e9:c1:d7:602.3.4.5.6.7.8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID
------	----	--------	-------	----------	------

AuthenticationOpen SystemOpen SystemShared KeyOpen System/Shared KeyWPA-PersonalWPA2-PersonalWPA-Auto-Personal

Key Settings

EncryptionDisable

Key TypeASCIIKey Size28 Bits

Valid KeyFirst

First Key

Second Key

Third Key

Fourth Key

Apply

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

Basic SettingsWirelessLANAdvanced SettingsStatus

Wireless Settings

Wireless BandIEEE 802.11a

ModeWDS with AP

Wireless Network Name (SSID)7700APA

SSID BroadcastEnable

Channel1495.745 GHzAuto Channel Scan

WDS with AP

Remote AP MAC Address

1.00:15:e9:c1:d7:602.3.4.5.6.7.8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID
------	----	--------	-------	----------	------

AuthenticationOpen System

Key Settings

EncryptionDisableEnable

Key TypeASCIIKey Size128 Bits64 Bits128 Bits152 Bits

Valid KeyFirst

First Key

Second Key

Third Key

Fourth Key

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band IEEE 802.11a
Mode WDS with AP
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan

WDS with AP

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication WPA-Personal

PassPhrase Settings

Cipher Type AUTO Group Key Update Interval 1800 Sec
PassPhrase AES

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band IEEE 802.11a
Mode WDS with AP
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan

WDS with AP

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication WPA2-Personal

PassPhrase Settings

Cipher Type AUTO Group Key Update Interval 1800 Sec
PassPhrase AES

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band IEEE 802.11a
Mode WDS with AP
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan

WDS with AP

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication WPA-Auto-Personal

PassPhrase Settings

Cipher Type AUTO Group Key Update Interval 1800 Sec
PassPhrase AES

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band IEEE 802.11a
Mode WDS
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan

WDS

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication WPA-Auto-Personal

PassPhrase Settings

Cipher Type AES
PassPhrase password

Apply

802.11A/G Outdoor Wireless AP/Bridge

Home
Tool
Configuration
System
Logout
Help

DWL-7700AP

- Basic Settings
- Wireless
- LAN
- Advanced Settings
- Status

Wireless Settings

Wireless Band: IEEE 802.11a

Mode: WDS

Wireless Network Name (SSID): 7700APA

SSID Broadcast: Enable

Channel: 149 5.745 GHz ☐ Auto Channel Scan

[WDS](#)

Remote AP MAC Address

1.	00:15:e9:c1:d7:60	2.		3.		4.	
5.		6.		7.		8.	

[Site Survey](#)

Type	CH	Signal	BSSID	Security	SSID
Scan					

Authentication: Open System

[Key Settings](#)

Encryption: ☐ Disable ☒ Enable

Key Type: ASCII Key Size: 128 Bits

Valid Key: First

First Key:

Second Key:

Third Key:

Fourth Key:

Apply

802.11A/G Outdoor Wireless AP/Bridge

Home
Tool
Configuration
System
Logout
Help

DWL-7700AP

- Basic Settings
- Wireless
- LAN
- Advanced Settings
- Status

Wireless Settings

Wireless Band: IEEE 802.11a

Mode: WDS

Wireless Network Name (SSID): 7700APA

SSID Broadcast: Enable

Channel: 149 5.745 GHz ☐ Auto Channel Scan

[WDS](#)

Remote AP MAC Address

1.	00:15:e9:c1:d7:60	2.		3.		4.	
5.		6.		7.		8.	

[Site Survey](#)

Type	CH	Signal	BSSID	Security	SSID
Scan					

Authentication: WPA-Personal

[PassPhrase Settings](#)

Cipher Type: AES Group Key Update Interval: 1800 Sec

PassPhrase: AES password

Apply

DWL-7700AP

Basic Settings

Wireless

LAN

Advanced Settings

Status

Wireless Settings

Wireless Band IEEE 802.11a
Mode WDS
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan

WDS

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication WPA2-Personal

PassPhrase Settings

Cipher Type AES Group Key Update Interval 1800 Sec
PassPhrase AES password

Apply

DWL-7700AP

Basic Settings

Wireless

LAN

Advanced Settings

Status

Wireless Settings

Wireless Band IEEE 802.11a
Mode WDS
Wireless Network Name (SSID) 7700APA
SSID Broadcast Enable
Channel 149 5.745 GHz ☐ Auto Channel Scan

WDS

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication WPA-Auto-Personal

PassPhrase Settings

Cipher Type AES Group Key Update Interval 1800 Sec
PassPhrase AES password

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band: IEEE 802.11g

Mode: Access Point

Wireless Network Name (SSID): 7700APG

SSID Broadcast: Enable

Channel: 1 2.412 GHz ☐ Auto Channel Scan

Authentication: Open System

Key Settings

Encryption: ☐ Disable ☐ Enable

Key Type: HEX

Valid Key: First

First Key:

Second Key:

Third Key:

Fourth Key:

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band: IEEE 802.11g

Mode: WDS with AP

Wireless Network Name (SSID): 7700APG

SSID Broadcast: Enable

Channel: 1 2.412 GHz ☐ Auto Channel Scan

WDS with AP

Remote AP MAC Address

1. 00:15:e9:c1:d7:60 2. 3. 4. 5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID
☐ AP BSS	1	18%	00:15:e9:c1:d7:60	WPA-Personal	7700APG

Authentication: WPA-Personal

PassPhrase Settings

Cipher Type: AUTO

PassPhrase: password

1800 Sec

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

Wireless Settings

Wireless Band

Mode

Wireless Network Name (SSID)

SSID Broadcast

Channel 2.412 GHz ☐ Auto Channel Scan

WDS

Remote AP MAC Address

1. 2. 3. 4.
5. 6. 7. 8.

Site Survey

Scan

Type	CH	Signal	BSSID	Security	SSID

Authentication

PassPhrase Settings

Cipher Type

PassPhrase

Open System
Shared Key
Open System/Shared Key
WPA-Personal
WPA2-Personal
WPA-Auto-Personal

1800 Sec

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Status

LAN Settings

Get IP From

IP address

Subnet Mask

Default Gateway

DNS 1

DNS 2

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Advanced Wireless Settings

Wireless Band: IEEE 802.11a

Frequency: 5.745 GHz

Channel: 149

Data Rate: Auto

Beacon Interval (20 - 1000): 100

DTIM (1 - 255): 1

Fragment Length (256 - 2346): 2346

RTS Interval (1 - 2346): 2346

Transmit Power: Full

Radio: On

WMM: Enable

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Advanced Wireless Settings

Wireless Band: IEEE 802.11a

Frequency: 5.745 GHz

Channel: 149

Data Rate: Auto

Beacon Interval (20 - 1000): 100

DTIM (1 - 255): 1

Fragment Length (256 - 2346): 2346

RTS Interval (1 - 2346): 2346

Transmit Power: Full

Radio: On

WMM: Enable

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Advanced Wireless Settings

Wireless Band	IEEE 802.11a
Frequency	5.745 GHz
Channel	149
Data Rate	Auto
Beacon Interval (20 - 1000)	100
DTIM (1 - 255)	1
Fragment Length (256 - 2346)	2346
RTS Interval (1 - 2346)	2346
Transmit Power	Full
Radio	Full
WMM	Full
	Half(-3dB)
	Quarter(-6dB)
	Eighth(-9dB)
	Min

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Advanced Wireless Settings

Wireless Band	IEEE 802.11g
Frequency	2.412 GHz
Channel	1
Data Rate	Auto
Beacon Interval (20 - 1000)	Auto
DTIM (1 - 255)	1 Mbps
Fragment Length (256 - 2346)	2 Mbps
RTS Interval (1 - 2346)	5.5 Mbps
Transmit Power	6 Mbps
Radio	9 Mbps
WMM	11 Mbps
Wireless B/G Mode	12 Mbps
	18 Mbps
	24 Mbps
	36 Mbps
	48 Mbps
	54 Mbps

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Advanced Wireless Settings

Wireless Band	IEEE 802.11g
Frequency	2.412 GHz
Channel	1
Data Rate	Auto
Beacon Interval (20 - 1000)	100
DTIM (1 - 255)	1
Fragment Length (256 - 2346)	2346
RTS Interval (1 - 2346)	2346
Transmit Power	Full
Radio	On
WMM	Enable
Wireless B/G Mode	Mixed

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

AP Grouping Settings

Load Balance	Disable
User Limit (0 - 64)	10
Link Integrate	Disable

Apply

802.11A/G Outdoor Wireless AP/Bridge

Home
Tool
Configuration
System
Logout
Help

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
- DHCP Server
- Filters
- Status

Multi-SSID Settings

☒ Enable Multi-SSID
☐ Enable VLAN State

☒ both
☐ 11a
☐ 11g

Wireless Settings

Band
IEEE 802.11a

Index
Primary SSID

Wireless Network Name (SSID)
7700APA

SSID Broadcast
Enable

Security
WPA-Auto-Personal

VLAN ID
1

PassPhrase Settings

Cipher Type
AES

Group Key Update Interval
1800
Sec

PassPhrase
password

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

802.11A/G Outdoor Wireless AP/Bridge

Home
Tool
Configuration
System
Logout
Help

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
- DHCP Server
- Filters
- Status

Multi-SSID Settings

☒ Enable Multi-SSID
☐ Enable VLAN State

☒ both
☐ 11a
☐ 11g

Wireless Settings

Band
IEEE 802.11a

Index
Primary SSID

Wireless Network Name (SSID)

Primary SSID
Multi-SSID 1
Multi-SSID 2
Multi-SSID 3
Multi-SSID 4
Multi-SSID 5
Multi-SSID 6
Multi-SSID 7

SSID Broadcast

Security

VLAN ID

PassPhrase Settings

Cipher Type
AES

Group Key Update Interval
1800
Sec

PassPhrase
password

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Multi-SSID Settings

☒ Enable Multi-SSID ☐ Enable VLAN State
☒ both ☐ 11a ☐ 11g

Wireless Settings

Band: IEEE 802.11a
 Index: Multi-SSID 1
 Wireless Network Name (SSID): dlink
 SSID Broadcast: Enable
 Security: None
 VLAN ID: None

Key Settings

Key Type: WPA-Auto-Personal
 Key Size: 128 Bits
 Key: 1

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Multi-SSID Settings

☒ Enable Multi-SSID ☐ Enable VLAN State
☒ both ☐ 11a ☐ 11g

Wireless Settings

Band: IEEE 802.11g
 Index: Multi-SSID 1
 Wireless Network Name (SSID): dlink
 SSID Broadcast: Enable
 Security: None
 VLAN ID: 1

Key Settings

Key Type: Hex
 Key Size: 64 Bits
 Key: 1

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Multi-SSID Settings

☒ Enable Multi-SSID ☐ Enable VLAN State
☒ both ☐ 11a ☐ 11g

Wireless Settings

Band: IEEE 802.11g
Index: Multi-SSID 1
Wireless Network Name (SSID): Primary SSID
Multi-SSID 1
Multi-SSID 2
Multi-SSID 3
Multi-SSID 4
Multi-SSID 5
Multi-SSID 6
Multi-SSID 7
SSID Broadcast: ☐
Security: ☐
VLAN ID:

Key Settings

Key Type: Hex
Key Size: 64 Bits
Key: 1

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Multi-SSID Settings

☒ Enable Multi-SSID ☒ Enable VLAN State
☒ both ☐ 11a ☐ 11g

Wireless Settings

Band: IEEE 802.11g
Index: Primary SSID
Wireless Network Name (SSID): 7700APG
SSID Broadcast: Enable
Security: WPA-Personal
VLAN ID: 1

PassPhrase Settings

Cipher Type: AUTO
Group Key Update Interval: 1800 Sec
PassPhrase: password123

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Multi-SSID Settings

☒ Enable Multi-SSID ☒ Enable VLAN State☒ both ☐ 11a ☐ 11g

Wireless Settings

Band: IEEE 802.11g
Index: Multi-SSID 1
Wireless Network Name (SSID): dlink
SSID Broadcast: Enable
Security: None
VLAN ID: 1

Key Settings

Key Type: Hex
Key Size: 64 Bits
Key: 1

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	OFF	
Primary	7700APG	11g	WPA-Personal	OFF	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Filters
 - Status

Multi-SSID Settings

☒ Enable Multi-SSID ☒ Enable VLAN State☒ both ☐ 11a ☐ 11g

Wireless Settings

Band: IEEE 802.11g
Index: Multi-SSID 1
Wireless Network Name (SSID): dlink
SSID Broadcast: Enable
Security: WPA-Personal
VLAN ID: 1

PassPhrase Settings

Cipher Type: AUTO
Group Key Update Interval: AUTO Sec
PassPhrase: TKIP

Apply

Index	SSID	Band	Encryption	VLAN ID	Delete
Primary	7700APA	11a	WPA-Auto-Personal	1	
Primary	7700APG	11g	WPA-Personal	1	

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Status

DHCP Dynamic Pools

DHCP Server Control

Function Enable/Disable Enable

Dynamic Pool Settings

IP Assigned From 192.168.0.100

The Range of Pool (1-255) 60

SubMask 255.255.255.0

Gateway 192.168.0.1

Wins 4.2.2.2

DNS 4.2.2.2

Domain Name dlink.com.au

Lease Time (60 - 31536000 sec) 36000

Status ON

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Status

DHCP Static Pools

DHCP Server Control

Function Enable/Disable Enabled

Static Pool Settings

Assigned IP 0.0.0.0

Assigned MAC Address

SubMask 0.0.0.0

Gateway 0.0.0.0

Wins 0.0.0.0

DNS 0.0.0.0

Domain Name

Status OFF

Apply

MAC Address	IP address	State	Edit	Delete

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
- Status

Current IP List

Current DHCP Dynamic Pools

Binding MAC Address	Assigned IP address	Lease time
00:1c:f0:0d:d7:11	192.168.0.100	35280
00:0f:3d:a9:80:15	192.168.0.101	34800

Current DHCP Static Pools

Binding MAC Address	Assigned IP address
---------------------	---------------------

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
- Status

Ethernet MAC ACL

Access Control

Disable

MAC Address

Disable

Accept

Reject

Apply

ID	MAC Address	Delete
----	-------------	--------

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
- DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
- Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
- Status

Wireless MAC ACL

Wireless BandIEEE 802.11a

Access ControlDisable

MAC Address

Disable

Accept

Reject

Apply

ID	MAC Address	Delete
----	-------------	--------

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
- DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
- Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
- Status

Wireless IP ACL

Access ControlDisable

IP address

Disable

Accept

Reject

Apply

ID	IP address	Delete
----	------------	--------

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
 - Status

WLAN Partition Settings

Wireless Band IEEE 802.11a

Internal Station Connection ☒ Enable

Ethernet to WLAN Access ☒ Enable

Apply

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Device Information

Firmware Version: v3.10

Ethernet MAC Address : 00:15:e9:c1:d7:b0

WLAN0 MAC Address : Primary : 00:15:e9:c1:d7:b0
Secondary: 00:15:e9:c1:d7:b8 ~ 00:15:e9:c1:d7:be

WLAN1 MAC Address : Primary : 00:15:e9:c1:d7:b0
Secondary: 00:15:e9:c1:d7:b1 ~ 00:15:e9:c1:d7:b7

Ethernet

Get IP From : Manual

IP address : 192.168.0.50

Subnet Mask : 255.255.255.0

Gateway : 0.0.0.0

Wireless (802.11a)

SSID : 7700APA

Channel : 149

Data Rate : Auto

Security Level : WPA-Auto-Personal / Encryption Enabled

Wireless (802.11g)

SSID : 7700APG

Channel : 1

Data Rate : Auto

Security Level : WPA-Personal / Encryption Enabled

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Indication


Temperature Indication



WLAN 802.11A RSSI Indication



WLAN 802.11G RSSI Indication



- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

Client Information

Client Information Station association with 11A : 0
 Station association with 11B/G : 1

SSID	MAC	Band	Authentication	Active	Signal	PSM
Primary-SSID	00:1c:f0:0d:d7:11	G	WPA-Personal	1047	100%	On

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - Log

WDS Information

WDS Information

Station association with 11A : 0
Station association with 11B/G : 1

SSID	MAC	Band	Authentication	Signal	Channel
Primary-SSID	00:15:e9:c1:d7:60	G	WPA-Personal	66%	1

- DWL-7700AP
 - Basic Settings
 - Wireless
 - LAN
 - Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
 - Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - WLAN 802.11A Tra
 - WLAN 802.11G Tra
 - Log

WLAN 802.11A Traffic Statistics

Throughput

Transmit Success Rate	100 %
Transmit Retry Rate	0 %
Receive Success Rate	100 %
Receive Duplicate Rate	0 %
RTS Success Count	0
RTS Failure Count	0

Transmitted Frame Count

Transmitted Frame Count	74546
Multicast Transmitted Frame Count	85
Transmitted Error Count	63
Transmitted Total Retry Count	0
Transmitted Multiple Retry Count	0

Received Frame Count

Received Frame Count	0
Multicast Received Frame Count	0
Received Frame FCS Error Count	0
Received Frame Duplicate Count	0
ACK RCV. failure Count	1

WEP Frame Error Count

WEP Excluded Frame Count	0
WEP ICV Error Count	0

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping List
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
- Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - WLAN 802.11A Traffic Statistics
 - WLAN 802.11G Traffic Statistics
 - Log

WLAN 802.11G Traffic Statistics

Throughput

Transmit Success Rate	100 %
Transmit Retry Rate	0 %
Receive Success Rate	100 %
Receive Duplicate Rate	0 %
RTS Success Count	0
RTS Failure Count	1739

Transmitted Frame Count

Transmitted Frame Count	29168642
Multicast Transmitted Frame Count	85
Transmitted Error Count	21002
Transmitted Total Retry Count	0
Transmitted Multiple Retry Count	0

Received Frame Count

Received Frame Count	28949955
Multicast Received Frame Count	2378
Received Frame FCS Error Count	1739
Received Frame Duplicate Count	1170
ACK RCV. failure Count	1677

WEP Frame Error Count

WEP Excluded Frame Count	5
WEP ICV Error Count	5

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
 - DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping List
 - Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
- Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
 - Stats
 - WLAN 802.11A Traffic Statistics
 - WLAN 802.11G Traffic Statistics
 - Log
 - View Log
 - Log Settings

View Log

Total Log: 362

Clear Log

Time	Type	Message
0 day, 0:03:42	System	--Web login successfully from 192.168.0.4
0 day, 0:03:07	Wireless	--WDS AP connected: wlan 1 11G AP 00:15:e9:c1:d7:60
0 day, 0:02:32	Wireless	--WDS AP connected: wlan 0 11A AP 00:15:e9:c1:d7:60
0 day, 0:01:57	System	--AP cold start with f/w version: DWL7700AP.v310.r0112.t465-5
0 day, 0:01:22	Wireless	--WLAN1 WDS with AP ready
0 day, 0:00:47	Wireless	--WLAN0 WDS with AP ready
0 day, 0:04:00	System	--Web login successfully from 192.168.0.2
0 day, 0:03:25	Wireless	--WDS AP connected: wlan 1 11G AP 00:15:e9:c1:d7:60
0 day, 0:02:50	Wireless	--WDS AP connected: wlan 0 11A AP 00:15:e9:c1:d7:60
0 day, 0:02:15	System	--AP warm start with f/w version: DWL7700AP.v310.r0112.t465-5
0 day, 0:01:40	Wireless	--WLAN1 WDS with AP ready
0 day, 0:01:05	Wireless	--WLAN0 WDS with AP ready
0 day, 0:03:25	System	--Web login successfully from 192.168.0.91
0 day, 0:02:50	Wireless	--WDS AP connected: wlan 0 11A AP 00:15:e9:c1:d7:60
0 day, 0:02:15	System	--AP warm start with f/w version: DWL 770

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

- Basic Settings
 - Wireless
 - LAN
- Advanced Settings
 - Performance
 - Grouping
 - Multi-SSID
- DHCP Server
 - Dynamic Pool Setting
 - Static Pool Setting
 - Current IP Mapping L
- Filters
 - Ethernet MAC ACL
 - Wireless MAC ACL
 - Wireless IP ACL
 - WLAN Partition
- Status
 - Device Information
 - Indication
 - Client Information
 - WDS Information
- Stats
 - WLAN 802.11A Tra1
 - WLAN 802.11G Tra1
- Log
 - View Log
 - Log Settings

System Log Settings

Log Settings

Log Server / IP address

Log Type

- ☒ System Activity
- ☒ Wireless Activity
- ☒ Notice

SMTP Settings

SMTP☐ Enable

SMTP Server / IP address

SMTP Sender

SMTP Recipient

Apply

D-Link®802.11A/G Outdoor Wireless AP/Bridge

HomeToolConfigurationSystemLogoutHelp

DWL-7700AP

- Basic Settings
- Advanced Settings
- Status
 - Administrator Settings
 - Firmware and SSL
 - Configuration File
 - SNTP

System Information

System Name

DWL-7700AP

System Time

Not Available

Up Time

0 day, 18:06:10

Firmware Version

v3.10

IP address

192.168.0.50

D-Link®

802.11A/G Outdoor Wireless AP/Bridge

Home

Tool

Configuration

System

Logout

Help

DWL-7700AP

Basic Settings

Advanced

Status

Administrator Settings

Firmware and SSL

Configuration File

SNTP

Administrator Settings

Administrator IP

☐ Limit Administrator IP 1

Limit Administrator IP 2

Login Settings

User Name

admin

Old Password

New Password

Confirm New Password

Console Settings

Status

☒ Enable

Console Protocol

☒ Telnet ☐ SSH

Timeout

1 Min

SNMP Settings

Status

☒ Enable

Public Community String

public

Private Community String

private

Apply

D-Link®

802.11A/G Outdoor Wireless AP/Bridge

Home

Tool

Configuration

System

Logout

Help

DWL-7700AP

Basic Settings

Advanced

Status

Administrator Settings

Firmware and SSL

Configuration File

SNTP

Firmware and SSL Certification Upload

are From Local Hard Drive

Firmware Version: v3.10

Upload Firmware From File :

Browse...

Upload

Update SSL Certification From Local Hard Drive

Upload Certificate From File :



Browse...

Upload

Upload Key From File :

Browse...

Upload

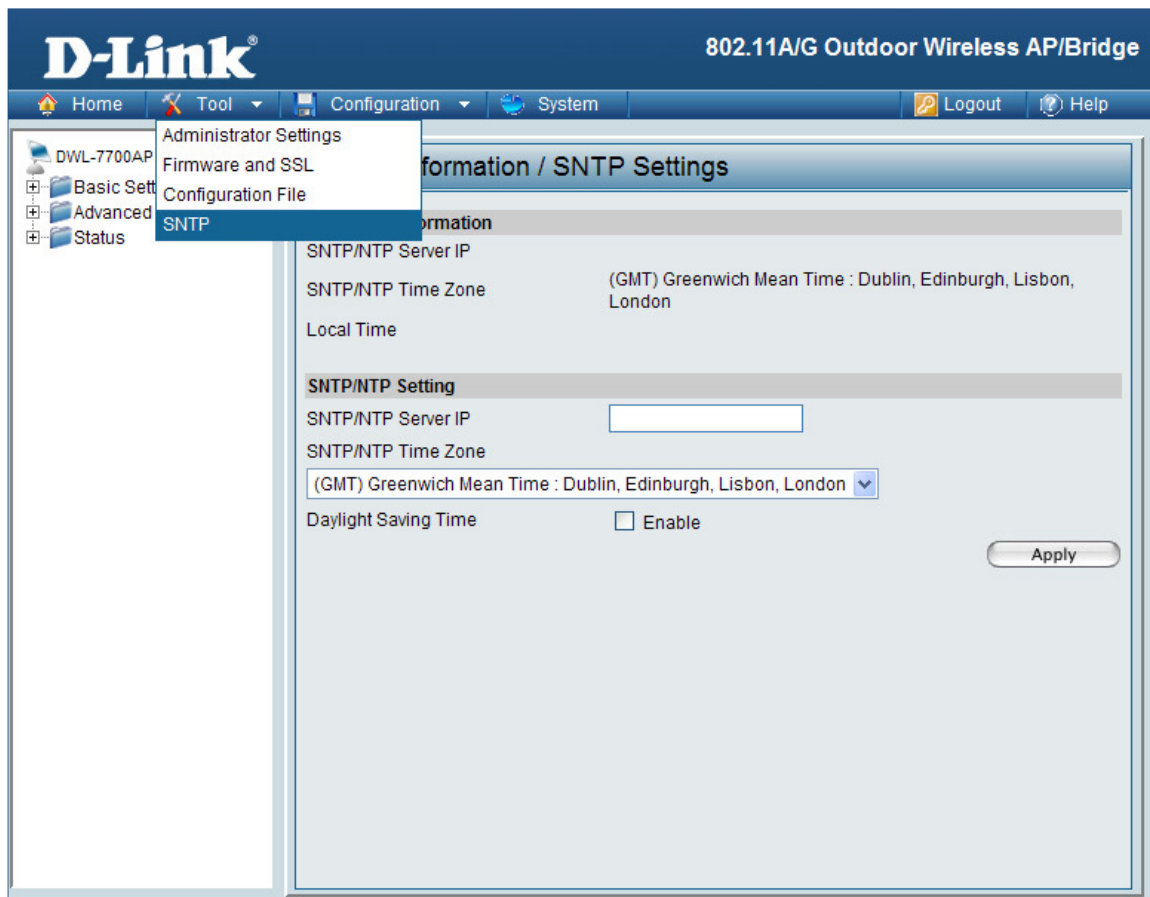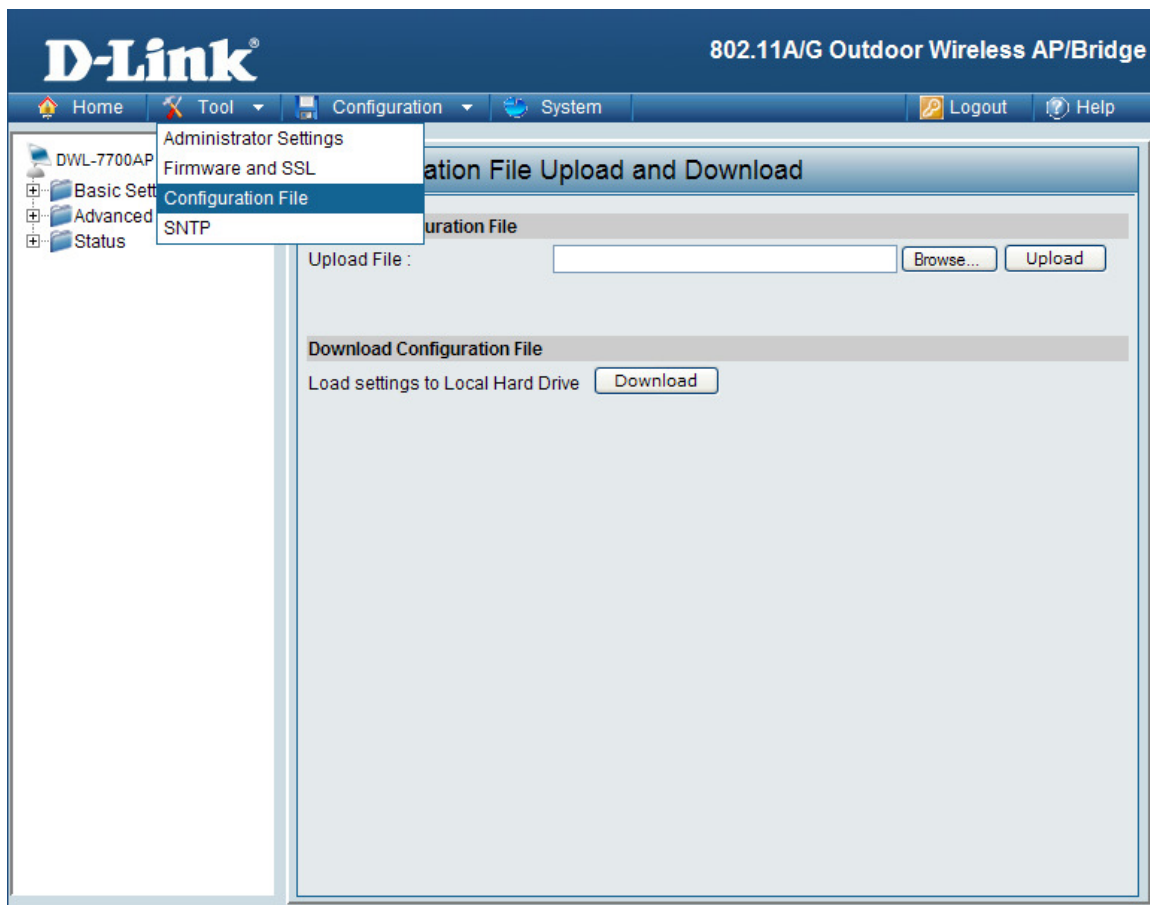

D-Link®

802.11A/G Outdoor Wireless AP/Bridge

Home

Tool

Configuration

System

Logout

Help

DWL-7700AP

Basic Settings

Advanced Settings

Status

Save and Activate

Discard Changes

SNTP Settings

SNTP/NTP Information

SNTP/NTP Server IP

SNTP/NTP Time Zone

(GMT) Greenwich Mean Time : Dublin, Edinburgh, Lisbon, London

Local Time

SNTP/NTP Setting

SNTP/NTP Server IP

SNTP/NTP Time Zone

(GMT) Greenwich Mean Time : Dublin, Edinburgh, Lisbon, London

Daylight Saving Time

Enable

Apply

D-Link®

802.11A/G Outdoor Wireless AP/Bridge

Home

Tool

Configuration

System

Logout

Help

DWL-7700AP

Basic Settings

Advanced Settings

Status

System Settings

Apply Settings and Restart

Restart

Restore to Factory Default Settings

Restore