

How to access Command Line Interface in DSL-300, DSL-300+, DSL-500, DSL-504

Option 1.

If your router/modem has Serial Port (RS232) which looks like this:



use a serial cable which comes with the router/modem. If it looks like a telephone socket please go to **Option 2**.

Connect one end of cable to the router/modem and another end to the serial (COM) port of your computer.


Click the Windows Start button, point to Programs > Accessories > (Communications) > HyperTerminal. Double click the Hypertrm.exe icon.

In HyperTerminal window in the Name field, type: Test and click OK.

In the Phone Number dialog select Connect using: COM1 (or COM2 if you are using COM2). Click OK.



In next window set Port Settings: Bits per second: 9600 (8, None, 1, Hardware)

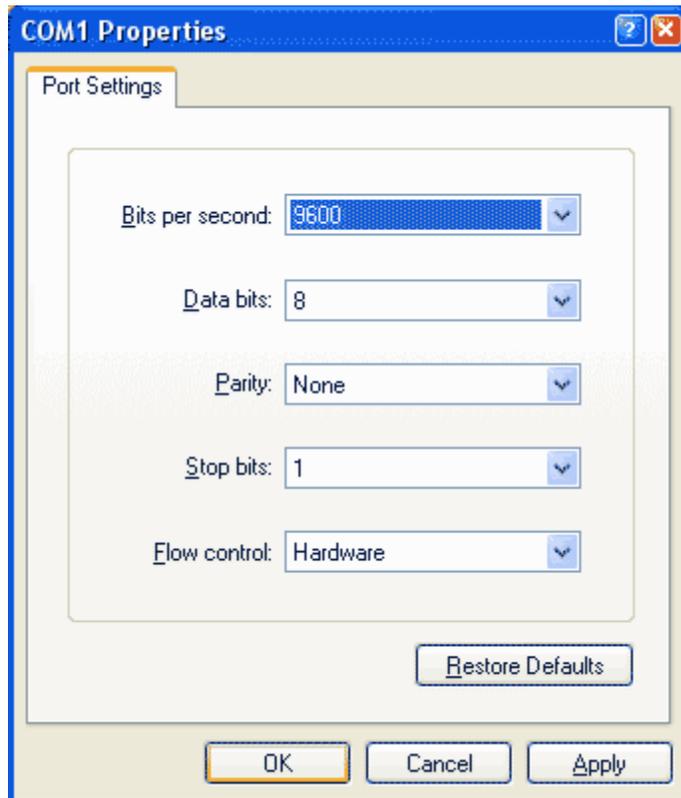

Click on OK. The HyperTerminal window will appear. Press ENTER and you should get a prompt which looks like:

```
192.168.0.1 >
```

Option 2.

In order to get access to router/modem's command line interface you can use Telnet.

In Windows click on Start > Run... and type

telnet 192.168.0.1 (where 192.168.0.1 is router/modem's IP address. DSL-300 has 192.168.1.1 address).

Click on OK. You will be prompted to enter password. Default password is "private". You may not see what are you typing, just type *private* and press Enter. You should get a prompt which looks like:

```
192.168.0.1 >
```