


# How to change ADSL Username and Password in your modem router

*This document details how to change ADSL Username and Password settings stored in your modem*

---

**Step 1.** Open your Internet browser e.g. Internet Explorer, Firefox, Chrome, Safari, etc. and enter the IP address of your D-Link modem in the **address bar**: http://10.1.1.1

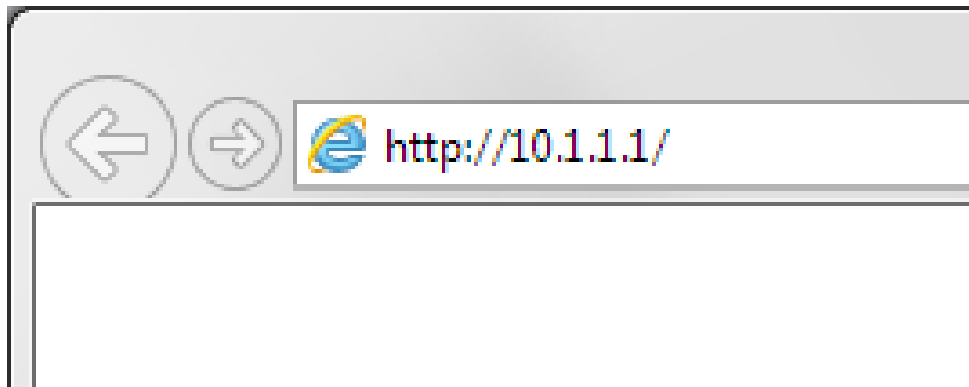

**Step 2.** When prompted type in the Username and Password, then click on the “OK” button.  
If you have not changed the password for the modem administration, the factory settings are:

Username: admin

Password: admin



*If you cannot recall the password you assigned to your modem you will need to reset the modem to factory defaults by pressing the reset button for 10 seconds. Please note that this will revert all the settings in the modem to factory settings and you will have to reconfigure it with your Internet settings and Wireless security. Make sure you have your Internet account details (given by your Internet Provider) handy.*

**Step 3.** After logging in you will be presented with the modem's configuration pages. Please click on [Home] tab, and then click on [WAN]:

The screenshot displays the configuration interface of a D-Link modem. On the left sidebar, there are several navigation buttons: Wizard, Wireless, WAN (highlighted with a red circle), LAN, DHCP, DNS, Dynamic DNS, and Logout. The main content area has a top navigation bar with tabs: Home (highlighted with a red circle), Advanced, Tools, Status, and Help. Below the tabs, the 'ATM VC Settings' section includes fields for PVC (Pvc0), VPI (8), VCI (35), Virtual Circuit (Enabled), and WAN Setting (PPPoE/PPPoA). The 'PPPoE/PPPoA' section includes fields for User Name (username), Password (masked with dots), Authentication Type (Auto), Connection Type (PPPoE LLC), MTU (1400 bytes), MRU (1492 bytes), Default Route (Enabled), PPPoE Pass Through (Disabled), NAT (Enabled), Firewall (Enabled), IP Control (Dynamic IP), and Static IP (0.0.0.0). At the bottom, there is a message: 'Please save and reboot the device to take effect !' and three buttons: Apply (with a green checkmark icon), Cancel (with an orange X icon), and Help (with a red plus icon).

**Step 4.** Type in your NEW account details as given by you Internet Service Provider:

- In the "Username" field – type in your new username given by your Internet Service Provider
- In the "Password" field – type in your new password given by your Internet Service Provider

**Home** **Advanced** **Tools** **Status** **Help**

### ATM VC Settings

PVC

VPI

VCI

Virtual Circuit

WAN Setting

### PPPoE/PPPoA

User Name

Password

Authentication Type

Connection Type

MTU  bytes

MRU  bytes

Default Route

PPPoE Pass Through

NAT

Firewall


IP Control

Static IP

Please save and reboot the device to take effect !

**Step 5.** Click on the APPLY button at the bottom of the page.

**Step 6.** To save the new settings into the modem's memory click on the [Tools] tab and then on [System]. Click on the "Save and Reboot" button.

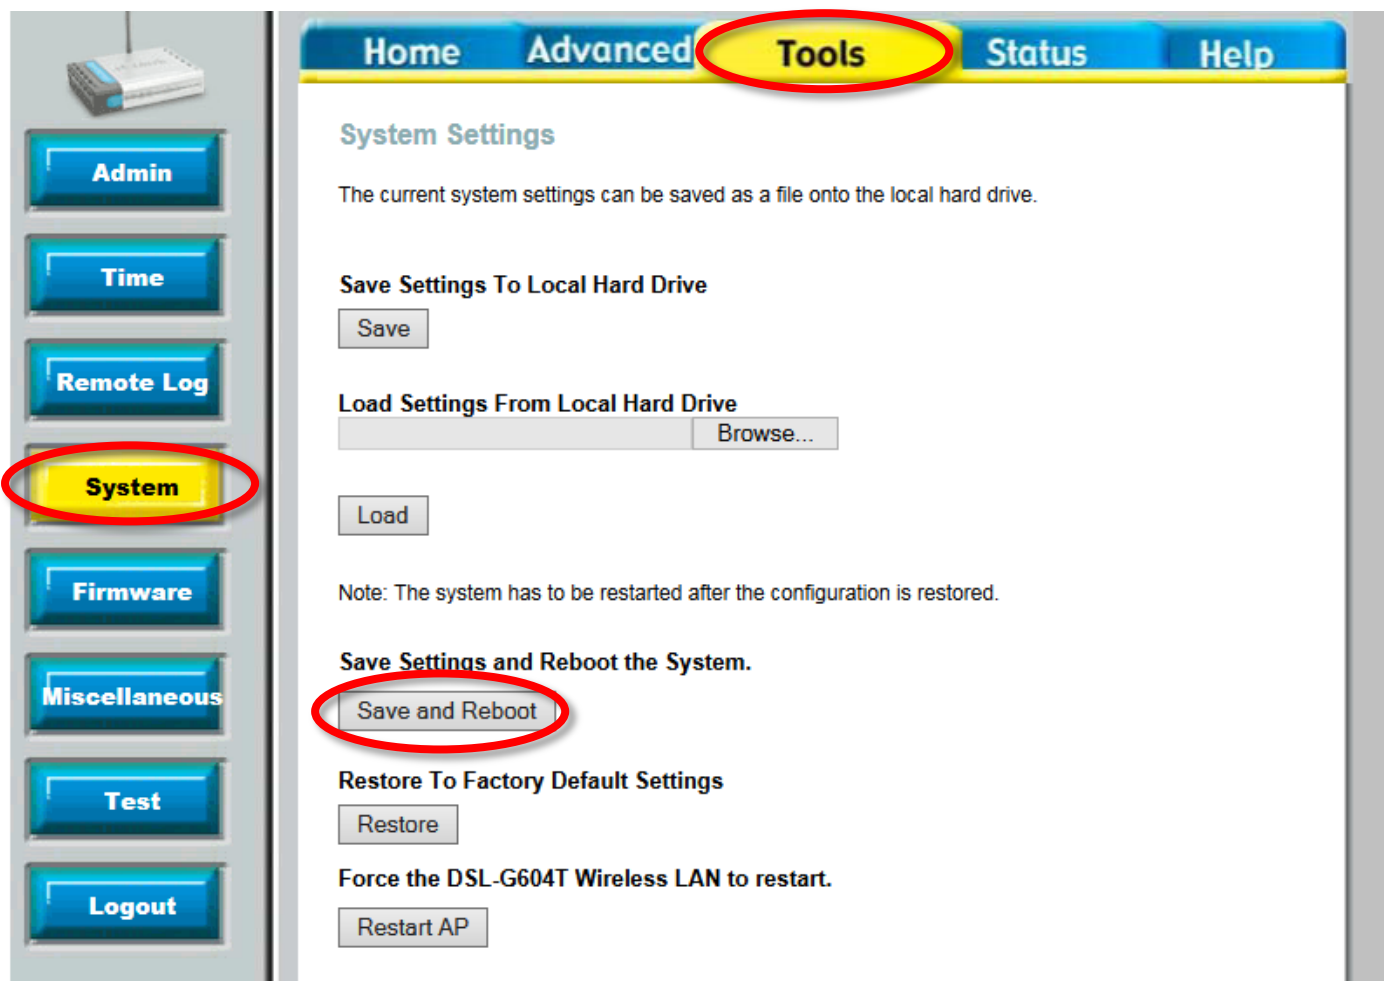

**Step 7.** After your modem reboots, log into it again and check the [Status] page. Please wait 1-2 minutes and your modem should report WAN Status as Connected.