



USB 2.0 10/100 FAST ETHERNET ADAPTER

USB 2.0 PLUG AND PLAY

Can be used right away without requiring any configuration

TRUE 10/100 MBPS NETWORK CONNECTIVITY

Create a fast, reliable wired connection to your network by simply plugging it into your PC

DYNAMIC POWER MANAGEMENT

Reduces power usage during light traffic or when Ethernet cable is unplugged



FAST ETHERNET CONNECTIVITY

The DUB-E100 USB 2.0 10/100 Fast Ethernet Adapter is a high-speed adapter that plugs into any available USB port on your computer to enable you to connect to an Ethernet network. The adapter eliminates the need to open your computer to install a network card, and it also lets you keep your notebook's expansion slot free for other uses.

EASY TO INSTALL AND USE

The DUB-E100 USB 2.0 10/100 Fast Ethernet Adapter connects to your computer's USB port and is ready to run almost as soon as it's plugged in. There is no need to change any configuration settings on your computer as the drivers install automatically after you insert the DUB-E100 CD.¹ For extra convenience, the adapter's USB connector can be folded into the body, allowing it to be even more compact when not in use and being carried around.

ENERGY SAVING DURING USE

The DUB-E100 supports an energy-saving suspend and resume function to minimize power consumption, which is especially useful for notebook users as it helps conserve battery life, allowing them to use their notebooks for a longer period. Power is provided directly by the USB bus, eliminating the need for an external AC power adapter.

¹Windows XP requires the user to confirm before automatic installation can begin.

WHAT THIS PRODUCT DOES


The DUB-E100 USB 2.0 10/100 Fast Ethernet adapter provides easy Fast Ethernet connectivity for your desktop or notebook PC. Just connect the DUB-E100 to a USB port on your computer and you're ready to connect to your switch, hub, or router via a wired connection.

KEY FEATURES

- RJ-45 (10/100 Mbps) port
- USB 2.0 port with attached USB Type A connector
- Energy-saving suspend/resume function
- Plug-and-Play installation
- Runs on Windows 7/Vista/XP/2000, Mac OS 10.4 to 10.7, and Linux
- USB connector folds into adapter body



TECHNICAL SPECIFICATIONS

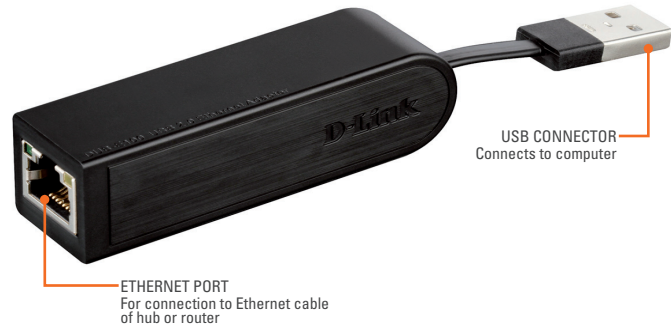

STANDARDS

- USB Specification Version 2.0
- USB Specification Version 1.1
- USB Specification Version 1.0
- OHCI (Open Host Controller Interface)
- EHCI (Enhanced Host Controller Interface)
- IEEE 802.3 Ethernet
- IEEE 802.3u 100BASE-T, TX, and T4 compatible
- Supports suspended mode and remote wakeup
- Supports full and half duplex in Fast Ethernet

DEVICE INTERFACES

- USB Type A connector
- RJ-45 (10/100 Mbps Dual-Speed)

MINIMUM SYSTEM REQUIREMENTS

- Operating System: Microsoft Windows 7/Vista/XP SP3/2000, Mac OS 10.4 to 10.7, and Linux

CONFIGURATION/MANAGEMENT

- Advanced Power Management reduces power usage during idle or light traffic periods

LEDS

- Power/Link
- Tx/Rx Traffic

POWER

- Bus Powered 0.5 A, 5 V DC

POWER CONSUMPTION

- 150 mA, 3.3 V DC

DIMENSIONS (L x W x H)

- 73 x 21.3 x 20 mm (2.87 x 0.84 x 0.79 inches)

WEIGHT

- 22 g (0.05 pounds)

OPERATING TEMPERATURE

- 0 °C to 40 °C (32 °F to 104 °F)

STORAGE TEMPERATURE

- -10 °C to 70 °C (14 °F to 158 °F), non-condensing

OPERATING HUMIDITY

- 5% to 95%, non-condensing

NON-OPERATING HUMIDITY

- 0% to 95%, non-condensing

CERTIFICATIONS

- CE
- C-Tick
- FCC Class B



D-Link Corporation
No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2012 D-Link Corporation. All rights reserved.
Release 01 (March 2012)