


# DGS-3630-Series Switches


Firmware Update Procedure  
(CLI and GUI)

# Updating Firmware (CLI)

- Launch TFTP Server on your computer.
- Place the firmware file into the default TFTP folder.

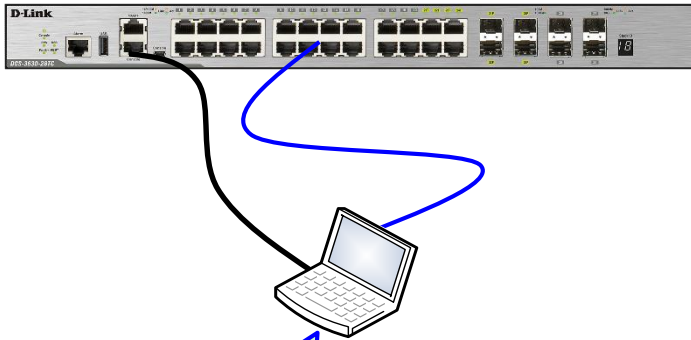

In this example the computer is set with static IP **10.1.1.18**  
TFTP Server is running.  
Firmware file is in default TFTP folder.

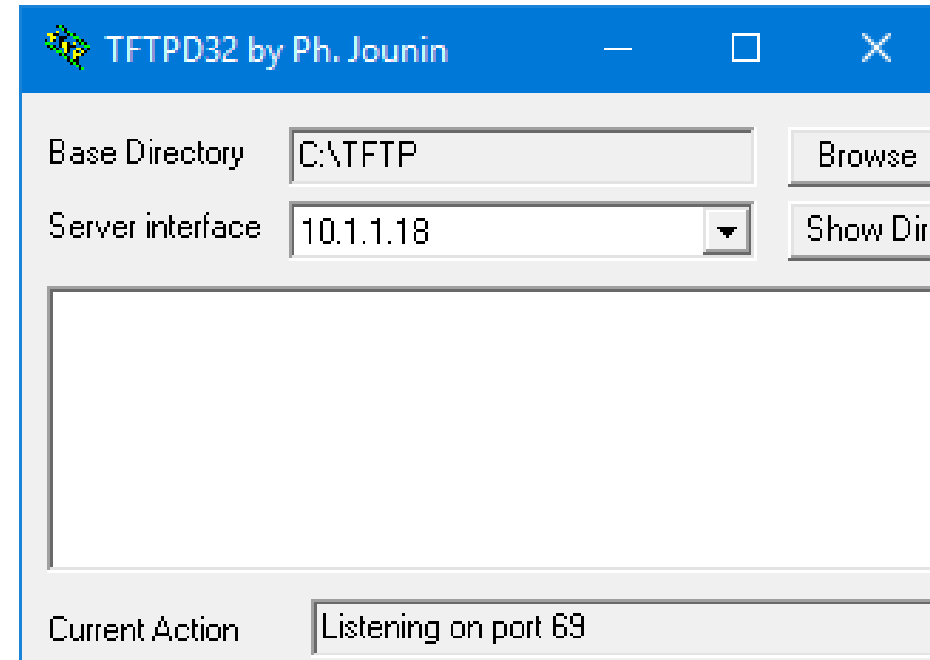

# Updating Firmware (CLI)

- Load firmware into the switch.
- Set switch to use new boot image.

```
Switch> enable
Switch# copy tftp: //10.1.1.18/DGS3630_FW_v2.00.017.had flash:
DGS3630_FW_v2.00.017.had
Address of remote host [10.1.1.18]?
Source filename [DGS3630_FW_v2.00.017.had]?
Destination filename [DGS3630_FW_v2.00.017.had]?
Accessing tftp://10.1.1.18/DGS3630_FW_v2.00.017.had...
Transmission start...
Transmission finished, file length 14805356 bytes.
Please wait, programming flash..... Done.
```

IP address of your PC (TFTP server)

Firmware file name


Press "Enter"

```
Switch# config terminal
Switch(config)# boot image DGS3630_FW_v2.00.017.had
```

```
Switch(config)# show boot
Unit 1
Boot image: /c:/DGS3630_FW_v2.00.017.had
Boot config: /c:/config.cfg
```


# Updating Firmware (GUI)

- In the toolbar select Tools > Firmware Upgrade > Firmware upgrade from HTTP.
- Click on "Browse" and choose the firmware file *DGS3630\_FW\_v2.00.017.had*.
- Destination file: can be the same firmware file name.
- Click on the "Upgrade" button.
- Wait for a minute until the "Programming flash" message appears.

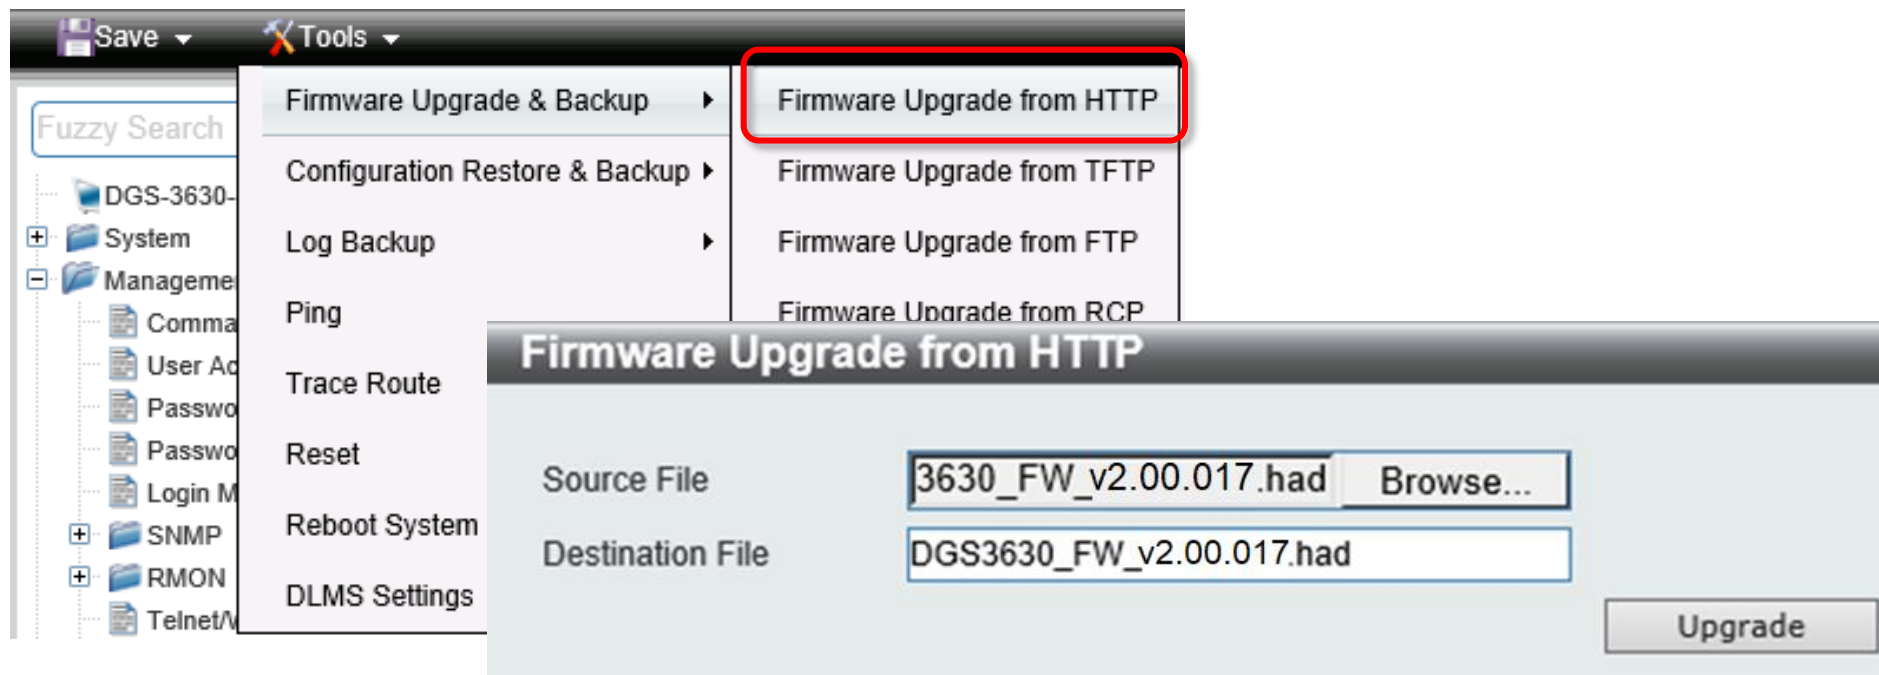

# Updating Firmware (GUI)

- Go to Management > File System. Click on "C" drive.
- Find the newly loaded firmware file and set it as "Boot Up" image.

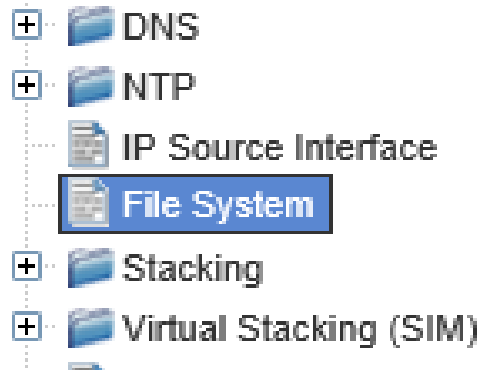

### File System

Path:

Drive	Media Type	Size (MB)	File System
<a href="#">C:</a>	Flash	1015	FF

Index	Info	Attr	Size (byte)	Update Time	Name	Boot Up	Rename	Delete
1	RUN(*)	-rw	14805356	Jun 01 2014 06:29:33	DGS3630_FW_v2.00.017.had	<input type="button" value="Boot Up"/>	<input type="button" value="Rename"/>	<input type="button" value="Delete"/>
2	CFG(*)	-rw	39702	May 31 2014 08:09:04	config.cfg	<input type="button" value="Boot Up"/>	<input type="button" value="Rename"/>	<input type="button" value="Delete"/>
3	RUN	-rw	14805356	Jun 13 2016 15:29:26	runtime.had	<input type="button" value="Boot Up"/>	<input type="button" value="Rename"/>	<input type="button" value="Delete"/>
4		d--	0	May 31 2014 03:45:31	<a href="#">system</a>		<input type="button" value="Delete"/>	

1064828928 bytes total (1034876928 bytes free)

(\*) -with boot up info

