



User Manual

Dual Band AC1750 Gigabit ADSL2+ Modem Router

DSL-2890AL

Table of Contents

Table of Contents	2	Website Filter	116
Product Overview	3	Inbound Filter	117
Package Contents	3	Firewall Settings.....	119
System Requirements	3	Routing.....	122
Features.....	4	Advanced Wireless	123
Hardware Overview	5	Wi-Fi Protected Setup.....	125
Front Panel	5	Advanced Network.....	130
Rear Panel	6	Guest Wi-Fi	132
Bottom Panel	7	IPv6 Firewall	141
Basic Installation	8	IPv6 Routing	143
Before You Begin	8	Maintenance Category	144
Installation Notes	8	Admin	145
Information needed from ADSL service provider.....	10	Time	149
Information needed about this Router	11	Email Settings	151
Information needed about your LAN or computer	11	System	153
Device Installation	12	Firmware	154
Power on Router	12	Dynamic DNS	156
Factory Reset Button	12	Diagnostics	158
Network Connections.....	13	Schedules	160
Getting Started	14	Status Category.....	162
How to connect to the Web User Interface.....	14	Device Info	163
First Time Installation.....	15	Logs	167
Web User Interface Configuration	22	Statistics.....	169
Setup Category.....	23	Internet Sessions	172
Internet.....	24	Wireless	173
Wireless Settings	40	Routing.....	174
Network Settings.....	56	IPv6	175
Storage	59	IPv6 Routing	176
Media Server.....	66	Help Category.....	177
IPv6.....	68	Knowledge Base	178
mydlink™ Settings	94	Networking Basics	178
Advanced Category	98	Wireless Basics	180
Virtual Server	99	Wireless Modes	182
Port Forwarding	101	Wireless Security.....	182
Port Triggering	103	What is WPA?.....	182
QoS Engine.....	105	Frequently Asked Questions	184
Network Filter.....	108	Technical Specifications	185
Access Control.....	110		

Product Overview

Package Contents

This product should contain all of the below mentioned items within its packaging:

- One DSL-2890AL Router
- One Power Adapter
- One CD containing the User Manual
- One twisted-pair telephone cable used for DSL connection
- One straight-through Ethernet cable
- One Quick Installation Guide



If any of the above items are missing, please contact your reseller.

Note: Using a power supply with a different voltage rating than the one included with the router will cause damage to this product and void the warranty for this product.

System Requirements

Network Requirements:	<ul style="list-style-type: none">• Ethernet Adapter at 10/100/1000Mbps.• Wireless Adapter with IEEE 802.11ac, 802.11n, 802.11a, or 802.11b/g Protocols.
Web User Interface Requirements:	<ul style="list-style-type: none">• Windows®, Macintosh, or Linux-based Operating System.• Internet Browser like Internet Explorer 7 or higher, Firefox 3.5 or higher, Safari 4 or higher, or Chrome 8 or higher.
Internet Requirements:	<ul style="list-style-type: none">• ADSL Internet Connection Service from an ISP.










Features

- **Faster Wireless Networking** - The router provides up to 450Mbps* for the 2.4GHz band 802.11n wireless connection and 1.3Gbps for the 5GHz band 802.11ac wireless connection. This capability allows users to participate in real-time activities online, such as video streaming, online gaming, and real-time audio.
- **Compatible with 802.11a, 802.11b and 802.11g Devices** - The router is still fully compatible with the IEEE 802.11a, 802.11b, and 802.11g standards, so it can connect with existing 802.11a, 802.11b and 802.11g PCI, USB and Cardbus adapters.
- **DHCP Support** - Dynamic Host Configuration Protocol automatically and dynamically assigns all LAN IP settings to each host on your network. This eliminates the need to reconfigure every host whenever changes in network topology occur.
- **Network Address Translation (NAT)** - For small office environments, the router allows multiple users on the LAN to access the Internet concurrently through a single Internet account. This provides Internet access to everyone in the office for the price of a single user. NAT improves network security in effect by hiding the private network behind one global and visible IP address. NAT address mapping can also be used to link two IP domains via a LAN-to-LAN connection.
- **Precise ATM Traffic Shaping** - Traffic shaping is a method of controlling the flow rate of ATM data cells. This function helps to establish the Quality of Service for ATM data transfer.
- **High Performance ADSL** - Very high rates of data transfer are possible with the router. Up to 24Mbps downstream bit rate using the G.dmt standard. (For ADSL2+)
- **Easy Installation** - The router uses a web-based graphical user interface program for convenient management access and easy set up. Any common web browsing software can be used to manage this router.
- **USB Support**- The router provides a USB port to easily share files and printers. The router supports a USB storage option that shares files through a SAMBA file server and in addition also supports sharing USB printers to network members. Please note that the USB storage device is not included in this package and must be bought separately.
- **Online Firmware Checker** - The router provides a method to check if there is any updated firmware of the router on D-Link support website.
- **Multiple PVCs** - The router provides five PVCs to offer different services.

* Maximum wireless signal rate derived from IEEE standard 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.








Hardware Overview

Front Panel

Number	Description
	WPS - The light will flash while a WPS connection is being established. The light will light solid for 5 seconds if a successful WPS connection has been made. This is also the WPS button used to initiate the push-button WPS connection.
	Internet - Steady green light indicates a successful Internet connection. Steady red light indicates failed Internet connection. Dark if no WAN protocol is configured.
	DSL - Steady green light indicates a valid ADSL connection. This will light after the ADSL negotiation process has been settled. A blinking green light indicates activity on the WAN (ADSL) interface.
	USB 3.0 - Steady green light indicates a successful USB connection. Dark if no USB device is connected.
	USB 2.0 - Steady green light indicates a successful USB connection. Dark if no USB device is connected.
	2.4GHz WLAN - Steady green light indicates the 2.4GHz WLAN is available.
	5GHz WLAN - Steady green light indicates the 5GHz WLAN is available.
	LAN - A solid light indicates a valid link on startup. This light will blink when there is activity currently passing through the Ethernet port. A green light will be illuminated for a 10/100Mbps connection and an amber light will be illuminated for a 1000Mbps connection.
	Power - A steady green light indicates the unit is powered on. When the device is powered off this remains dark. During the Power-On Self-Test this light will be red. If this light remains red after the POST, a malfunction has occurred.




Rear Panel

Number	Description
 DSL	ADSL Port - Use the DSL cable to connect to your telephone line (RJ-11 port).
 USB 3.0	USB (3.0) Port - Use the USB 3.0 port to connect your USB 3.0 device.
 USB	USB (2.0) Port - Use the USB 2.0 port to connect your USB 2.0 device.
 1	Ethernet Ports - Use the Ethernet ports to connect the router to your Ethernet LAN or Ethernet devices.
 WIFI ON/OFF	Wireless On/Off Switch Button - Please press and hold on for 3 seconds to turn on/turn off.
 POWER ON/OFF	Power Button - Push in to power-on the router. Push again to power-off the router.
 12V=2.5A	Power Receptor - Receptor for the supplied power adapter.



Bottom Panel

Number	Description
	Reset Button - Press and hold the button for 10-15 seconds to restore the device to its original factory default settings.



Basic Installation

This section will walk you through the installation process. Placement of the router is very important. Do not place the router in an enclosed area such as a closet, cabinet, or in the attic or garage.

Before You Begin

Please read and make sure you understand all the prerequisites for proper installation of your new router. Have all the necessary information and equipment on hand before beginning the installation.

Installation Notes

In order to establish a connection to the Internet it will be necessary to provide information to the router that will be stored in its memory. For some users, only their account information (Username and Password) is required. For others, various parameters that control and define the Internet connection will be required.

Low Pass Filters

Since ADSL and telephone services share the same copper wiring to carry their respective signals, a filtering mechanism may be necessary to avoid mutual interference. A low pass filter device can be installed for each telephone that shares the line with the ADSL line. These filters are easy to install passive devices that connect to the ADSL device and/or telephone using standard telephone cable. Ask your service provider for more information about the use of low pass filters with your installation.

Operating Systems

The router uses an HTML-based web interface for setup and management. The Web configuration manager may be accessed using any operating system capable of running web browser software, including Windows[®], Macintosh, and Linux-based Operating Systems.

Web Browser

Any common Web browser can be used to configure the router using the Web configuration management software. The program is designed to work best with more recently released browsers such as Internet Explorer 7 or higher, Firefox 3.5 or higher, Safari 4 or higher, or Chrome 8 or higher.. The Web browser must have JavaScript enabled. JavaScript is enabled by default on many browsers. Make sure JavaScript has not been disabled by other software (such as virus protection or web user security packages) that may be running on your computer.

Ethernet Port (NIC Adapter)

Any computer that uses the router must be able to connect to it through one of the Ethernet ports on the router. This connection is an Ethernet connection and therefore requires that your computer be equipped with an Ethernet port as well. Most notebook computers are now sold with an Ethernet port already installed. Likewise, most fully assembled desktop computers come with an Ethernet adapter as standard equipment. If your computer does not have an Ethernet port, you must install an Ethernet NIC adapter before you can use the router. If you must install an adapter, follow the installation instructions that come with the Ethernet NIC adapter.

Additional Software

It may be necessary to install software on your computer that enables the computer to access the Internet. Additional software must be installed if you are using the device a simple bridge. For a bridged connection, the information needed to make and maintain the Internet connection is stored on another computer or gateway device, not in the router itself.

If your ADSL service is delivered through a PPPoE connection, the information needed to establish and maintain the Internet connection can be stored in the router. In this case, it is not necessary to install software on your computer. It may however be necessary to change some settings in the device, including account information used to identify and verify the connection.

All connections to the Internet require a unique global IP address. For bridged connections, the global IP settings must reside in a TCP/IP enabled device on the LAN side of the bridge, such as a PC, a server, a gateway device such as a router or similar firewall hardware. The IP address can be assigned in a number of ways. Your network service provider will give you instructions about any additional connection software or NIC configuration that may be required.

Information needed from ADSL service provider

Username

This is the Username used to log on to your ADSL service provider's network. Your ADSL service provider uses this to identify your account.

Password

This is the Password used, in conjunction with the Username above, to log on to your ADSL service provider's network. This is used to verify the identity of your account.

WAN Setting / Connection Type

These settings describe the method your ADSL service provider uses to transport data between the Internet and your computer. Most users will use the default settings. You may need to specify one of the following WAN Setting and Connection Type configurations (Connection Type settings listed in parenthesis):

- Static IP Address (1483 Routed IP LLC or 1483 Routed IP VC-Mux)
- DHCP (1483 Routed IP LLC or 1483 Routed IP VC-Mux)
- PPPoE (PPPoE LLC or PPPoE VC-Mux)
- PPPoA (PPPoA LLC or PPPoA VC-Mux)
- Bridge Mode (1483 Bridged IP LLC or 1483 Bridged IP VC Mux)

Modulation Type

ADSL uses various standardized modulation techniques to transmit data over the allotted signal frequencies. Some users may need to change the type of modulation used for their service. The default DSL modulation (Autosense) used for the router automatically detects all types of ADSL, ADSL2, and ADSL2+ modulation.

Security Protocol

This is the method your ADSL service provider will use to verify your Username and Password when you log on to their network. Your router supports the PAP and CHAP protocols.

VPI

Most users will not be required to change this setting. The Virtual Path Identifier (VPI) is used in conjunction with the Virtual Channel Identifier (VCI) to identify the data path between your ADSL service provider's network and your computer. If you are setting up the router for multiple virtual connections, you will need to configure the VPI and VCI as instructed by your ADSL service provider for the additional connections. This setting can be changed in the WAN Settings window of the web management interface.

VCI

Most users will not be required to change this setting. The Virtual Channel Identifier (VCI) used in conjunction with the VPI to identify the data path between your ADSL service provider's network and your computer. If you are setting up the router for multiple virtual connections, you will need to configure the VPI and VCI as instructed by your ADSL service provider for the additional connections. This setting can be changed in the WAN Settings window of the web management interface.

Information needed about this Router

Username

This is the Username needed access the router's web management interface. When you attempt to connect to the device through a web browser you will be prompted to enter this Username. The default Username for the router is **"admin"**.

Password

This is the Password you will be prompted to enter when you access the router's web management interface. The default Password is **"admin"**.

LAN IP Addresses for the Router

This is the IP address you will enter into the Address field of your web browser to access the router's configuration Graphical User Interface (GUI) using a web browser. The default IP address is **192.168.1.1**. This may be changed to suit any IP address scheme the user desires. This address will be the base IP address used for DHCP service on the LAN when DHCP is enabled.

LAN Subnet Mask for the Router

This is the subnet mask used by the router, and will be used throughout your LAN. The default subnet mask is **255.255.255.0**. This can be changed later.

Information needed about your LAN or computer

Ethernet NIC

If your computer has an Ethernet NIC, you can connect the router to this Ethernet port using an Ethernet cable. You can also use the Ethernet ports on the router to connect to other computer or Ethernet devices.

DHCP Client status

Your ADSL router is configured, by default, to be a DHCP server. This means that it can assign an IP address, subnet mask, and a default gateway address to computers on your LAN. The default range of IP addresses the router will assign are from **192.168.1.2 to 192.168.1.254**. Your computer (or computers) needs to be configured to obtain an IP address automatically (that is, they need to be configured as DHCP clients.)

Once you have the above information, you are ready to setup and configure your ADSL router.

Device Installation

The router connects two separate physical interfaces, an ADSL (WAN) and an Ethernet (LAN) interface. Place the router in a location where it can be connected to the various devices as well as to a power source. The router should not be located where it will be exposed to moisture or excessive heat. Make sure the cables and power cord are placed safely out of the way so they do not create a tripping hazard. As with any electrical appliance, observe common sense safety procedures.

The router can be placed on a shelf or desktop, ideally you should be able to see the LED indicators on the front if you need to view them for troubleshooting.

Power on Router

The router must be used with the power adapter included with the device.

1. Insert the AC Power Adapter cord into the power receptacle located on the rear panel of the router and plug the adapter into a suitable nearby power source.
2. Press the Power button into the on position. You should see the Power LED indicator light up and remain lit.
3. If the Ethernet port is connected to a working device, check the Ethernet LED indicators to make sure the connection is valid. The router will attempt to establish the ADSL connection, if the ADSL line is connected and the router is properly configured this should light up after several seconds. If this is the first time installing the device, some settings may need to be changed before the router can establish a connection.

Factory Reset Button

The router may be reset to the original factory default settings by using a ballpoint pen or paperclip to gently push down the reset button in the following sequence:

1. Press and hold the reset button while the device is powered on for 10-15 seconds.
2. Release the reset button.

Remember that this will wipe out any settings stored in flash memory including user account information and LAN IP settings. The device settings will be restored to the factory default IP address **192.168.1.1** and the subnet mask is **255.255.255.0**. The default management username is "**admin**" and the default password is "**admin**".

Network Connections

Connect ADSL Line

Use the ADSL cable included with the router to connect it to a telephone wall socket or receptacle. Plug one end of the cable into the ADSL port (RJ-11 receptacle) on the rear panel of the router and insert the other end into the RJ-11 wall socket. If you are using a low pass filter device, follow the instructions included with the device or given to you by your service provider. The ADSL connection represents the WAN interface, the connection to the Internet. It is the physical link to the service provider's network backbone and ultimately to the Internet.

Connect Router to Ethernet

The router may be connected to a single computer or Ethernet device through the Ethernet ports on the rear panel. Any connection to an Ethernet concentrating device such as a switch or hub must operate at a speed of 10/100/1000Mbps. When connecting the router to any Ethernet device that is capable of operating at speeds higher than 10Mbps, be sure that the device has auto-negotiation (NWay) enabled for the connecting port. Use standard twisted-pair cable with RJ-45 connectors. The RJ-45 ports on the router are a crossed port (MDI-X). Follow standard Ethernet guidelines when deciding what type of cable to use to make this connection. When connecting the router directly to a PC or server use a normal straight-through cable. You should use a crossed cable when connecting the router to a normal (MDI-X) port on a switch or hub. Use a normal straight-through cable when connecting it to an uplink (MDI-II) port on a hub or switch. The rules governing Ethernet cable lengths apply to the LAN to router connection. Be sure that the cable connecting the LAN to the router does not exceed 100 meters.

Hub or Switch to Router Connection

Connect the router to an uplink port (MDI-II) on an Ethernet hub or switch with a straight-through cable. If you wish to reserve the uplink port on the switch or hub for another device, connect to any on the other MDI-X ports (1x, 2x, etc.) with a crossed cable.

Computer to Router Connection

You can connect the router directly to an Ethernet adapter card (NIC) installed on a PC using the Ethernet cable provided.

Getting Started

This section will show you how to set up and configure your new D-Link router using the Web-based configuration utility.

How to connect to the Web User Interface


Connect to the Router

To configure the WAN connection used by the router it is first necessary to communicate with the router through its management interface, which is HTML-based and can be accessed using a web browser. The easiest way to make sure your computer has the correct IP settings is to configure it to use the DHCP server in the router.

To access the web user interface, open a web-browser such as Internet Explorer and enter the IP address of the router (**192.168.1.1**) into the address bar and press the *Enter* key on your keyboard.



The User Name field will display "**admin**". Enter "**admin**" in the Password field and click the **Login** button to proceed. If you get a *Page Cannot be Displayed* error, please refer to the Troubleshooting section for assistance.

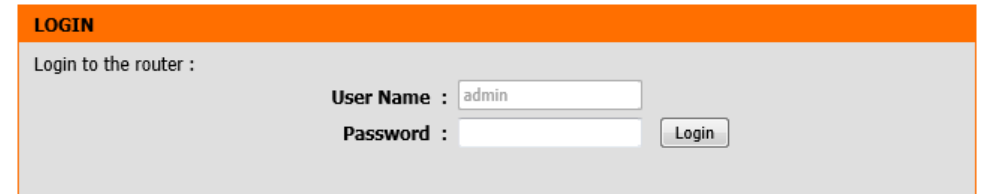

First Time Installation

The **D-Link Setup Wizard** will be initiated when a user logs into the router's Web User Interface (Web UI) for the first time. It is designed to assist users with an easy step-by-step installation procedure, configuring the basic features found on this router.

Welcome to the D-Link Setup Wizard

On this page, we can read through the steps that will be used for this wizard.

Click the **Next** button to continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main menu.




Step 1: Configure Your Internet Connection

Connect the one end of the Internet telephone cable (RJ-11) into the Internet port of the router and make sure the other end is connected to the DSL connection point.

Click the **Connect** button to initiate the Internet connection test.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

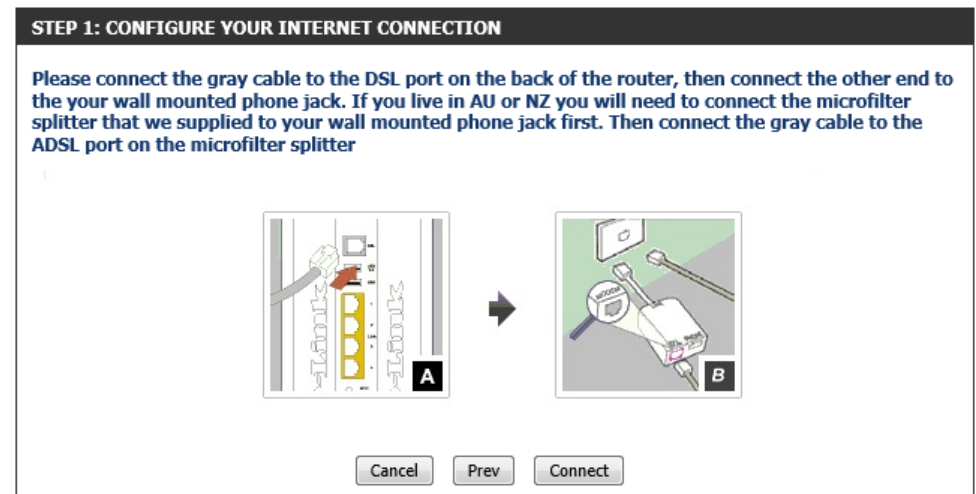

On this page, the router is testing the Internet connectivity from the DSL provider.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

STEP 1: CONFIGURE YOUR INTERNET CONNECTION

Routers is detecting your Internet connection type, please wait...

Cancel Prev Next

After the DSL synchronization test has passed, we can select an Internet connection type from the list provided. In this section, we can configure the following:

Country: Select your country from the drop-down menu. After selecting your country from the drop-down menu, the VPI and VCI parameters will automatically be selected for your country.

VPI: Enter the Virtual Path Identifier (VPI) value here.

VCI: Enter the Virtual Circuit Identifier (VCI) value here.

Encapsulation: Select the encapsulation method here. Options to choose from are **LLC** and **VC MUX**.

DHCP Connection (Dynamic IP Address): Select this option when your Internet connection can be made automatically. When selecting this option, this wizard will automatically continue to step 2.

Username / Password Connection (PPPoE): Select this option when your Internet connection requires a username and a password. For DSL connections, use this option.

Username / Password Connection (PPPoA): Select this option when your Internet connection requires a PPPoA username and password.

Static IP Address Connection: Select this option when your Internet connection requires an IP address, Default Gateway IP address, and DNS IP addresses.

Bridge Connection: Select this option to use this device as a bridging device between your LAN and the ISP. When selecting this option, this wizard will automatically continue to step 2.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

STEP 1: CONFIGURE YOUR INTERNET CONNECTION

Configure an ATM PVC identifier

Country : Not Listed

VPI : 8

VCI : 35

Encapsulation : LLC VC MUX

Please select the Internet connection type below:

DHCP Connection (Dynamic IP Address)
Choose this if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.

Username / Password Connection (PPPoE)
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this type of connection.

Username / Password Connection (PPPoA)
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this type of connection.

Static IP Address Connection
Choose this option if your Internet Setup Provider provided you with IP Address information that has to be manually configured.

Bridge Connection
Choose this option if the modem can be configured to act as a bridging device between your LAN and your ISP.

Cancel Prev Next

After selecting to use the **Username/Password Connection (PPPoE)**, the following page will be available. In this section, we can configure the following:

User Name: Enter the PPPoE username here.

Password: Enter the PPPoE password here.

Note: This information is usually supplied by the Internet Service Provider (ISP).

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET USERNAME AND PASSWORD CONNECTION (PPPOE)

To set up this connection you will need to have a Username and Password from your Internet Service Provider. If you do not have this information, please contact your ISP.

User Name :

Password :

After selecting to use the **Username/Password Connection (PPPoA)**, the following page will be available. In this section, we can configure the following:

User Name: Enter the PPPoA username here.

Password: Enter the PPPoA password here.

Note: This information is usually supplied by the Internet Service Provider (ISP).

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET USERNAME AND PASSWORD CONNECTION (PPPOA)

To set up this connection you will need to have a Username and Password from your Internet Service Provider. If you do not have this information, please contact your ISP.

User Name :

Password :

After selecting to use the **Static IP Address Connection**, the following page will be available. In this section, we can configure the following:

IP Address: Enter the WAN static IP address here.

Subnet Mask: Enter the WAN subnet mask here.

Gateway Address: Enter the WAN gateway IP address here.

Primary DNS Address: Enter the primary DNS IP address here.

Secondary DNS Address: Enter the secondary DNS IP address here. This field is optional.

Note: This information is usually supplied by the ISP.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET STATIC IP ADDRESS CONNECTION

To set up this connection you will need to have a complete list of IP information provided by your Internet Service Provider. If you have a Static IP connection and do not have this information, please contact your ISP.

IP Address :

Subnet Mask :

Gateway Address :

DNS SETTINGS

Primary DNS Address :

Secondary DNS Address :

Step 2: Configure Your Wi-Fi Security

After configuring the Internet connection, we can configure the wireless connectivity used on this router. In this section, we can configure the following:

Wi-Fi Network Name: Enter the wireless network name (SSID) here. Remember to use separate SSIDs for the 2.4GHz and 5GHz connections, to prevent confusion. These SSIDs are used by wireless clients to connect to this router. When wireless clients scan for available wireless networks, these names will appear.

Wi-Fi Password: Enter the wireless password here. By default, the wireless security method used is WPA/WPA2-Personal with both TKIP and AES cipher types. When wireless clients connect to your wireless network, this password needs to be entered for a successful connection.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

Step 3: Set Your Password

After configuring the wireless connectivity, we can configure the Web UI login password for his router. In this section, we can configure the following:

Password: Enter the new Web UI login password here.

Verify Password: Enter the new Web UI login password here again.

Enable Graphical Authentication: Tick this option to enable the graphical authentication method. This is optional added security.

Note: For security, it is highly recommended to change the default login password for this router. The username cannot be changed.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

STEP 2: CONFIGURE YOUR WI-FI SECURITY

Give your Wi-Fi network a name and a password. (2.4GHz Band)

Wi-Fi Network Name (SSID) :
 (Using up to 32 characters)

Wi-Fi Password :
 (Between 8 and 63 characters)

Give your Wi-Fi network a name and a password. (5GHz Band)

Wi-Fi Network Name (SSID) :
 (Using up to 32 characters)

Wi-Fi Password :
 (Between 8 and 63 characters)

STEP 3: SET YOUR PASSWORD

To secure your new networking device, please set and verify a password below, and enabling CAPTCHA Graphical Authentication provides added security protection to prevent unauthorized online users and hacker software from accessing your network settings.

Password :

Verify Password :

Enable Graphical Authentication :

Step 4: Select Your Time Zone

After configuring the Web UI login details, we can configure the time zone used by this router. In this section, we can configure the following:

Time Zone: Select the time zone that should be used by this router. This will be used by the time and date configuration later on in this manual.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

Step 5: Confirm Wi-Fi Settings

After configuring the time zone, we can view a summary of the Wi-Fi settings for confirmation.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

After clicking the **Next** button, the settings will be saved and Internet connectivity will be attempted.

After this, the **D-Link Setup Wizard** will be completed and the user will be navigated to the main Web UI page.

When the Internet connection is ready, the router will proceed to the mydlink™ registration in step 6. When the Internet connection is not ready, a pop-up window will be displayed to remind the user to restart or quit the Setup Wizard.

STEP 4: SELECT YOUR TIME ZONE

Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.

▼
(GMT+10:00) Canberra, Melbourne, Sydney

STEP 5: CONFIRM WI-FI SETTINGS

Below is a detailed summary of your Wi-Fi security settings. Please print this page out, or write the information on a piece of paper, so you can configure the correct settings on your Wi-Fi devices.

Wi-Fi Network Name (SSID) 2.4GHz : D-Link DSL-2890AL
Wi-Fi Password : wifipassword

Wi-Fi Network Name (SSID) 5GHz : D-Link DSL-2890AL_5GHz
Wi-Fi Password : wifipassword

SAVING SETTINGS

Your settings are being saved.


Please wait...

Checking internet connectivity.

If no Internet connection was detected, the user can restart the D-Link Setup Wizard or be navigated to the main Web UI page.

Click the **OK** button to restart the D-Link Setup Wizard.


Click the **Cancel** button to navigate to the main Web UI page.

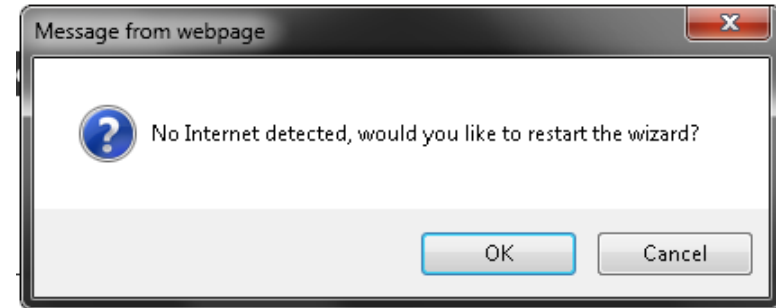

Step 6: mydlink Registration

If the Internet connection was successfully detected, the following page will be available. Please refer to [mydlink™ Settings](#) on page 94 for more information.

After this, the D-Link Setup Wizard will be completed and the user will be navigated to the main Web UI page.

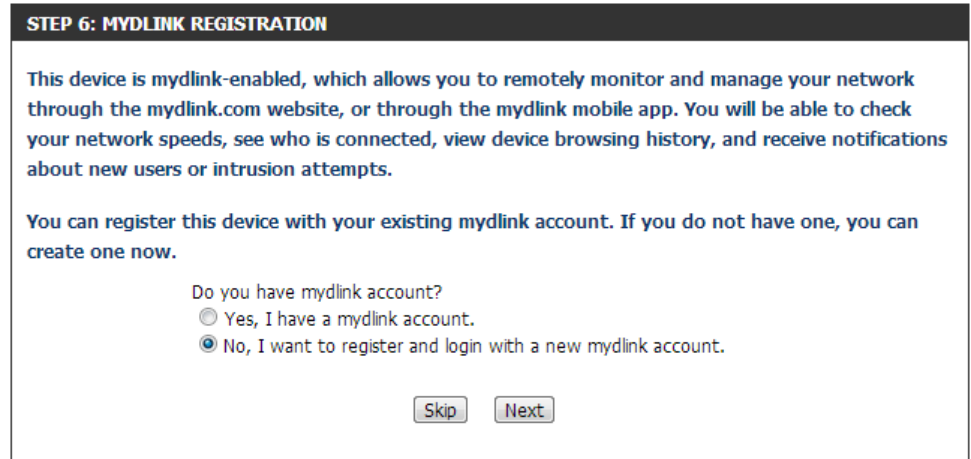

Web User Interface Configuration

After successfully logging into the Web User Interface, the following page will be displayed. This page is divided into clickable components that make the configuration of this device easier and more understandable.

The top menu lists out the **Categories** available for configuration. The categories available to configure on this device are **Setup**, **Advanced**, **Maintenance**, **Status** and **Help**.

The left menu lists out the **Pages** available, for each individual category, for configuration. In this example, we observe the pages available in the **Setup** category. The pages available here are **Internet**, **Wireless Settings**, **Network Settings**, **Storage**, **Media Server**, **IPv6**, and **mydlink™ Settings**.

Product Page : DSL-2890AL Site Map Firmware Version : AU_1.02.04
Build Timestamp : 01212014

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET WIRELESS SETTINGS NETWORK SETTINGS STORAGE MEDIA SERVER IPV6 MYDLINK SETTINGS LOGOUT

INTERNET CONNECTION

If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard, and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup.

INTERNET CONNECTION SETUP WIZARD

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

MANUAL INTERNET CONNECTION OPTION

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Helpful Hints...

- If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to input all the settings manually.
- [More...](#)

BROADBAND

Setup Category

The **Setup** category is designed to assist the user with essential configurations, concerning the initial setup of this product.

The following pages can be found in the **Setup** category:

- **Internet** - On this page we can configure services related to the Internet connectivity of this product.
- **Wireless Settings** - On this page we can configure services related to the Wireless connectivity of this product.
- **Network Settings** - On this page we can configure services related to the Local Area Network connectivity of this product.
- **Storage** - On this page we can configure services related to the storage media and services used by this product.
- **Media Server** - On this page we can configure the DLNA media server and iTunes server used by this product.
- **IPv6** - On this page we can configure services related to the IPv6 connectivity of this product.
- **mydlink™ Settings** - On this page we can configure the mydlink™ settings used by this product.

Product Page : DSL-2890AL Site Map Firmware Version : AU_1.02.04
Build Timestamp : 01212014

D-Link

DSL-2890AL //	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
INTERNET	INTERNET CONNECTION				Helpful Hints... <ul style="list-style-type: none"> • If you are new to networking and have never configured a router before, click on Internet Connection Setup Wizard and the router will guide you through a few simple steps to get your network up and running. • If you consider yourself an advanced user and have configured a router before, click Manual Internet Connection Setup to input all the settings manually. • More...
WIRELESS SETTINGS	INTERNET CONNECTION SETUP WIZARD If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below. <div style="text-align: center;"><input type="button" value="Internet Connection Setup Wizard"/></div>				
NETWORK SETTINGS	Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.				
STORAGE	MANUAL INTERNET CONNECTION OPTION If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below. <div style="text-align: center;"><input type="button" value="Manual Internet Connection Setup"/></div>				
MEDIA SERVER	BROADBAND				
IPv6					
MYDLINK SETTINGS					
LOGOUT					

Internet

To access the **Internet** page, click on the **Setup** menu link, at the top, and then click on the **Internet** menu link, on the left.

On this page we can configure services related to the Internet connectivity of this product.

The screenshot displays the D-Link web interface for the DSL-2890AL modem router. The top navigation bar includes 'DSL-2890AL //', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various configuration options: 'INTERNET', 'WIRELESS SETTINGS', 'NETWORK SETTINGS', 'STORAGE', 'MEDIA SERVER', 'IPV6', and 'MYLINK SETTINGS'. The main content area is titled 'INTERNET CONNECTION' and contains the following sections:

- INTERNET CONNECTION**: A general introduction stating that for first-time configuration, the Internet Connection Setup Wizard is recommended, with a button for 'Manual Internet Connection Setup'.
- INTERNET CONNECTION SETUP WIZARD**: A section explaining the wizard's purpose and providing a button for 'Internet Connection Setup Wizard'. A note below states: "Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package."
- MANUAL INTERNET CONNECTION OPTION**: A section for manual configuration, with a button for 'Manual Internet Connection Setup'.


On the right side, there is a 'Helpful Hints...' section with the following text:

- If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to input all the settings manually.
- [More...](#)

Internet Connection Setup Wizard

Click the **Internet Connection Setup Wizard** button to initiate the Internet connection setup wizard.

After clicking the **Internet Connection Setup Wizard** button, the following page will be available.

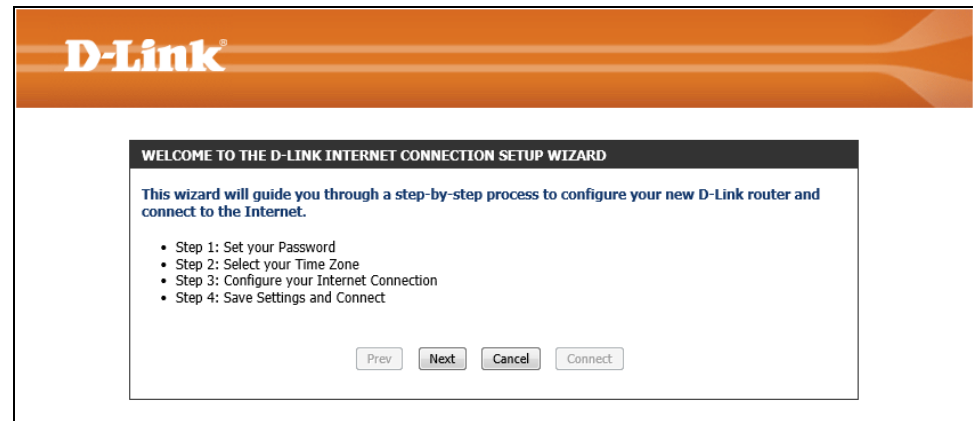


Welcome to the D-Link Internet Connection Setup Wizard

This wizard will guide user through a step-by-step wizard, divided into 4 steps, to configure the Internet connectivity used by this router.

Click the **Next** button to continue to the next page.

Click the **Cancel** button to discard the changes made and return to the main page.

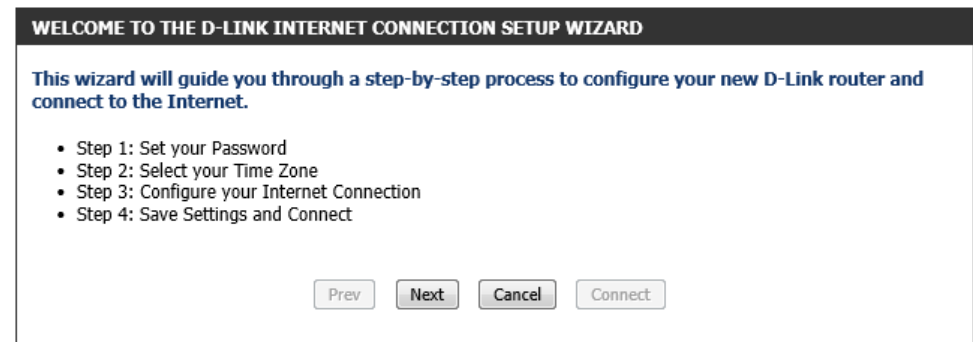

Step 1: Set Your Password

On this page we can configure the Web UI login password for his router. In this section, we can configure the following:

Password: Enter the new Web UI login password here.

Verify Password: Enter the new Web UI login password here again.

Note: For security, it is highly recommended to change the default login password for this router. The username cannot be changed.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

Step 2: Select Your Time Zone

After configuring the Web UI login details, we can configure the time zone used by this router. In this section, we can configure the following:

Time Zone: Select the time zone that should be used by this router. This will be used by the time and date configuration later on in this manual.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

The screenshot shows a configuration page titled "STEP 1: SET YOUR PASSWORD". Below the title, there is a blue text block stating: "By default, your new D-Link Router does not have a password configured for administrator access to the Web-based configuration pages. To secure your new networking device, please set and verify a password below:". There are two input fields: "Password" and "Verify Password", both containing five black dots. Below the input fields are four buttons: "Prev", "Next", "Cancel", and "Connect".

The screenshot shows a configuration page titled "STEP 2: SELECT YOUR TIME ZONE". Below the title, there is a blue text block stating: "Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.". There is a dropdown menu labeled "Time Zone" with the selected option "(GMT+10:00) Canberra, Melbourne, Sydney". Below the dropdown menu are four buttons: "Prev", "Next", "Cancel", and "Connect".

Step 3: Configure Your Internet Connection

After configuring the time zone, we can select an Internet connection type from the list provided. In this section, we can configure the following:

Country: Select your country from the drop-down menu. After selecting your country from the drop-down menu, the VPI and VCI parameters will automatically be selected for your country.

VPI: Enter the Virtual Path Identifier (VPI) value here.

VCI: Enter the Virtual Circuit Identifier (VCI) value here.

DHCP Connection (Dynamic IP Address): Select this option when your Internet connection can be made automatically. When selecting this option, this wizard will automatically continue to step 2.

Username / Password Connection (PPPoE): Select this option when your Internet connection requires a username and a password. For DSL connections, use this option.

Username / Password Connection (PPPoA): Select this option when your Internet connection requires a PPPoA username and password.

Static IP Address Connection: Select this option when your Internet connection requires an IP address, Default Gateway IP address, and DNS IP addresses.

Bridge Connection: Select this option to use this device as a bridging device between your LAN and the ISP. When selecting this option, this wizard will automatically continue to step 2.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

STEP 3: CONFIGURE YOUR INTERNET CONNECTION

Configure an ATM PVC identifier

Country : ▼

VPI :

VCI :

Encapsulation : LLC VC MUX

Please select the Internet connection type below:

DHCP Connection (Dynamic IP Address)
Choose this if your Internet connection automatically provides you with an IP Address. Most Cable Modems use this type of connection.

Username / Password Connection (PPPoE)
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this type of connection.

Username / Password Connection (PPPoA)
Choose this option if your Internet connection requires a username and password to get online. Most DSL modems use this type of connection.

Static IP Address Connection
Choose this option if your Internet Setup Provider provided you with IP Address information that has to be manually configured.

Bridge Connection
Choose this option if the modem can be configured to act as a bridging device between your LAN and your ISP.

After selecting to use the **DHCP Connection (Dynamic IP Address)** connection method, the following page will be available. In this section, we can configure the following:

MAC Address: Enter the MAC address used for the Internet connection here. Alternatively, click the **Clone Your PC's MAC Address** button to use the PC's MAC address that was originally used to connect to the Internet before the purchase of this router.

Host Name: Enter the host name used for the Internet connection here.

Primary DNS Address: Enter the primary DNS IP address here.

Secondary DNS Address: Enter the secondary DNS IP address here. This field is optional.

Note: This information is usually supplied by the ISP.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

After selecting to use the **Username/Password Connection (PPPoE)** connection method, the following page will be available. In this section, we can configure the following:

User Name: Enter the PPPoE username here.

Password: Enter the PPPoE password here.

Note: This information is usually supplied by the Internet Service Provider (ISP).

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

DHCP CONNECTION (DYNAMIC IP ADDRESS)

To set up this connection, please make sure that you are connected to the D-Link Router with the PC that was originally connected to your broadband connection. If you are, then click the Clone MAC button to copy your computer's MAC Address to the D-Link Router.

MAC Address : (optional)

Host Name :

Note: You may also need to provide a Host Name.If you do not have or know this information, please contact your ISP.

DNS SETTINGS

Primary DNS Address :

Secondary DNS Address : (optional)

SET USERNAME AND PASSWORD CONNECTION (PPPOE)

To set up this connection you will need to have a Username and Password from your Internet Service Provider. If you do not have this information, please contact your ISP.

User Name :

Password :

After selecting to use the **Username/Password Connection (PPPoA)** connection method, the following page will be available. In this section, we can configure the following:

User Name: Enter the PPPoA username here.

Password: Enter the PPPoA password here.

Note: This information is usually supplied by the Internet Service Provider (ISP).

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET USERNAME AND PASSWORD CONNECTION (PPPOA)

To set up this connection you will need to have a Username and Password from your Internet Service Provider. If you do not have this information, please contact your ISP.

User Name :

Password :

After selecting to use the **Static IP Address Connection** method, the following page will be available. In this section, we can configure the following:

IP Address: Enter the WAN static IP address here.

Subnet Mask: Enter the WAN subnet mask here.

Gateway Address: Enter the WAN gateway IP address here.

Primary DNS Address: Enter the primary DNS IP address here.

Secondary DNS Address: Enter the secondary DNS IP address here. This field is optional.

Note: This information is usually supplied by the ISP.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET STATIC IP ADDRESS CONNECTION

To set up this connection you will need to have a complete list of IP information provided by your Internet Service Provider. If you have a Static IP connection and do not have this information, please contact your ISP.

IP Address :

Subnet Mask :

Default Gateway :

DNS SETTINGS

Primary DNS Address :

Secondary DNS Address : (optional)

Setup Complete

After clicking the **Next** button, the following page will be available. On this page we can view a confirmation message, confirming that the D-Link Internet Connection Setup Wizard is completed.



Click the **Connect** button to initiate an attempt to connect to the Internet using the settings configured throughout this wizard.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

Manual Internet Connection Option

Click the **Manual Internet Connection Setup** button to navigate to the Internet Connection Setup page to manually configure the Internet Connection.

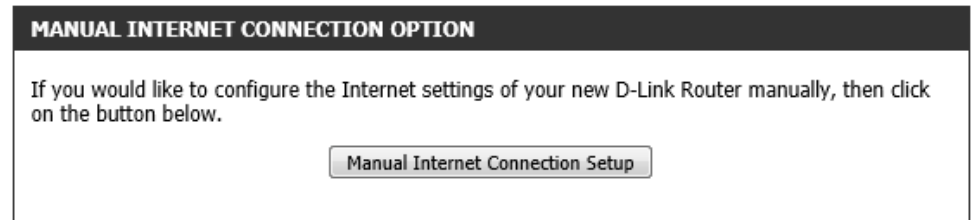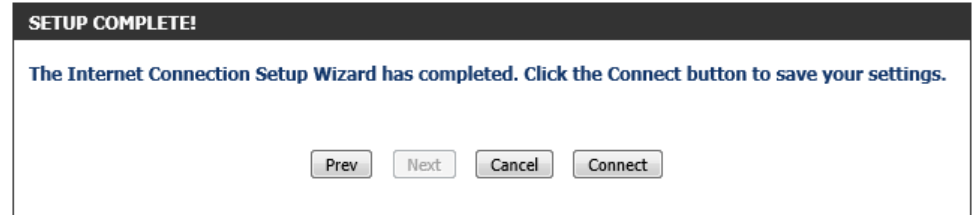

After clicking the **Manual Internet Connection Setup** button, the following page will be available.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET
WIRELESS SETTINGS
NETWORK SETTINGS
STORAGE
MEDIA SERVER
IPv6
MYDLINK SETTINGS
LOGOUT

WAN

Use this section to configure your DSL ATM interface and Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPPoA and Bridge. If you are unsure of your connection method, please contact your Internet Service Provider.

Note : If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings Don't Save Settings

WAN CONNECTION TYPE

DSL-2890AL could be a ADSL Router that use ADSL as uplink interface or Residential Gateway that use one Ethernet port as upline interface.

ADSL Router Residential Gateway (NBN/UFB Mode)

DSL SETTING

Modulation : Auto

Bitswap :

SRA :

ATM SETTING

Interface : PVC1 (8/35)

Country : Not Listed

VPI : 8

VCI : 35

Latency : Path0

Encapsulation : LLC VC MUX

ATM QoS : UBR Without PCR

Helpful Hints...

- Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct **Internet Connection Type** from the drop down menu. If you are unsure of which option to choose, please contact your **Internet Service Provider (ISP)**.
- Support:** If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.
- More...**

In this section we can configure the WAN connection type. Parameters available for configuration are the following:

ADSL Router: Select this option to use this router as an ADSL router, directly connecting the ADSL telephone line, using the Internet port.

Residential Gateway (NBN/UFB Mode): Select this option to allow this router to connect to the Internet using one of the LAN ports to function as a WAN port and connect to another Internet connection device like a Cable Modem.

WAN CONNECTION TYPE

DSL-2890AL could be a ADSL Router that use ADSL as uplink interface or Residential Gateway that use one Ethernet port as upline interface.

ADSL Router Residential Gateway (NBN/UFB Mode)

After selecting to use the **Residential Gateway (NBN/UFB Mode)** WAN connection type, the following parameters will be available for configuration:

WAN Port: Select the LAN port that will be used as the WAN port. Connect the external Internet connection device, like a Cable Modem, to this port by means of an Ethernet cable.

Note: After selecting this option, the only Internet connection method that can be used is the **Dynamic IP Address** connection method. This router will obtain WAN IP credentials automatically from the external Internet connection device. To enable DHCP on the external Internet connection device, contact the manufacturer of this device for assistance.

In this section, we can configure the DSL settings. Parameters available for configuration are the following:

Modulation: Select the DSL modulation type used here. Options to choose from are **Auto**, **G.Dmt**, **G.lite**, **T1.413**, **ADSL2**, **AnnexL**, **ADSL2+**, and **AnnexM**. By default this parameters is set as **Auto**. This is the recommended option.

Bitswap: Tick this option to enable the bit swap feature.

SRA: Tick this option to enable the Seamless Rate Adaptation (SRA) feature.

In this section, we can configure the ATM settings. Parameters available for configuration are the following:

Interface: Select one of the pre-defined interfaces here.

Country: Select your country option from the drop-down menu. This will automatically change the VPI and VCI fields to match the country's settings.

VPI: Enter the Virtual Path Identifier (VPI) value here.

VCI: Enter the Virtual Circuit Identifier (VCI) value here.

Latency: Select the latency option here. Options to choose from are **Path0**, **Path1**, and **Path0 & Path1**.

Encapsulation: Select the encapsulation method used here. Options to choose from are **LLC** and **VC MUX**.

ATM QoS: Select the ATM Quality of Service (QoS) option here. Options to choose from are **UBR Without PCR**, **UBR With PCR**, **CBR**, **Non Realtime VBR**, and **Realtime VBR**.

WAN CONNECTION TYPE

DSL-2890AL could be a ADSL Router that use ADSL as uplink interface or Residential Gateway that use one Ethernet port as upline interface.

ADSL Router Residential Gateway (NBN/UFB Mode)

Wan Port :

DSL SETTING

Modulation :

Bitswap :

SRA :

ATM SETTING

Interface :

Country :

VPI :

VCI :

Latency :

Encapsulation : LLC VC MUX

ATM QoS :

After selecting **UBR With PCR** as the ATM QoS method, the following parameter will be available for configuration:

Peak Cell Rate: Enter the peak cell rate value here.

ATM SETTING

Interface : PVC1 (8/35) ▾

Country : Not Listed ▾

VPI : 8

VCI : 35

Latency : Path0 ▾

Encapsulation : LLC VC MUX

ATM QoS : UBR With PCR ▾

Peak Cell Rate : 0

After selecting **CBR** as the ATM QoS method, the following parameter will be available for configuration:

Peak Cell Rate: Enter the peak cell rate value here.

ATM SETTING

Interface : PVC1 (8/35) ▾

Country : Not Listed ▾

VPI : 8

VCI : 35

Latency : Path0 ▾

Encapsulation : LLC VC MUX

ATM QoS : CBR ▾

Peak Cell Rate : 0

After selecting **Non Realtime VBR** as the ATM QoS method, the following parameters will be available for configuration:

Peak Cell Rate: Enter the peak cell rate value here.

Sustainable Cell Rate: Enter the sustainable cell rate value here.

Maximum Burst Size: Enter the maximum burst size value here.

ATM SETTING

Interface : PVC1 (8/35) ▾

Country : Not Listed ▾

VPI : 8

VCI : 35

Latency : Path0 ▾

Encapsulation : LLC VC MUX

ATM QoS : Non Realtime VBR ▾

Peak Cell Rate : 0

Sustainable Cell Rate : 0

Maximum Burst Size : 0

After selecting **Realtime VBR** as the ATM QoS method, the following parameter will be available for configuration:

Peak Cell Rate: Enter the peak cell rate value here.

Sustainable Cell Rate: Enter the sustainable cell rate value here.

Maximum Burst Size: Enter the maximum burst size value here.

ATM SETTING

Interface : PVC1 (8/35) ▾

Country : Not Listed ▾

VPI : 8

VCI : 35

Latency : Path0 ▾

Encapsulation : LLC VC MUX

ATM QoS : Realtime VBR ▾

Peak Cell Rate : 0

Sustainable Cell Rate : 0

Maximum Burst Size : 0

Internet Connection Type – Static IP

In this section we can configure the Internet connection type. Parameters available for configuration are the following:

My Internet Connection is: Select the Internet connection type here. Options to choose from are **Static IP**, **Dynamic IP (DHCP)**, **PPPoE (Username/Password)**, **PPPoA (Username/Password)**, and **Bridge**. This section will explain the parameters that are available after selecting the **Static IP** option.

IP Address: Enter the WAN static IP address here.

Subnet Mask: Enter the WAN subnet mask here.

Default Gateway: Enter the WAN default gateway IP address here.

Primary DNS Address: Enter the primary DNS IP address here.

Secondary DNS Address: Enter the secondary DNS IP address here. This field is optional.

MTU: Enter the Maximum Transmission Unit (MTU) value here.

MAC Address: Enter the MAC address used for the Internet connection here. Alternatively, click the **Clone Your PC's MAC Address** button to use the PC's MAC address that was originally used to connect to the Internet before the purchase of this router.

Note: This information is usually supplied by the ISP.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is :

STATIC IP ADDRESS INTERNET CONNECTION TYPE :

Enter the static address information provided by your Internet Service Provider (ISP).

IP Address :

Subnet Mask :

Default Gateway :

Primary DNS Server :

Secondary DNS Server : (optional)

MTU :

MAC Address :

Internet Connection Type – Dynamic IP (DHCP)

In this section we can configure the Internet connection type. Parameters available for configuration are the following:

My Internet Connection is: Select the Internet connection type here. Options to choose from are **Static IP**, **Dynamic IP (DHCP)**, **PPPoE (Username/Password)**, **PPPoA (Username/Password)**, and **Bridge**. This section will explain the parameters that are available after selecting the **Dynamic IP (DHCP)** option.

Host Name: Enter the host name used for the Internet connection here.

Use Unicasting: Tick this option to use the unicasting method to connect to the DHCP server.

Primary DNS Address: Enter the primary DNS IP address here.

Secondary DNS Address: Enter the secondary DNS IP address here. This field is optional.

MTU: Enter the Maximum Transmission Unit (MTU) value here.

MAC Address: Enter the MAC address used for the Internet connection here. Alternatively, click the **Clone Your PC's MAC Address** button to use the PC's MAC address that was originally used to connect to the Internet before the purchase of this router.

Note: This information is usually supplied by the ISP.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is :

DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE :

Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.

Host Name :

Use Unicasting : (compatibility for some DHCP Servers)

Primary DNS Server :

Secondary DNS Server : (optional)

MTU :

MAC Address :

Internet Connection Type – PPPoE (Username/Password)

In this section we can configure the Internet connection type. Parameters available for configuration are the following:

My Internet Connection is: Select the Internet connection type here. Options to choose from are **Static IP**, **Dynamic IP (DHCP)**, **PPPoE (Username/Password)**, **PPPoA (Username/Password)**, and **Bridge**. This section will explain the parameters that are available after selecting the **PPPoE (Username/Password)** option.

Address Mode: Select the address mode here. Options to choose from are **Dynamic IP** and **Static IP**.

IP Address: After selecting the **Static IP** option as the **Address Mode**, enter the WAN IP address here.

Username: Enter the PPPoE username here.

Password: Enter the PPPoE password here.

Verify Password: Re-enter the PPPoE password here.

Service Name: Enter the service name here. This field is optional.

Reconnect mode: Select the re-connect mode here. Options to choose from are **Always On**, **On Demand**, and **Manual**. When selecting to use the **Always On** option, a schedule can be applied to the re-connect mode. To add a new schedule, click the **New Schedule** button.

Maximum Idle Time: After selecting **On Demand** as the **Reconnect Mode**, enter the maximum idle time value here. Entering the value 0 means infinite.

DNS Mode: Select the method that will be used to obtain DNS IP addresses here. Options to choose from are **Receive DNS from ISP** and **Enter DNS Manually**.

Primary DNS Address: After selecting the **Enter DNS Manually** option for the **DNS Mode**, enter the primary DNS IP address here.

Secondary DNS Address: After selecting the **Enter DNS Manually** option for the **DNS Mode**, enter the secondary DNS IP address here. This field is optional.

MTU: Enter the Maximum Transmission Unit (MTU) value here.

MAC Address: Enter the MAC address used for the Internet connection here. Alternatively, click the **Clone Your PC's MAC Address** button to use the PC's MAC address that was originally used to connect to the Internet before the purchase of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : PPPoE (Username / Password) ▾

PPPOE INTERNET CONNECTION TYPE :

Enter the information provided by your Internet Service Provider (ISP).

Address Mode : Dynamic IP Static IP

IP Address :

Username :

Password :

Verify Password :

Service Name : (optional)

Reconnect Mode : Always on ▾ New Schedule

On demand Manual

Maximum Idle Time : (minutes, 0=infinite)

DNS Mode : Receive DNS from ISP Enter DNS Manually

Primary DNS Server :

Secondary DNS Server : (optional)

MTU :

MAC Address :

Clone Your PC's MAC Address

Save Settings
Don't Save Settings

Internet Connection Type – PPPoA (Username/Password)

In this section we can configure the Internet connection type. Parameters available for configuration are the following:

My Internet Connection is: Select the Internet connection type here. Options to choose from are **Static IP**, **Dynamic IP (DHCP)**, **PPPoE (Username/Password)**, **PPPoA (Username/Password)**, and **Bridge**. This section will explain the parameters that are available after selecting the **PPPoA (Username/Password)** option.

Username: Enter the PPPoA username here.

Password: Enter the PPPoA password here.

Verify Password: Re-enter the PPPoA password here.

Service Name: Enter the service name here. This field is optional.

Reconnect mode: Select the re-connect mode here. Options to choose from are **Always On**, **On Demand**, and **Manual**. When selecting to use the **Always On** option, a schedule can be applied to the re-connect mode. To add a new schedule, click the **New Schedule** button.

Maximum Idle Time: After selecting **On Demand** as the **Reconnect Mode**, enter the maximum idle time value here. Entering the value 0 means infinite.

DNS Mode: Select the method that will be used to obtain DNS IP addresses here. Options to choose from are **Receive DNS from ISP** and **Enter DNS Manually**.

Primary DNS Address: After selecting the **Enter DNS Manually** option for the **DNS Mode**, enter the primary DNS IP address here.

Secondary DNS Address: After selecting the **Enter DNS Manually** option for the **DNS Mode**, enter the secondary DNS IP address here. This field is optional.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : PPPoA (Username / Password) ▼

PPPOA INTERNET CONNECTION TYPE :

Enter the information provided by your Internet Service Provider (ISP).

Username :

Password :

Verify Password :

Reconnect Mode : Always on
 On demand Manual

Maximum Idle Time : (minutes, 0=infinite)

DNS Mode : Receive DNS from ISP Enter DNS Manually

Primary DNS Server :

Secondary DNS Server : (optional)

Save Settings
Don't Save Settings

Internet Connection Type – Bridge

In this section we can configure the Internet connection type. Parameters available for configuration are the following:

My Internet Connection is: Select the Internet connection type here. Options to choose from are **Static IP**, **Dynamic IP (DHCP)**, **PPPoE (Username/Password)**, **PPPoA (Username/Password)**, and **Bridge**. This section will explain the parameters that are available after selecting the **Bridge** option.

Note: Enabling this Internet connection method will display the routing function of this device.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : Bridge

Save Settings Don't Save Settings

Wireless Settings

To access the **Wireless Settings** page, click on the **Setup** menu link, at the top, and then click on the **Wireless Settings** menu link, on the left.

On this page we can configure services related to the Wireless connectivity of this product.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET
WIRELESS SETTINGS
NETWORK SETTINGS
STORAGE
MEDIA SERVER
IPV6
MYDLINK SETTINGS

WIRELESS SETTINGS

The following Web-based wizards are designed to assist you in your wireless network setup and wireless device connection.

Before launching these wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

WIRELESS NETWORK SETUP WIZARD

This wizard is designed to assist you in your wireless network setup. It will guide you through step-by-step instructions on how to set up your wireless network and how to make it secure.

[Wireless Connection Setup Wizard](#)

Note: Some changes made using this Setup Wizard may require you to change some settings on your wireless client adapters so they can still connect to the D-Link Router.

ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP) WIZARD

This wizard is designed to assist you in connecting your wireless device to your wireless router. It will guide you through step-by-step instructions on how to get your wireless device connected. Click the button below to begin.

[Add Wireless Device with WPS](#)

MANUAL WIRELESS NETWORK SETUP

If your wireless network is already set up with Wi-Fi Protected Setup, manual configuration of the wireless network will destroy the existing wireless network. If you would like to configure the wireless settings of your new D-Link Systems Router manually, then click on the Manual Wireless Network Setup button below.

[Manual Wireless Connection Setup](#)

Helpful Hints...

- If you already have a wireless network setup with Wi-Fi Protected Setup, click on **Add Wireless Device with WPS** to add new device to your wireless network.
- If you are new to wireless networking and have never configured a wireless router before, click on **Wireless Connection Setup Wizard** and the router will guide you through a few simple steps to get your wireless network up and running.
- If you consider yourself an advanced user and have configured a wireless router before, click **Manual Wireless Connection Setup** to input all the settings manually.
- [More...](#)

Wireless Network Setup Wizard

Click the **Wireless Connection Setup Wizard** button to initiate the Wireless connection setup wizard.

Wireless Connection Setup Wizard

After clicking the **Wireless Connection Setup Wizard** button, the following page will be available.

This wizard will guide user through a step-by-step wizard, divided into 2 steps, to configure the Wireless connectivity used by this router.

WIRELESS NETWORK SETUP WIZARD

This wizard is designed to assist you in your wireless network setup. It will guide you through step-by-step instructions on how to set up your wireless network and how to make it secure.

Note: Some changes made using this Setup Wizard may require you to change some settings on your wireless client adapters so they can still connect to the D-Link Router.

D-Link®

STEP 1: WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Give your network a name, using up to 32 characters.

Network Name (SSID) 2.4GHz : D-Link DSL-2890AL

Network Name (SSID) 5GHz : D-Link DSL-2890AL_5GH

Automatically assign a network key (Recommended)

To prevent outsiders from accessing your network, the router will automatically assign a security (also called WEP or WPA key) to your network.

Manually assign a network key

Use this options if you prefer to create our own key.

Note: All D-Link wireless adapters currently support WPA.

Prev Next Cancel Save

Step 1: Welcome to the D-Link Wireless Security Setup Wizard

In this section, we can configure the following:

Network Name (SSID) 2.4GHz: Enter the wireless network name (SSID), for the 2.4GHz frequency band, here.

Network Name (SSID) 5GHz: Enter the wireless network name (SSID), for the 5GHz frequency band, here.

Automatically assign a network key: Select this option to automatically assign a wireless network key for each wireless band. The router will automatically generate a strong wireless key.

Manually assign a network key: Select this option to manually enter a custom wireless security key.

Click the **Next** button to continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main menu.

Step 2: Set Your Wireless Security Password

After selecting to manually assign a network key, the following page will be available. In this section, we can configure the following:

Use the same...: Tick this option to use the same wireless security password on both 2.4GHz and 5GHz bands.

2.4GHz Wireless Security Password: Enter the wireless security password for the 2.4GHz band here.

5GHz Wireless Security Password: Enter the wireless security password for the 5GHz band here.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

STEP 1: WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Give your network a name, using up to 32 characters.

Network Name (SSID) 2.4GHz :

Network Name (SSID) 5GHz :

Automatically assign a network key (Recommended)
To prevent outsiders from accessing your network, the router will automatically assign a security (also called WEP or WPA key) to your network.

Manually assign a network key
Use this options if you prefer to create our own key.

Note: All D-Link wireless adapters currently support WPA.

STEP 2: SET YOUR WIRELESS SECURITY PASSWORD

You have selected your security level - you will need to set a wireless security password.

The WPA (Wi-Fi Protected Access) key must meet one of following guidelines:

- Between 8 and 63 characters (A longer WPA key is more secure than a short one)
- Exactly 64 characters using 0-9 and A-F

Use the same Wireless Security Password on both 2.4GHz and 5GHz band

2.4Ghz Wireless Security Password :

5Ghz Wireless Security Password :

Note: You will need to enter the same password as keys in this step into your wireless clients in order to enable proper wireless communication.

Setup Complete

On this page we can view a summary of the Wireless settings for confirmation.

Note: Pay special attention to the **Pre-Shared Key** fields. Wireless clients will need to enter this password to connect to your wireless network.

Click the **Save** button to save the settings and complete the wizard.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SETUP COMPLETE!

Below is a detailed summary of your wireless security settings. Please print this page out, or write the information on a piece of paper, so you can configure the correct settings on your wireless client adapters.

Wireless Band	: 2.4GHz Band
Wireless Network Name (SSID)	: D-Link DSL-2890AL
Security Mode	: Auto (WPA or WPA2) - Personal
Cipher Type	: TKIP and AES
Pre-Shared Key	: 7d49df6566

Wireless Band	: 5GHz Band
Wireless Network Name (SSID)	: D-Link DSL-2890AL_5GHz
Security Mode	: Auto (WPA or WPA2) - Personal
Cipher Type	: TKIP and AES
Pre-Shared Key	: 7d49df6566


Add Wireless Device With WPS Wizard

Click the **Add Wireless Device with WPS** button to initiate the Wi-Fi Protected Setup (WPS) setup wizard.

ADD WIRELESS DEVICE WITH WPS (WI-FI PROTECTED SETUP) WIZARD

This wizard is designed to assist you in connecting your wireless device to your wireless router. It will guide you through step-by-step instructions on how to get your wireless device connected. Click the button below to begin.

After clicking the **Add Wireless Device with WPS** button, the following page will be available.

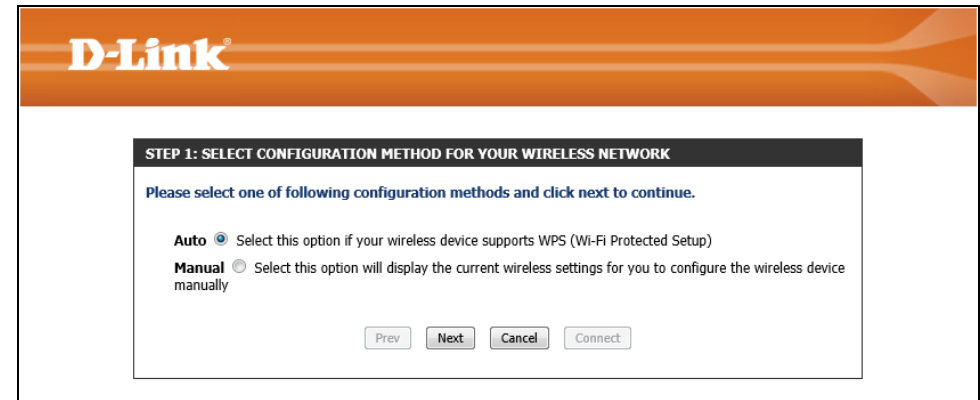

Step 1: Select Configuration Method for Your Wireless Network


In this section, we can configure the following:

Auto: Select this option to automatically allow the router and the wireless client to connect to each other by means of WPS.

Manual: Select this option to display the configured wireless settings. This information can then be configured of the wireless clients manually to initiate a wireless connection.

Click the **Next** button to continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main menu.

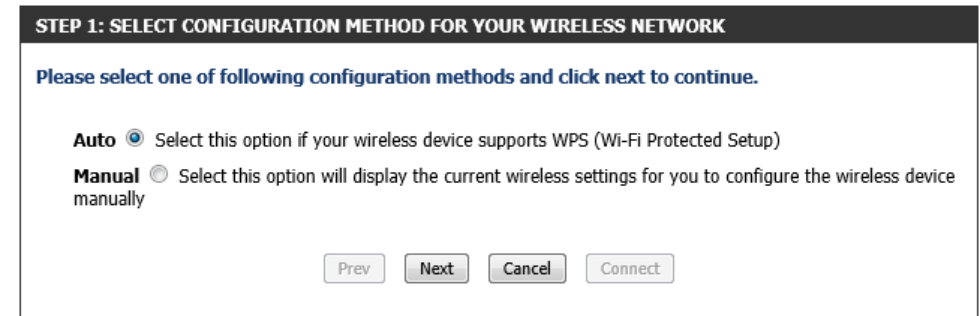

Step 2: Connect Your Wireless Device

After selecting the **Auto** option, in Step 1, the following page will be available. In this section, we can configure the following:

PIN: Select this option to use the Personal Identification Number (PIN) method to connect the two devices. Enter the PIN number here. Enter the same PIN number at the wireless client software.

PBC: Select this option to use the Push Button Configuration (PBC) method to connect the two devices.

Click the **Connect** button to initiate the WPS connection.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

After selecting the **PIN** option, in Step 2, the following page will be available.

The router will allow 120 seconds for the WPS connection to initiate.

STEP 2: CONNECT YOUR WIRELESS DEVICE

There are two ways to add wireless device to your wireless network:
 -PIN (Personal Identification Number)
 -PBC (Push Button Configuration)

PIN :

please enter the PIN from your wireless device and click the below "Connect" Button within 120 seconds

PBC

please press the push button on your wireless device and click the below "Connect" Button within 120 seconds

After selecting the **PBC** option, in Step 2, the following page will be available. Press the WPS button on the wireless client to initiate the connection.

The router will allow 120 seconds for the WPS connection to initiate.

STEP 2: CONNECT YOUR WIRELESS DEVICE

Please start WPS on the wireless device you are adding to your wireless network.
 Remain time in second: 118

Adding wireless device: Started.

STEP 2: CONNECT YOUR WIRELESS DEVICE

Please press down the Push Button (physical or virtual) on the wireless device you are adding to your wireless network.
 Remain time in second: 118

Adding wireless device: Started.

After successfully connecting the router and the wireless client, by means of WPS, the following page will be available.

Click the **Cancel** button to finish the setup and return to the main menu.

Click the **Wireless Status** button to view information about wireless clients connected to the router.

After selecting the **Manual** option, in Step 1, the following page will be available.

This information can then be configured of the wireless clients manually to initiate a wireless connection.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to finish the setup and return to the main menu.

Click the **Wireless Status** button to view information about wireless clients connected to the router.

STEP 2: CONNECT YOUR WIRELESS DEVICE

Adding wireless device: Succeeded. To add another device click on the Cancel button below or click on the Wireless Status button to check wireless status.

STEP 2: CONNECT YOUR WIRELESS DEVICE

Below is a detailed summary of your wireless security settings. Please print this page out, or write the information on a piece of paper, so you can configure the correct settings on your wireless client adapters.

2.4 Ghz Frequency

SSID: D-Link DSL-2890AL

Security Mode: Auto (WPA or WPA2) - Personal

Cipher Type: TKIP and AES

Pre-shared Key:

7d49df6566

5 Ghz Frequency

SSID: D-Link DSL-2890AL_5GHz

Security Mode: Auto (WPA or WPA2) - Personal

Cipher Type: TKIP and AES

Pre-shared Key:

7d49df6566

Manual Wireless Network Setup

Click the **Manual Wireless Network Setup** button to access the manual wireless network configuration page.

MANUAL WIRELESS NETWORK SETUP

If your wireless network is already set up with Wi-Fi Protected Setup, manual configuration of the wireless network will destroy the existing wireless network. If you would like to configure the wireless settings of your new D-Link Systems Router manually, then click on the Manual Wireless Network Setup button below.

[Manual Wireless Connection Setup](#)

After clicking the **Manual Wireless Connection Setup** button, the following page will be available.

The screenshot displays the D-Link Web User Interface for a DSL-2890AL router. The interface is divided into several sections:

- Header:** D-Link logo and navigation tabs: SETUP, ADVANCED, MAINTENANCE, STATUS, HELP.
- Left Sidebar:** A list of configuration categories: INTERNET, WIRELESS SETTINGS, NETWORK SETTINGS, STORAGE, MEDIA SERVER, IPV6, and MYDLINK SETTINGS.
- Main Content Area:**
 - WIRELESS NETWORK:** A section with an orange header. It contains instructions: "Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section may also need to be duplicated on your wireless client. To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2. When making changes to the WLAN interface, it will be restarted and the WLAN interface might temporarily disconnect." Below this are "Save Settings" and "Don't Save Settings" buttons.
 - WIRELESS NETWORK SETTINGS:** A section with a white header containing various configuration options:
 - Wireless Band : 2.4GHz Band
 - Enable Wireless : Always New Schedule
 - Wireless Network Name : D-Link DSL-2890AL (Also called the SSID)
 - 802.11 Mode : Mixed 802.11n, 802.11g and 802.11b
 - Enable Auto Channel Scan :
 - Wireless Channel : 2.412 GHz - CH 1
 - Transmission Rate : Best (automatic) (Mbit/s)
 - Channel Width : 20/40 MHz(Auto)
 - Visibility Status : Visible Invisible
 - WIRELESS SECURITY MODE:** A section with a white header containing:
 - Security Mode : WPA-Personal
- Right Sidebar:** A "Helpful Hints..." section with several bullet points:
 - Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information.
 - Enable Auto Channel Selection let the router can select the best possible channel for your wireless network to operate on.
 - Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device.
 - If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have.

In this section we can configure the following parameters.

Enable Wireless: Tick this option to enable the wireless feature for the 2.4GHz band on this router. Use the drop-down menu to apply a time schedule to this wireless network.

Wireless Network Name: Enter the wireless network name (SSID) here. This name will be available when wireless clients scan for available wireless networks. However, when the **Visibility Status** option is set to **Invisible**, this name will not be visible to wireless clients.

802.11 Mode: Here we can select which 802.11 wireless modes to use. Options to choose from are **802.11b only**, **802.11g only**, **802.11n only**, **Mixed 802.11g and 802.11b**, **Mixed 802.11n and 802.11g**, and **Mixed 802.11n, 802.11g and 802.11b**. If you are not sure, select the **Mixed 802.11n, 802.11g and 802.11b** option.

Enable Auto Channel Scan: Tick this option to allow the router to find and use the wireless channel with the least interference in your environment.

Wireless Channel: Here we can manually select a wireless channel.

Transmission Rate: Here we can select the wireless transmission rate. It is advisable to keep this option on **Best**.

Channel Width: Here we can select the wireless channel width used. Options to choose from are **20MHz** and **20/40MHz (Auto)**.

Visibility Status: Here we can choose to hide the Wireless SSID by selecting **Invisible** to hide it and **Visible** to reveal it.

Wireless Security Mode - None

This router supports four wireless security mode options available in the **Security Mode** drop-down menu for the 2.4GHz band.

The first security mode is called **None**. By selecting this mode, there will be no wireless security applied to your wireless network. This means that anyone with a wireless adapter can connect to your network.

WIRELESS NETWORK SETTINGS
Wireless Band : 2.4GHz Band
Enable Wireless : Always New Schedule
Wireless Network Name : D-Link DSL-2890AL (Also called the SSID)
802.11 Mode : Mixed 802.11n, 802.11g and 802.11b
Enable Auto Channel Scan :
Wireless Channel : 2.412 GHz - CH 1
Transmission Rate : Best (automatic) (Mbit/s)
Channel Width : 20/40 MHz(Auto)
Visibility Status : Visible Invisible

WIRELESS SECURITY MODE
Security Mode : None

Wireless Security Mode - WEP

Wired Equivalent Privacy (WEP) is any entry level wireless security method that we can use to prevent unauthorized wireless access to this router. WEP is not a very secure option, but it is better than no wireless security.

After selecting to use **WEP** as your wireless security mode, the following parameters will be available to configure:

WEP Key Length: Select the WEP Key Length value used here. Options to choose from are **128 bit (26 hex digits)** and **64 bit (10 hex digits)**.

Authentication: Select the WEP authentication option here. Options to choose from are **Both** and **Shared Key**.

WEP Key 1: Enter a wireless security key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

WIRELESS SECURITY MODE	
Security Mode :	<input type="text" value="WEP"/>
WEP	
WEP is the wireless encryption standard. To use it you must enter the same key(s) into the router and the wireless stations. For 64-bit keys you must enter 10 hex digits into each key box. For 128-bit keys you must enter 26 hex digits into each key box. A hex digit is either a number from 0 to 9 or a letter from A to F. For the most secure use of WEP set the authentication type to "Shared Key" when WEP is enabled.	
You may also enter any text string into a WEP key box, in which case it will be converted into a hexadecimal key using the ASCII values of the characters. A maximum of 5 text characters can be entered for 64-bit keys, and a maximum of 13 characters for 128-bit keys.	
If you choose the WEP security option this device will ONLY operate in Legacy Wireless mode (802.11B/G) . This means you will NOT get 11N performance due to the fact that WEP is not supported by the Draft 11N specification.	
WEP Key Length :	<input type="text" value="64 bit (10 hex digits)"/> (length applies to all keys)
Authentication :	<input type="text" value="Both"/>
WEP Key 1 :	<input type="text"/>

Wireless Security Mode – WPA-Personal

Wi-Fi Protected Access (WPA) is a more advanced wireless security method that we can use to prevent unauthorized wireless access to this router. **Wi-Fi Protected Access (WPA2)** is the most advanced wireless security method that we can use to prevent unauthorized wireless access to this router.

WPA Personal does not require an authentication server.

After selecting to use **WPA-Personal** as your wireless security mode, the following parameters will be available to configure:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. Options to choose from are **TKIP and AES**, **TKIP**, and **AES**.

Group Key Update Interval: Enter the group key update interval value here.

Pre-Shared Key: Enter the WPA-Personal wireless Pre-Shared Key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

WIRELESS SECURITY MODE	
Security Mode :	<input type="text" value="WPA-Personal"/>
WPA	
<p>Use WPA or WPA2 mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use WPA2 Only mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use WPA Only. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.</p> <p>To achieve better wireless performance use WPA2 Only security mode (or in other words AES cipher).</p>	
WPA Mode :	<input type="text" value="Auto(WPA or WPA2)"/>
Cipher Type :	<input type="text" value="TKIP and AES"/>
Group Key Update Interval :	<input type="text" value="3600"/> (seconds)
PRE-SHARED KEY	
<p>Enter an 8- to 63-character alphanumeric pass-phrase. For good security it should be of ample length and should not be a commonly known phrase.</p>	
Pre-Shared Key :	<input type="text" value="7d49df6566"/>

Wireless Security Mode – WPA-Enterprise

Wi-Fi Protected Access (WPA) is a more advanced wireless security method that we can use to prevent unauthorized wireless access to this router. **Wi-Fi Protected Access (WPA2)** is the most advanced wireless security method that we can use to prevent unauthorized wireless access to this router.

WPA-Enterprise requires the use of an external RADIUS server.

After selecting to use **WPA-Enterprise** as your wireless security mode, the following parameters will be available to configure:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. Options to choose from are **TKIP and AES**, **TKIP**, and **AES**.

Group Key Update Interval: Enter the group key update interval value here.

RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

RADIUS server Port: Enter the external RADIUS server port number used here.

RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here.
This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Click the **Advanced** button to configure settings for an optional secondary RADIUS server.

WIRELESS SECURITY MODE

Security Mode :

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode :

Cipher Type :

Group Key Update Interval : (seconds)

EAP (802.1X)

When WPA enterprise is enabled, the router uses EAP (802.1x) to authenticate clients via a remote RADIUS server.

RADIUS server IP Address :

RADIUS server Port :

RADIUS server Shared Secret :

After clicking the **Advanced** button, the following parameters are available for configuration:

Second RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

Second RADIUS server Port: Enter the external RADIUS server port number used here.

Second RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Optional backup RADIUS server

Second RADIUS server IP Address :

Second RADIUS server Port :

Second RADIUS server Shared Secret :

In this section we can configure the following parameters.

Enable Wireless: Tick this option to enable the wireless feature for the 5GHz band on this router. Use the drop-down menu to apply a time schedule to this wireless network.

Wireless Network Name: Enter the wireless network name (SSID) here. This name will be available when wireless clients scan for available wireless networks. However, when the **Visibility Status** option is set to **Invisible**, this name will not be visible to wireless clients.

802.11 Mode: Here we can select which 802.11 wireless modes to use. Options to choose from are **802.11a only**, **802.11n only**, **Mixed 802.11a and 802.11n**, and **Mixed 802.11ac**. If you are not sure, select the **Mixed 802.11ac** option.

Enable Auto Channel Scan: Tick this option to allow the router to find and use the wireless channel with the least interference in your environment.

Wireless Channel: Here we can manually select a wireless channel.

Transmission Rate: Here we can select the wireless transmission rate. It is advisable to keep this option on **Best**.

Channel Width: Here we can select the wireless channel width used. Options to choose from are **20MHz**, **20/40MHz (Auto)**, and **20/40/80MHz (Auto)**.

Visibility Status: Here we can choose to hide the Wireless SSID by selecting **Invisible** to hide it and **Visible** to reveal it.

WIRELESS NETWORK SETTINGS

Wireless Band : 5GHz Band

Enable Wireless :

Wireless Network Name : (Also called the SSID)

802.11 Mode :

Enable Auto Channel Scan :

Wireless Channel :

Transmission Rate : (Mbit/s)

Channel Width :

Visibility Status : Visible Invisible

Wireless Security Mode - None

This router supports three wireless security mode options available in the **Security Mode** drop-down menu for the 5GHz band.

The first security mode is called **None**. By selecting this mode, there will be no wireless security applied to your wireless network. This means that anyone with a wireless adapter can connect to your network.

WIRELESS SECURITY MODE

Security Mode :

Wireless Security Mode – WPA-Personal

Wi-Fi Protected Access (WPA) is a more advanced wireless security method that we can use to prevent unauthorized wireless access to this router. **Wi-Fi Protected Access (WPA2)** is the most advanced wireless security method that we can use to prevent unauthorized wireless access to this router.

WPA Personal does not require an authentication server.

After selecting to use **WPA-Personal** as your wireless security mode, the following parameters will be available to configure:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. The only option available is **AES**.

Group Key Update Interval: Enter the group key update interval value here.

Pre-Shared Key: Enter the WPA-Personal wireless Pre-Shared Key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

WIRELESS SECURITY MODE

Security Mode :

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode :

Cipher Type :

Group Key Update Interval : (seconds)

PRE-SHARED KEY

Enter an 8- to 63-character alphanumeric pass-phrase. For good security it should be of ample length and should not be a commonly known phrase.

Pre-Shared Key :

Wireless Security Mode – WPA-Enterprise

Wi-Fi Protected Access (WPA) is a more advanced wireless security method that we can use to prevent unauthorized wireless access to this router. **Wi-Fi Protected Access (WPA2)** is the most advanced wireless security method that we can use to prevent unauthorized wireless access to this router.

WPA-Enterprise requires the use of an external RADIUS server.

After selecting to use **WPA-Enterprise** as your wireless security mode, the following parameters will be available to configure:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. The only option available is **AES**.

Group Key Update Interval: Enter the group key update interval value here.

RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

RADIUS server Port: Enter the external RADIUS server port number used here.

RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Click the **Advanced** button to configure settings for an optional secondary RADIUS server.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

WIRELESS SECURITY MODE

Security Mode :

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode :

Cipher Type :

Group Key Update Interval : (seconds)

EAP (802.1X)

When WPA enterprise is enabled, the router uses EAP (802.1x) to authenticate clients via a remote RADIUS server.

RADIUS server IP Address :

RADIUS server Port :

RADIUS server Shared Secret :

After clicking the **Advanced** button, the following parameters are available for configuration:

Second RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

Second RADIUS server Port: Enter the external RADIUS server port number used here.

Second RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

<< Advanced

Optional backup RADIUS server

Second RADIUS server IP :
Address

Second RADIUS server Port :

Second RADIUS server Shared :
Secret

Network Settings

To access the **Network Settings** page, click on the **Setup** menu link, at the top, and then click on the **Network Settings** menu link, on the left.

On this page we can configure services related to the Local Area Network connectivity of this product.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET
WIRELESS SETTINGS
NETWORK SETTINGS
STORAGE
MEDIA SERVER
IPV6
MYDLINK SETTINGS

NETWORK SETTINGS

Use this section to configure the internal network settings of your router and also to configure the built-in DHCP server to assign IP addresses to computers on your network. The IP address that is configured here is the IP address that you use to access the Web-based management interface. If you change the IP address in this section, you may need to adjust your PC's network settings to access the network again.

Please note that this section is optional and you do not need to change any of the settings here to get your network up and running.

Save Settings Don't Save Settings

ROUTER SETTINGS

Use this section to configure the internal network settings of your router. The IP address that is configured here is the IP address that you use to access the Web-based management interface. If you change the IP address here, you may need to adjust your PC's network settings to access the network again.

Router IP Address : 192.168.1.1
Default Subnet Mask : 255.255.255.0
Host Name : dlinkrouter
Local Domain Name : (optional)
Enable DNS Relay :

DHCP SERVER SETTINGS

Use this section to configure the built-in DHCP server to assign IP address to the computers on your network.

Enable DHCP Server :

Helpful Hints...

- If you already have a DHCP server on your network or are using static IP addresses on all the devices on your network, uncheck **Enable DHCP Server** to disable this feature.
- If you have devices on your network that should always have fixed IP addresses, add a **DHCP Reservation** for each such device.
- [More...](#)

In this section, the following parameters are available to configure:

Router IP Address: Enter the local IP address for this router here. This IP address is also used to connect to this device's Web User Interface. Please note that after changing this IP address you'll be forced to log into the Web User Interface again, using the new IP address.

Default Subnet Mask: Enter the subnet mask used here.

Host Name: Enter the host name here.

Local Domain Name: Enter the local domain name here. This field is optional.

Enable DNS Relay: Tick this option to enable the DNS relay option.

In this section, the following parameters can be configured:

Enable DHCP Server: Select this option to enable the DHCP Server option.

DHCP IP Address Range: Enter the starting and ending IP address host number value for the DHCP Server pool here.

DHCP Lease Time: Enter the DHCP lease time value used here.

Always broadcast: Tick this option to enable the always broadcast feature.

ROUTER SETTINGS

Use this section to configure the internal network settings of your router. The IP address that is configured here is the IP address that you use to access the Web-based management interface. If you change the IP address here, you may need to adjust your PC's network settings to access the network again.

Router IP Address :

Default Subnet Mask :

Host Name :

Local Domain Name : (optional)

Enable DNS Relay :

DHCP SERVER SETTINGS

Use this section to configure the built-in DHCP server to assign IP address to the computers on your network.

Enable DHCP Server :

DHCP IP Address Range : to (addresses within the LAN subnet)

DHCP Lease Time : (minutes)

Always broadcast : (compatibility for some DHCP Clients)

In this section, the following parameters can be configured:

Enable: Tick this option to enable the DHCP IP address reservation feature.

Computer Name: Enter the computer's name here. Alternatively select the computer name from the **Computer Name** drop-down menu and click the << button to place it into the textbox.

IP Address: Enter the IP address that will be reserved for the node here.

MAC Address: Enter the MAC address of the node being reserved here. Click the **Clone Your PC's MAC Address** button to copy and paste your PC's MAC address in the textbox.

ADD DHCP RESERVATION

Enable :

Computer Name : << Computer Name ▼

IP Address :

MAC Address :


Clone Your PC's MAC Address


Add / Update Clear

Click the **Add/Update** button to add or update a DHCP reservation entry, based on the information entered.


Click the **Clear** button to clear out the information entered in the fields mentioned above.

In this section, a list of DHCP reservations will be display.

Click the  icon to modify a specific entry.

Click the  icon to delete a specific entry.

DHCP RESERVATIONS LIST

Enable	Host Name	IP Address	MAC Address		
<input checked="" type="checkbox"/>	Computer	192.168.1.2	10:bf:48:d6:e2:e2		

In this section, a list of dynamic DHCP clients will be displayed.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

NUMBER OF DYNAMIC DHCP CLIENTS

Host Name	IP Address	MAC Address	Expired Time
Nick-PC2	192.168.1.2	10:bf:48:d6:e2:e2	23 Hours 59 Minutes

Save Settings Don't Save Settings

Storage

To access the **Storage** page, click on the **Setup** menu link, at the top, and then click on the **Storage** menu link, on the left.

On this page we can configure services related to the storage media and services used by this product.

The screenshot displays the D-Link web user interface for the DSL-2890AL modem router. The top navigation bar includes the D-Link logo and tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. A left-hand menu lists various configuration categories, with STORAGE highlighted. The main content area is divided into three sections: STORAGE, SHAREPORT WEB ACCESS, and FTP SERVER ACCESS. Each section provides instructions and a 'Service Setup' button. A 'Helpful Hints...' sidebar on the right offers additional information and a 'More...' link. At the bottom, a table header is visible with columns for Device, Total Space, Free Space, and Action.

DSL-2890AL //	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
INTERNET	STORAGE				Helpful Hints... <ul style="list-style-type: none"> The Storage page contains information about the USB storage drives or SD cards currently plugged into the device. More...
WIRELESS SETTINGS	Storage File Access allows you to use a web browser or ftp client to remotely access files stored on an SD card or USB storage drive plugged into the router. After plugging in an SD card or USB storage drive, the new device will appear in the list with a link to it. You can then use this link to connect to the drive and log in with a user account.				
NETWORK SETTINGS	SHAREPORT WEB ACCESS				
STORAGE	If you would like to configure the Web Access Service settings or create user accounts, then click on the button below.				
MEDIA SERVER	Web Access Service Setup				
IPV6	You can then use this link to connect to the drive and log in with a user account.				
MYDLINK SETTINGS	FTP SERVER ACCESS				
LOGOUT	If you would like to configure the FTP Access Service settings or create user accounts, then click on the button below.				
	FTP Access Service Setup				
	You can then use this link to connect to the drive and log in with a user account.				
	Device	Total Space	Free Space	Action	

In the **SharePort Web Access** section, we can configure the SharePort web access settings. Click the **Web Access Service Setup** button to access the SharePort Web Access Configuration page.

Also in this section, users can click on the hyperlinks to access the SharePort Utility to access music, photos, movies and documents found on the storage medium attached. HTTP and HTTPS access is provided.

After clicking the **Web Access Service Setup** button, the following page will be displayed.

SHAREPORT WEB ACCESS

If you would like to configure the Web Access Service settings or create user accounts, then click on the button below.

[Web Access Service Setup](#)

You can then use this link to connect to the drive and log in with a user account.

<http://192.168.1.1:8181>

<https://192.168.1.1:4433>

D-Link

DSL-2890AL	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
-------------------	-------	----------	-------------	--------	------

INTERNET

WIRELESS SETTINGS

NETWORK SETTINGS

STORAGE

MEDIA SERVER

IPV6

MYDLINK SETTINGS

LOGOUT

STORAGE

Web File Access allows you to use a web browser to remotely access files stored on an SD card or USB storage drive plugged into the router. To use this feature, check the Enable Web File Access checkbox, then use the Admin account or create user accounts to manage access to your storage devices.

SHAREPORT WEB ACCESS

Enable SharePort Web Access :

HTTP Access Port :

HTTPS Access Port :

Allow Remote Access :

WEB ACCESS: 10 -- USER CREATION

User Name : << User Name ▾

Password :

Verify Password :

WEB ACCESS: USER LIST

No.	User Name	Access Path	Permission	Edit	Delete
1	admin	/	Read/Write	<input type="button" value=""/>	<input type="button" value=""/>

Helpful Hints...

- The Storage page contains information about the USB storage drivers or SD cards currently plugged into the device.
- [More...](#)

In this section, the following parameters can be configured:

Enable SharePort Web Access: Tick this option to enable the SharePort feature.

HTTP Access Port: Enter the HTTP access port number here.

HTTPS Access Port: Enter the HTTPS access port number here.

Allow Remote Access: Tick this option to allow remote access to the SharePort feature.

SHAREPORT WEB ACCESS

Enable SharePort Web Access :

HTTP Access Port :

HTTPS Access Port :

Allow Remote Access :

In this section, the following parameters can be configured:

User Name: Enter the username for the SharePort client account here.

Alternatively, select a user from the **User Name** drop-down menu to automatically add a username into the textbox.

Password: Enter the password for the SharePort client account here.

Verify Password: Re-enter the password for the SharePort client account here.

WEB ACCESS: 10 -- USER CREATION

User Name : <<

Password :

Verify Password :

Click the **Add/Edit** button to add or modify the SharePort client account.

In this section, a list of preconfigured SharePort user accounts will be displayed.



Click the  icon to modify the specific account.

Click the  icon to delete the specific account.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

WEB ACCESS: USER LIST

No.	User Name	Access Path	Permission	Edit	Delete
1	admin	/	Read/Write		
2	guest	None	Read Only		

After clicking the  icon, the following parameters can be configured:

Folder: Click the **Browse** button to navigate to a folder on the storage medium that will be allowed access to for this user account. Select the **root** option allow this user account to access the root folder on the storage medium.

Permission: Select the access permission for this account here. Options to choose from are **Read Only** and **Read/Write**.


Click the **Append** button to append these settings to a new account.

Click the **OK** button to modify this account.

Click the **Cancel** button to discard the changes made.

After click either the HTTP or HTTPS hyperlink, users will be required to enter the SharePort user account details in the spaces provided.

After successful authentication, access to the SharePort utility will be given. Here users can access music, photos, movies, and document from the storage medium attached the USB port of this router.

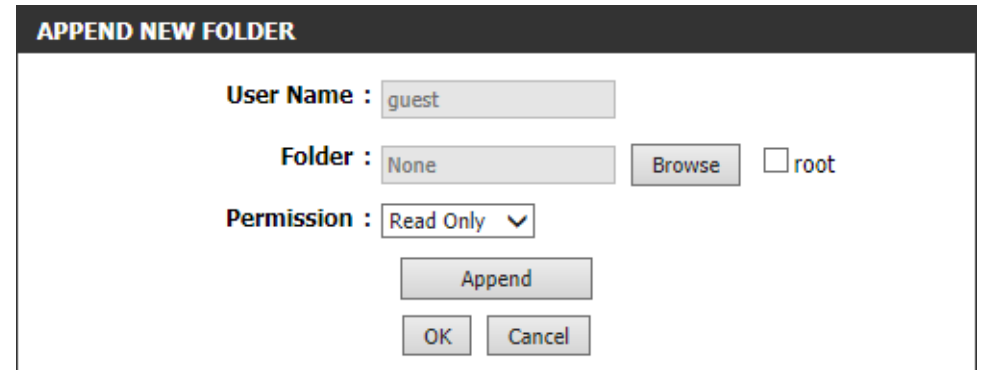


APPEND NEW FOLDER

User Name :

Folder : root

Permission : ▾

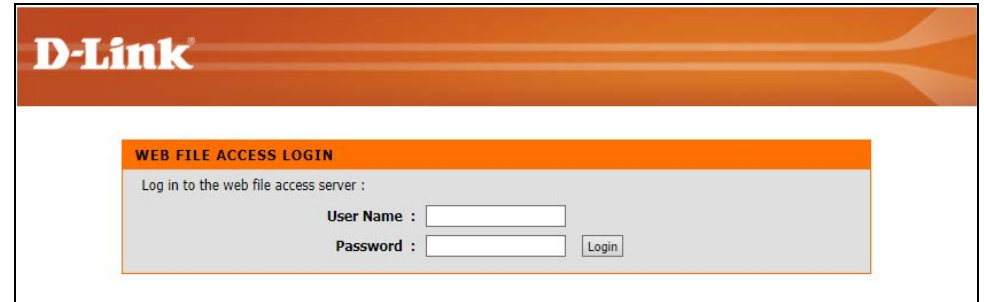

D-Link

WEB FILE ACCESS LOGIN

Log in to the web file access server :

User Name :

Password :



On the main **Storage** page, in the **FTP Server Access** section, we can configure FTP access to the storage medium attached. Click the **FTP Access Service Setup** button to access the FTP Server Access Configuration page.

Also in this section, users can click on the hyperlinks to access the FTP server, hosted by this router, to provide FTP access to the files on the storage medium attached.

After clicking the **FTP Access Service Setup** button, the following page will be displayed.

FTP SERVER ACCESS

If you would like to configure the FTP Access Service settings or create user accounts, then click on the button below.

You can then use this link to connect to the drive and log in with a user account.

<ftp://192.168.1.1>

D-Link®

DSL-2890AL //	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP												
INTERNET WIRELESS SETTINGS NETWORK SETTINGS STORAGE MEDIA SERVER IPV6 MYDLINK SETTINGS LOGOUT	<div style="background-color: #f4a460; padding: 5px; font-weight: bold;">STORAGE</div> <p>FTP Access allows you to use a ftp client to remotely access files stored on an SD card or USB storage drive plugged into the router. To use this feature, check the Allow Access checkbox, then use the Admin account or create user accounts to manage access to your storage devices.</p> <div style="text-align: center;"> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> </div>				Helpful Hints... <ul style="list-style-type: none"> The Storage page contains information about the USB storage drivers or SD cards currently plugged into the device. More... 												
	<div style="background-color: #333; color: white; padding: 5px; font-weight: bold;">FTP SERVER ACCESS</div> <p> Allow Local Access : <input type="checkbox"/> Allow Remote Access : <input type="checkbox"/> Remote Access Port : <input type="text" value="2121"/> Max Users Allowed to Log In : <input type="text" value="32"/> User Idle time : <input type="text" value="300"/> second </p>																
	<div style="background-color: #333; color: white; padding: 5px; font-weight: bold;">FTP ACCESS: 32 -- USER CREATION</div> <p> User Name : <input type="text"/> << User Name ▾ Password : <input type="password"/> Verify Password : <input type="password"/> <input type="button" value="Add/Edit"/> </p>																
	<div style="background-color: #333; color: white; padding: 5px; font-weight: bold;">FTP ACCESS: USER LIST</div> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>No.</th> <th>User Name</th> <th>Access Path</th> <th>Permission</th> <th>Edit</th> <th>Delete</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>admin</td> <td>/</td> <td>A</td> <td></td> <td></td> </tr> </tbody> </table> <div style="text-align: center; margin-top: 5px;"> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> </div>				No.	User Name	Access Path	Permission	Edit	Delete	1	admin	/	A			
No.	User Name	Access Path	Permission	Edit	Delete												
1	admin	/	A														

In this section, the following parameters can be configured:

Allow Local Access: Select this option to allow the LAN to access to the FTP server.

Allow Remote Access: Select this option to allow WAN access to the FTP server.

Remote Access Port: After select the Allow Remote Access option, enter the remote access port number here.

Max Users Allowed to Log In: Enter the number of concurrent users that will be allowed to connect to this FTP server here.

User Idle Time: Enter the user account connection idle time value, in seconds here. After this time has expired, the user will be disconnected from the FTP server.

FTP SERVER ACCESS	
Allow Local Access :	<input type="checkbox"/>
Allow Remote Access :	<input type="checkbox"/>
Remote Access Port :	<input type="text" value="2121"/>
Max Users Allowed to Log In :	<input type="text" value="32"/>
User Idle time :	<input type="text" value="300"/> second

In this section, the following parameters can be configured:

User Name: Enter the username for the FTP user account here. Alternatively, select a user from the **User Name** drop-down menu to automatically add a username into the textbox.

Password: Enter the password for the FTP user account here.

Verify Password: Re-enter the password for the FTP user account here.

FTP ACCESS: 32 -- USER CREATION	
User Name :	<input type="text"/> << User Name ▼
Password :	<input type="password"/>
Verify Password :	<input type="password"/> Add/Edit

Click the **Add/Edit** button to add or modify the SharePort client account.



In this section, a list of preconfigured FTP access user accounts will be displayed.

Click the  icon to modify the specific account.

Click the  icon to delete the specific account.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

FTP ACCESS: USER LIST					
No.	User Name	Access Path	Permission	Edit	Delete
1	admin	/	A		
2	guest	None	None		

Save Settings Don't Save Settings

After clicking the  icon, the following parameters can be configured:

Folder: Click the **Browse** button to navigate to a folder on the storage medium that will be allowed access to for this FTP user account. Select the **root** option allow this FTP user account to access the root folder on the storage medium.

Permission: Select the access permission for this FTP user account here. Options to choose from are **A (Allow Everything)**, **D (Download)**, **U (Upload + Making Directories)**, **O (Overwrite Existing Files)**, **M (Allow Multiple Logins)**, and **E (Allow Erase Operations)**.

Click the **OK** button to modify this account.

Click the **Cancel** button to discard the changes made.

USER PERMISSION

User Name :

Folder : root

Permission : A (allows EVERYTHING)
 D (download)
 U (upload + making directories)
 O (overwrite existing files)
 M (allows multiple logins)
 E (allows erase operations)

Lastly, in the main **Storage** page, a list of connected storage devices will be displayed.

Click the **Unmount** button to safely unmount the storage medium before removing it from the router's USB port.

NUMBER DEVICES:1			
Device	Total Space	Free Space	Action
JetFlash_Transcend_09851	30.8 GB	7.6 GB	<input type="button" value="unmount"/>

Media Server

To access the **Media Server** page, click on the **Setup** menu link, at the top, and then click on the **Media Server** menu link, on the left.

On this page we can configure the DLNA media server and iTunes server used by this product.

The screenshot shows the D-Link WUI for a DSL-2890AL modem router. The page is titled "Media Server" and is part of the "SETUP" menu. The left sidebar contains a navigation menu with the following items: INTERNET, WIRELESS SETTINGS, NETWORK SETTINGS, STORAGE, MEDIA SERVER (highlighted), IPV6, and MYLINK SETTINGS. The main content area is divided into three sections:

- MEDIA SERVER**: Contains a description of DLNA (Digital Living Network Alliance) and a note: "NOTE: The shared media may not be secure. Allowing any devices to stream is recommended only on secure networks." Below this are three buttons: "Save Settings", "Don't Save Settings", and "Refresh".
- DLNA SERVER**: Contains the following settings:
 - DLNA Server : Enable Disable
 - DLNA Server Name :
 - Folder : root
- ITUNES SERVER**: Contains the following settings:
 - iTunes Server : Enable Disable
 - Folder : root

At the bottom of the DLNA and iTunes sections are buttons for "Save Settings" and "Don't Save Settings". On the right side of the page, there is a "Helpful Hints..." section with a list of tips, including: "After adding new media content to the router, click the Enable or Disable button and then save settings." and a "More..." link.

In this section, the following parameters can be configured:

DLNA Server: Select to enable or disable the DLNA server option here.

DLNA Server Name: Enter the DLNA media server name here. This name will be used by DLNA clients to identify and connect to the DLNA server.

Folder: This parameter specifies the DLNA shared media folder path. Tick the **root** option to allow access to all files and folders on the storage device. Alternatively, click the **Browse** button to navigate to a specific folder that can be shared.

In this section, the following parameters can be configured:

iTunes Server: Select to enable or disable the iTunes server option here.

Folder: This parameter specifies the iTunes server shared media folder path. Tick the **root** option to allow access to all files and folders on the storage device. Alternatively, click the **Browse** button to navigate to a specific folder that can be shared.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

DLNA SERVER
DLNA Server : Enable Disable
DLNA Server Name :
Folder : root

ITUNES SERVER
iTunes Server : Enable Disable
Folder : root

IPv6

To access the **IPv6** page, click on the **Setup** menu link, at the top, and then click on the **IPv6** menu link, on the left.

On this page we can configure services related to the IPv6 connectivity of this product.

The screenshot shows the D-Link web interface for the DSL-2890AL. The top navigation bar includes 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various settings categories, with 'IPv6' selected. The main content area is titled 'IPv6 INTERNET CONNECTION' and contains the following sections:

- IPv6 INTERNET CONNECTION**: A text box explaining that there are two ways to set up an IPv6 Internet connection: using the Web-based IPv6 Internet Connection Setup Wizard or manually configuring the connection.
- IPv6 INTERNET CONNECTION SETUP WIZARD**: A section with a text box explaining that the Web-based Wizard can assist in connecting a new D-Link Systems Router to the IPv6 Internet. Below the text is a button labeled 'IPv6 Internet Connection Setup Wizard'. A note below the button states: 'Note: Before launching the wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.'
- MANUAL IPV6 LOCAL CONNECTIVITY SETUP**: A section with a text box explaining that this option is for configuring IPv6 local connectivity settings. Below the text is a button labeled 'IPv6 Local Connectivity Settings'.
- MANUAL IPV6 INTERNET CONNECTION SETUP**: A section with a text box explaining that this option is for manually configuring IPv6 Internet settings. Below the text is a button labeled 'Manual IPv6 Internet Connection Setup'.

On the right side, there is a 'Helpful Hints...' sidebar with the following text:

- If you are new to networking and have never configured a router before, click on **IPv6 Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual IPv6 Internet Connection Setup** to input all the settings manually.
- [More...](#)

Click the **IPv6 Internet Connection Setup Wizard** button to initiate the IPv6 Internet connection setup wizard.


This is a close-up of the 'IPv6 INTERNET CONNECTION SETUP WIZARD' section. It contains the following text:

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the IPv6 Internet, click on the button below.

[IPv6 Internet Connection Setup Wizard](#)

Note: Before launching the wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

After clicking the **IPv6 Internet Connection Setup Wizard** button, the following page will be available.

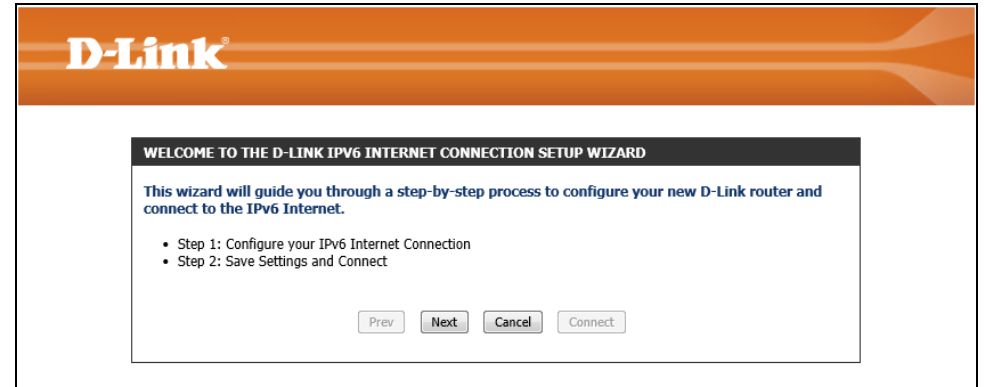

Welcome to the D-Link IPv6 Internet Connection Setup Wizard

This wizard will guide user through a step-by-step wizard, divided into 2 steps, to configure the IPv6 Internet connectivity used by this router.

Click the **Next** button to continue to the next page.

Click the **Cancel** button to discard the changes made and return to the main page.



Step 1: Configure Your IPv6 Internet Connection

In this step, we can select an IPv6 Internet connection type from the list provided. In this section, we can configure the following:

IPv6 over PPPoE: Select this option to configure an IPv6 Internet connection that requires a PPPoE username and password.

Static IPv6 address and Route: Select this option to configure an IPv6 Internet connection that requires manually configuring the IPv6 address information.

Tunneling Connection (6rd): Select this option to configure an IPv6 Internet connection that requires manually configuring the 6rd automatic tunneling mechanism.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

After selecting the **IPv6 over PPPoE** option, we can configure the following parameters:

PPPoE Session: Select the PPPoE session used here. To share this connection with IPv4, select the **Share with IPv4** option. To create a new connection, select the **Create a new session** option.

User Name: Enter the IPv6 PPPoE username here.

Password: Enter the IPv6 PPPoE password here.

Verify Password: Enter the IPv6 PPPoE password here again to verify.

Service Name: Enter the service name here. This field is optional.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

STEP 1: CONFIGURE YOUR IPV6 INTERNET CONNECTION

Please select your IPv6 Internet Connection type:

IPv6 over PPPoE
Choose this option if your IPv6 Internet connection requires a username and password to get online. Most DSL modems use this type of connection.

Static IPv6 address and Route
Choose this option if your Internet Setup Provider (ISP) provided you with IPv6 Address information that has to be manually configured.

Tunneling Connection (6rd)
Choose this option if your Internet Setup Provider (ISP) provided you a IPv6 Internet Connection by using 6rd automatic tunneling mechanism.

SET USERNAME AND PASSWORD CONNECTION (PPPOE)

To set up this connection you will need to have a Username and Password from your IPv6 Internet Service Provider. If you do not have this information, please contact your ISP.

PPPoE Session : Share with IPv4 Create a new session

User Name :

Password :

Verify Password :

Service Name : (optional)

Note: You may also need to provide a Service Name. If you do not have or know this information, please contact your ISP.

After selecting the **Static IPv6 address and Route** option, we can configure the following parameters:

Use Link-Local Address: Tick this option to use the link-local address.

IPv6 Address: Enter the static IPv6 address here.

Subnet Prefix Length: Enter the IPv6 address prefix length here.

Default Gateway: Enter the default IPv6 gateway address here.

Primary IPv6 DNS Address: Enter the primary IPv6 DNS address here.

Secondary IPv6 DNS Address: Enter the secondary IPv6 DNS address here.

LAN IPv6 Address: Enter the LAN IPv6 address here.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET STATIC IPV6 ADDRESS CONNECTION

To set up this connection you will need to have a complete list of IPv6 information provided by your IPv6 Internet Service Provider. If you have a Static IPv6 connection and do not have this information, please contact your ISP.

Use Link-Local Address :

IPv6 Address :

Subnet Prefix Length :

Default Gateway :

Primary IPv6 DNS Address :

Secondary IPv6 DNS Address :

LAN IPv6 Address : /64

After selecting the **Tunneling Connection (6rd)** option, we can configure the following parameters:

6rd IPv6 Prefix: Enter the 6rd IPv6 prefix value here:

IPv4 Address: Enter the IPv4 address here.

Mask Length: Enter the IPv4 mask length here.

Assigned IPv6 Prefix: Enter the assigned IPv6 prefix value here.

6rd Border Relay IPv4 Address: Enter the 6rd border relay IPv4 address here.

IPv6 DNS Server: Enter the IPv6 DNS server address here.

Click the **Next** button to continue to the next step.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

SET UP 6RD TUNNELING CONNECTION

To set up this 6rd tunneling connection you will need to have the following information from your IPv6 Internet Service Provider. If you do not have this information, please contact your ISP.

6rd IPv6 Prefix : /

IPv4 Address : Mask Length :

Assigned IPv6 Prefix :

6rd Border Relay IPv4 Address :


IPv6 DNS Server :

After successfully configuring the IPv6 Internet connection, the following page will be available.

Click the **Connect** button to save the settings and reboot the router.


Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

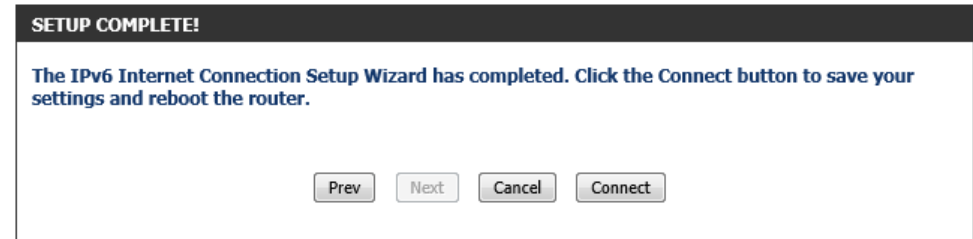


Manual IPv6 Local Connectivity Setup

Click the **IPv6 Local Connectivity Settings** button to manually configure the IPv6 local connection.

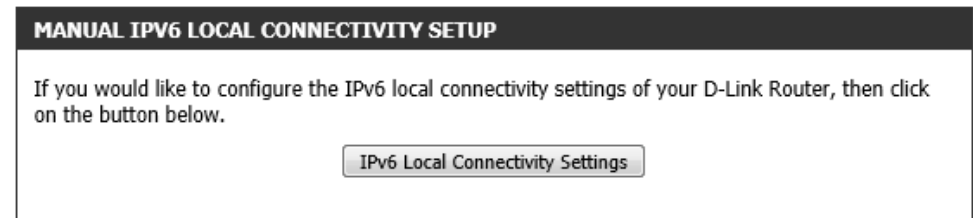

After clicking the **IPv6 Local Connectivity Settings** button, the following page will be available.

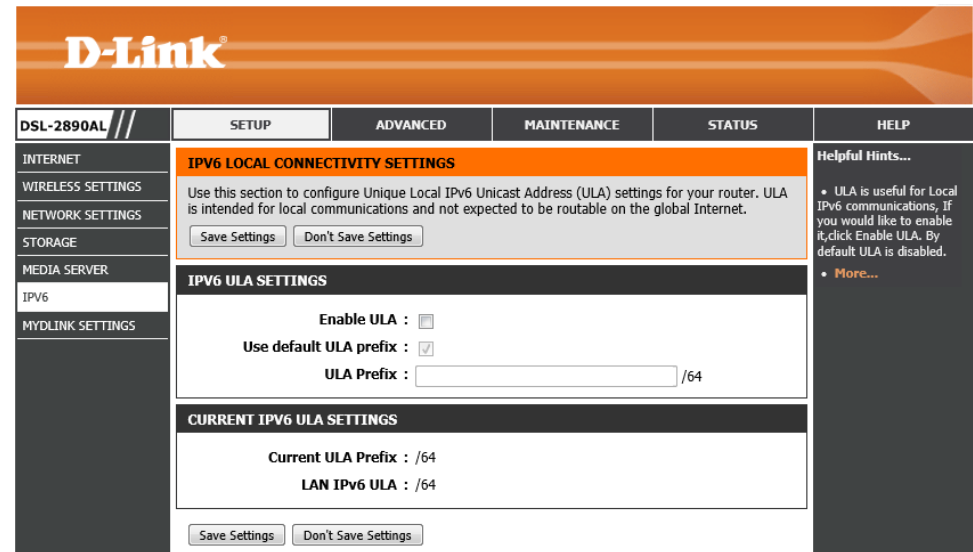

In this section, the following parameters can be configured:

Enable ULA: Tick this option to enable the Unique Local Address (ULA) feature.

Use default ULA prefix: Tick this option to use the default ULA prefix value.

ULA Prefix: Enter the ULA prefix value manually here.

IPv6 ULA SETTINGS
Enable ULA :
Use default ULA prefix :
ULA Prefix : /64

In this section, the following parameters can be viewed:

Current ULA Prefix: Displays the current ULA prefix value used.

LAN IPv6 ULA: Displays the LAN IPv6 ULA.

CURRENT IPV6 ULA SETTINGS
Current ULA Prefix : /64
LAN IPv6 ULA : /64

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

Click the **Manual IPv6 Internet Connection Setup** button to access the manual IPv6 Internet connection setup page.

MANUAL IPV6 INTERNET CONNECTION SETUP
If you would like to configure the IPv6 Internet settings of your new D-Link Router manually, then click on the button below.

After clicking the **Manual IPv6 Internet Connection Setup** button, the following page will be available.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

IPv6

Use this section to configure your IPv6 Connection Type. If you are unsure of your connection method, please contact your Internet Service Provider.

Save Settings Don't Save Settings

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is : Local Connectivity Only

LAN IPv6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router.

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

Save Settings Don't Save Settings

Helpful Hints...

- When configuring the router to access the IPv6 internet, be sure to choose the correct IPv6 Connection Type from the drop down menu. If you are unsure of which option to choose, contact your internet Service Provider(ISP).
- If you are having trouble accessing the IPv6 internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.
- [More...](#)

IPv6 Connection Type – Auto Detection

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **Auto Detection** option.

In this section, the following parameters can be configured:

Obtain IPv6 DNS Servers automatically: Select this option to allow the router to automatically obtain IPv6 DNS server IP addresses.

Use the following IPv6 DNS Server: Select this option to manually enter the IPv6 DNS server IP addresses.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is : Auto Detection

IPv6 DNS SETTINGS

Obtain DNS server address automatically or enter a specific DNS server address.

Obtain IPv6 DNS Servers automatically

Use the following IPv6 DNS Servers

Primary DNS Server :

Secondary DNS Server :

In this section, the following parameters can be configured:

Enable DHCP-PD: Tick this option to enable the DHCP Prefix Delegation feature.

LAN IPv6 Address: Enter the LAN IPv6 address here.

LAN IPv6 Link-Local Address: This field will display the LAN IPv6 link-local address.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Enable Automatic DHCP-PD in LAN: Tick this option to enable automatic DHCP-PD in LAN.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

LAN IPV6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

Enable DHCP-PD :

LAN IPv6 Address : /64

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network. You can also enable DHCP-PD to delegate prefixes for routers in your LAN.

Enable Automatic IPv6 address assignment :

Enable Automatic DHCP-PD in LAN :

Autoconfiguration Type : SLAAC+RDNSS

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Enable Automatic DHCP-PD in LAN: Tick this option to enable automatic DHCP-PD in LAN.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Enable Automatic DHCP-PD in LAN: Tick this option to enable automatic DHCP-PD in LAN.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network. You can also enable DHCP-PD to delegate prefixes for routers in your LAN.

Enable Automatic IPv6 address assignment :

Enable Automatic DHCP-PD in LAN :

Autoconfiguration Type : SLAAC+Stateless DHCP ▾

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network. You can also enable DHCP-PD to delegate prefixes for routers in your LAN.

Enable Automatic IPv6 address assignment :

Enable Automatic DHCP-PD in LAN :

Autoconfiguration Type : Stateful DHCPv6 ▾

IPv6 Address Range (Start) : ::00 3

IPv6 Address Range (End) : ::00 16

IPv6 Address Lifetime : (minutes)

Save Settings

Don't Save Settings

IPv6 Connection Type – Static IPv6

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **Static IPv6** option.

In this section, the following parameters can be configured:

Use Link-Local Address: Tick this option to use the link-local address.

IPv6 Address: After choosing not to use the link-local address, enter the IPv6 address here.

Subnet Prefix Length: After choosing not to use the link-local address, enter the subnet prefix length value here.

Default Gateway: Enter the default gateway IPv6 address here.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

In this section, the following parameters can be configured:

LAN IPv6 Address: Enter the LAN IPv6 address here.

LAN IPv6 Link-Local Address: This field will display the LAN IPv6 link-local address here.

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is :

WAN IPv6 ADDRESS SETTINGS

Enter the IPv6 address information provided by your Internet Service Provider (ISP).

Use Link-Local Address :

IPv6 Address :

Subnet Prefix Length :

Default Gateway :

Primary DNS Server :

Secondary DNS Server :

LAN IPv6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

LAN IPv6 Address : /64

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+RDNSS

Router Advertisement Lifetime : (minutes)

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+Stateless DHCP

Router Advertisement Lifetime : (minutes)

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

IPv6 Connection Type – Auto-configuration (SLAAC/DHCPv6)

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **Auto-configuration (SLAAC/DHCPv6)** option.

In this section, the following parameters can be configured:

Obtain IPv6 DNS Servers automatically: Select this option to allow the router to automatically obtain IPv6 DNS server IP addresses.

Use the following IPv6 DNS Server: Select this option to manually enter the IPv6 DNS server IP addresses.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : Stateful DHCPv6 ▼

IPv6 Address Range (Start) : :00

IPv6 Address Range (End) : :00

IPv6 Address Lifetime : (minutes)

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is : Autoconfiguration(SLAAC/DHCPv6) ▼

IPv6 DNS SETTINGS

Obtain DNS server address automatically or enter a specific DNS server address.

Obtain IPv6 DNS Servers automatically
 Use the following IPv6 DNS Servers

Primary DNS Server :

Secondary DNS Server :

In this section, the following parameters can be configured:

Enable DHCP-PD: Tick this option to enable the DHCP Prefix Delegation feature.

LAN IPv6 Address: Enter the LAN IPv6 address here.

LAN IPv6 Link-Local Address: This field will display the LAN IPv6 link-local address.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Enable Automatic DHCP-PD in LAN: Tick this option to enable automatic DHCP-PD in LAN.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

LAN IPV6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

Enable DHCP-PD :

LAN IPv6 Address : /64

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network. You can also enable DHCP-PD to delegate prefixes for routers in your LAN.

Enable Automatic IPv6 address assignment :

Enable Automatic DHCP-PD in LAN :

Autoconfiguration Type : SLAAC+RDNSS ▼

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Enable Automatic DHCP-PD in LAN: Tick this option to enable automatic DHCP-PD in LAN.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Enable Automatic DHCP-PD in LAN: Tick this option to enable automatic DHCP-PD in LAN.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network. You can also enable DHCP-PD to delegate prefixes for routers in your LAN.

Enable Automatic IPv6 address assignment :

Enable Automatic DHCP-PD in LAN :

Autoconfiguration Type : SLAAC+Stateless DHCP ▾

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network. You can also enable DHCP-PD to delegate prefixes for routers in your LAN.

Enable Automatic IPv6 address assignment :

Enable Automatic DHCP-PD in LAN :

Autoconfiguration Type : Stateful DHCPv6 ▾

IPv6 Address Range (Start) : ::00 3

IPv6 Address Range (End) : ::00 16

IPv6 Address Lifetime : (minutes)

Save Settings

Don't Save Settings

IPv6 Connection Type – PPPoE

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **PPPoE** option.

In this section, the following parameters can be configured:

PPPoE Session: Select the PPPoE session used here. To share this connection with IPv4, select the **Share with IPv4** option. To create a new connection, select the **Create a new session** option.

Address Mode: Select the PPPoE address mode here. Options to choose from are **Dynamic IP** and **Static IP**.

IP Address: After selecting the **Static IP** option as the address mode, enter the static IPv6 address here.

User Name: Enter the IPv6 PPPoE username here.

Password: Enter the IPv6 PPPoE password here.

Verify Password: Enter the IPv6 PPPoE password here again to verify.

Service Name: Enter the service name here. This field is optional.

Reconnect Mode: Select this reconnect mode here. Options to choose from are **Always on**, **On demand**, and **Manual**.

Maximum Idle Time: Enter the maximum idle time value here.

MTU: Enter the Maximum Transmission Unit (MTU) value here.

In this section, the following parameters can be configured:

Obtain IPv6 DNS Servers automatically: Select this option to allow the router to automatically obtain IPv6 DNS server IP addresses.

Use the following IPv6 DNS Server: Select this option to manually enter the IPv6 DNS server IP addresses.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is :

PPPOE INTERNET CONNECTION TYPE :

Enter the information provided by your Internet Service Provider (ISP).

PPPoE Session : Share with IPv4 Create a new session

Address Mode : Dynamic IP Static IP

IP Address :

Username :

Password :

Verify Password :

Service Name : (optional)

Reconnect Mode : Always on On demand Manual

Maximum Idle Time : (minutes, 0=infinite)

MTU : (bytes) MTU default = 1492

IPv6 DNS SETTINGS

Obtain DNS server address automatically or enter a specific DNS server address.

Obtain IPv6 DNS Servers automatically

Use the following IPv6 DNS Servers

Primary DNS Server :

Secondary DNS Server :

In this section, the following parameters can be configured:

Enable DHCP-PD: Tick this option to enable the DHCP Prefix Delegation feature.

LAN IPv6 Address: Enter the LAN IPv6 address here.

LAN IPv6 Link-Local Address: This field will display the LAN IPv6 link-local address.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

LAN IPv6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

Enable DHCP-PD :

LAN IPv6 Address : /64

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+RDNSS ▼

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+Stateless DHCP ▼

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

IPv6 Connection Type – IPv6 in IPv4 Tunnel

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **IPv6 in IPv4 Tunnel** option.

In this section, the following parameters can be configured:

Remote IPv4 Address: Enter the remote IPv4 address here.

Remote IPv6 Address: Enter the remote IPv6 address here.

Local IPv4 Address: Enter the local IPv4 address here.

Local IPv6 Address: Enter the local IPv6 address here.

Subnet Prefix Length: Enter the subnet prefix length value here.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : Stateful DHCPv6 ▼

IPv6 Address Range (Start) : ::00

IPv6 Address Range (End) : ::00

IPv6 Address Lifetime : (minutes)

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is : IPv6 in IPv4 Tunnel ▼

IPv6 IN IPV4 TUNNEL SETTINGS

Enter the IPv6 in IPv4 Tunnel information provided by your Tunnel Broker.

Remote IPv4 Address :

Remote IPv6 Address :

Local IPv4 Address :

Local IPv6 Address :

Subnet Prefix Length :

In this section, the following parameters can be configured:

Obtain IPv6 DNS Servers automatically: Select this option to allow the router to automatically obtain IPv6 DNS server IP addresses.

Use the following IPv6 DNS Server: Select this option to manually enter the IPv6 DNS server IP addresses.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

IPv6 DNS SETTINGS

Obtain DNS server address automatically or enter a specific DNS server address.

Obtain IPv6 DNS Servers automatically
 Use the following IPv6 DNS Servers

Primary DNS Server :

Secondary DNS Server :

In this section, the following parameters can be configured:

Enable DHCP-PD: Tick this option to enable the DHCP Prefix Delegation feature.

LAN IPv6 Address: Enter the LAN IPv6 address here.

LAN IPv6 Link-Local Address: This field will display the LAN IPv6 link-local address.

LAN IPv6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

Enable DHCP-PD :

LAN IPv6 Address : /64

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : ▼

Router Advertisement Lifetime : (minutes)

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+Stateless DHCP

Router Advertisement Lifetime : (minutes)

Save Settings

Don't Save Settings

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : Stateful DHCPv6

IPv6 Address Range (Start) : ::00 3

IPv6 Address Range (End) : ::00 16

IPv6 Address Lifetime : (minutes)

Save Settings

Don't Save Settings

IPv6 Connection Type – 6to4

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **6to4** option.

In this section, the following parameters can be configured:

6to4 Relay: Enter the 6to4 relay address here.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

In this section, the following parameters can be configured:

LAN IPv6 Address: Enter the LAN IPv6 address here.

LAN IPv6 Link-Local Address: This field displays the LAN IPv6 link-local address.

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is :

WAN IPv6 ADDRESS SETTINGS

Enter the IPv6 address information provided by your Internet Service Provider (ISP).

6to4 Address :

6to4 Relay :

Primary DNS Server :

Secondary DNS Server :

LAN IPv6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

LAN IPv6 Address : xxxx:xxxx:xxxx: ::1 /64

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+RDNSS ▼

Router Advertisement Lifetime : (minutes)

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+Stateless DHCP ▼

Router Advertisement Lifetime : (minutes)

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

IPv6 Connection Type – 6rd

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **6rd** option.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : Stateful DHCPv6 ▼

IPv6 Address Range (Start) : ::00

IPv6 Address Range (End) : ::00

IPv6 Address Lifetime : (minutes)

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is : 6rd ▼

In this section, the following parameters can be configured:

Enable Hub and Spoke Mode: Tick this option to enable the hub and spoke mode.

6rd Configuration: Select the 6rd configuration option here. Options to choose from are **6rd DHCPv4 option** and **Manual Configuration**.

6rd IPv6 Prefix: Enter the 6rd IPv6 address and prefix value here.

Mask Length: Enter the IPv4 mask length here.

6rd Border Relay IPv4 Address: Enter the 6rd border relay IPv4 address here.

Primary DNS Server: Enter the primary IPv6 DNS server address here.

Secondary DNS Server: Enter the secondary IPv6 DNS server address here.

In this section, the **LAN IPv6 Address** and **LAN IPv6 Link-Local Address** will be displayed.

WAN IPV6 ADDRESS SETTINGS

Enter the IPv6 address information provided by your Internet Service Provider (ISP).

Enable Hub and Spoke Mode :

6rd Configuration : 6rd DHCPv4 option Manual Configuration

6rd IPv6 Prefix : /

IPv4 Address : Mask Length :

Assigned IPv6 Prefix :

Tunnel Link-Local Address :

6rd Border Relay IPv4 Address :

Primary DNS Server :

Secondary DNS Server :

LAN IPV6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

LAN IPv6 Address :

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+RDNSS** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

Router Advertisement Lifetime: After selecting **SLAAC+Stateless DHCP** as the auto-configuration type, enter the router advertisement lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+RDNSS

Router Advertisement Lifetime : (minutes)

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : SLAAC+Stateless DHCP

Router Advertisement Lifetime : (minutes)

In this section, the following parameters can be configured:

Enable Automatic IPv6 address assignment: Tick this option to enable automatic IPv6 address assignment.

Autoconfiguration Type: Select the IPv6 auto-configuration type here. Options to choose from are **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, and **Stateful DHCPv6**.

IPv6 Address Range (Start): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the starting IPv6 address and prefix for the range here.

IPv6 Address Range (End): After selecting **Stateful DHCPv6** as the auto-configuration type, enter the ending IPv6 address and prefix for the range here.

IPv6 Address Lifetime: After selecting **Stateful DHCPv6** as the auto-configuration type, enter the IPv6 address lifetime value here.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

IPv6 Connection Type – Local Connectivity Only

In this section, the following parameters can be configured:

My IPv6 Connection is: Select the IPv6 Internet connection type that will be used by this router. Options to choose from are **Auto Detection**, **Static IPv6**, **Auto-configuration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IP4 Tunnel**, **6to4**, **6rd**, and **Local Connectivity Only**. In this section we'll discuss the **Local Connectivity Only** option.

ADDRESS AUTOCONFIGURATION SETTINGS

Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Enable Automatic IPv6 address assignment :

Autoconfiguration Type : Stateful DHCPv6 ▼

IPv6 Address Range (Start) : ::00

IPv6 Address Range (End) : ::00

IPv6 Address Lifetime : (minutes)

IPv6 CONNECTION TYPE

Choose the mode to be used by the router to connect to the IPv6 Internet.

My IPv6 Connection is : Local Connectivity Only ▼

In this section the **LAN IPv6 Link-Local Address** will be displayed.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

LAN IPV6 ADDRESS SETTINGS

Use this section to configure the internal network settings of your router.

LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

Save Settings

Don't Save Settings

mydlink™ Settings

To access the **mydlink™ Settings** page, click on the **Setup** menu link, at the top, and then click on the **mydlink™ Settings** menu link, on the left.

On this page we can configure the mydlink™ settings used by this product.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET
WIRELESS SETTINGS
NETWORK SETTINGS
STORAGE
MEDIA SERVER
IPV6
MYDLINK SETTINGS

MYDLINK SETTINGS

Setting and registering your product with mydlink will allow you to use its mydlink cloud services features, including online access and management of your device through mydlink portal website.

MYDLINK

mydlink Service : Non-Registered
mydlink E-mail :

REGISTER MYDLINK SERVICE

Register mydlink Service

In this section the current status of the mydlink™ service is displayed.

MYDLINK


mydlink Service : Non-Registered
mydlink E-mail :

Click the **Register mydlink Service** button to access the mydlink™ service login or registration page.

REGISTER MYDLINK SERVICE

Register mydlink Service

After clicking the **Register mydlink Service** button, the following page will be available.

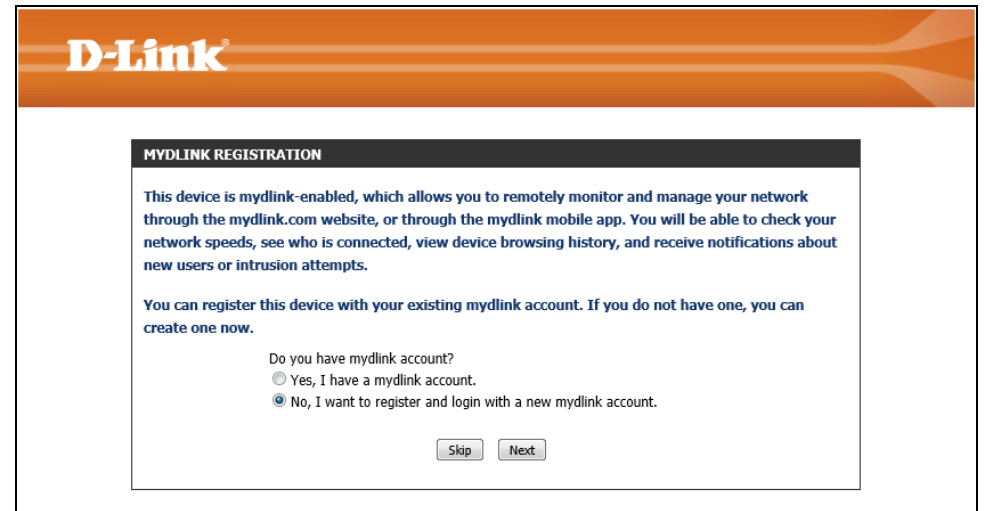

D-Link

MYDLINK REGISTRATION

This device is mydlink-enabled, which allows you to remotely monitor and manage your network through the mydlink.com website, or through the mydlink mobile app. You will be able to check your network speeds, see who is connected, view device browsing history, and receive notifications about new users or intrusion attempts.

You can register this device with your existing mydlink account. If you do not have one, you can create one now.

Do you have mydlink account?

Yes, I have a mydlink account.

No, I want to register and login with a new mydlink account.

The mydlink™ service allows user to use the mydlink™ cloud services. These services include online access and management of this device through the mydlink™ portal website


In this section, the following parameters can be configured:

Yes, I have a mydlink account: Select this option if you've already registered a mydlink™ account and simply want to link this product to your account.

No, I want to register and login with a new mydlink account: Select this option to register a new mydlink™ account and then login afterwards.

Click the **Next** button to accept the changes made and continue to the next step.

Click the **Skip** button to discard the changes made and return to the main page.

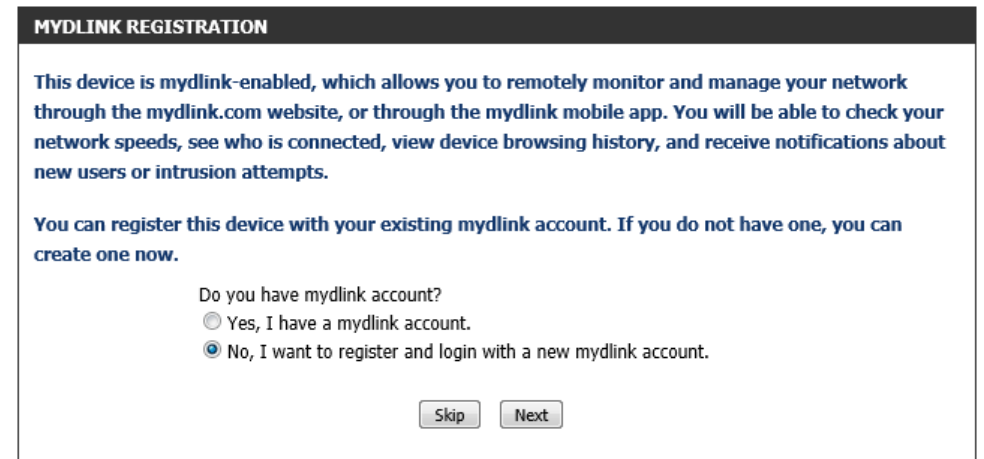

MYDLINK REGISTRATION

This device is mydlink-enabled, which allows you to remotely monitor and manage your network through the mydlink.com website, or through the mydlink mobile app. You will be able to check your network speeds, see who is connected, view device browsing history, and receive notifications about new users or intrusion attempts.

You can register this device with your existing mydlink account. If you do not have one, you can create one now.

Do you have mydlink account?

Yes, I have a mydlink account.

No, I want to register and login with a new mydlink account.

After selecting to register a new account, the following page will be available and the following parameters can be configured:

E-mail Address (Account Name): Enter your e-mail address here.

Password: Enter the password that you want to use for this account here.

Confirm Password: Enter the password that you want to use for this account here again to verify.

Last Name: Enter your last name here.

First Name: Enter your first name here.

I Accept the mydlink terms and conditions: Tick this option after you've read through the terms and conditions and agreed to them. An internet connection is needed to read through the terms and conditions.

Click the **Skip** button to discard the changes made and return to the main page.

Click the **Sign up** button to accept the changes made and continue to the next step.

Click the **Prev** button to return to the previous page.

After successfully registering your new mydlink™ account the following page will be available. A verification e-mail will be sent to your e-mail account. After verifying your e-mail account, you can click the **Login** button.

Click the **Skip** button to return to the main page.

After clicking to **Login** button, the following page will be available.

Enter your **E-Mail Address (Account Name)** and **Password** in the spaces provided and click on the **Login** button.

Click the **Skip** button to return to the main page.

Click the **Prev** button to return to the previous page.

MYDLINK REGISTRATION

Please fulfill the options to complete the registration.

E-mail Address (Account Name) :

Password :

Confirm Password :

Last name :

First Name :

[I Accept the mydlink terms and conditions.](#)

MYDLINK REGISTRATION

To complete your mydlink registration, please check your Inbox for an email with confirmation instructions. After confirming your email address, click the Login button.

MYDLINK REGISTRATION

E-mail Address (Account Name) :

Password :

After successfully registering this router to your mydlink™ service, this page will be displayed.

The screenshot shows the D-Link web interface for a DSL-2890AL router. The top navigation bar includes 'DSL-2890AL //', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various settings categories: INTERNET, WIRELESS SETTINGS, NETWORK SETTINGS, STORAGE, MEDIA SERVER, IPV6, and MYDLINK SETTINGS. The main content area is titled 'MYDLINK SETTINGS' and contains the following information:

- MYDLINK SETTINGS**: Setting and registering your product with mydlink will allow you to use its mydlink cloud services features, including online access and management of your device through mydlink portal website.
- MYDLINK**: mydlink Service : Registered, mydlink E-mail : [REDACTED]
- REGISTER MYDLINK SERVICE**: Register mydlink Service

Advanced Category

The **Advanced** category is designed to assist the user with more advanced configurations, concerning the other features found on this product.

The following pages can be found in the **Advanced** category:

- **Virtual Server** - On this page we can configure the virtual server settings of this router.
- **Port Forwarding** - On this page we can configure the port forwarding settings of this router.
- **Port Triggering** - On this page we can configure the port triggering settings of this router.
- **QoS Engine** - On this page we can configure the Quality of Service (QoS) engine used by this router.
- **Network Filtering** - On this page we can configure the network filtering rules used by this router.
- **Access Control** - On this page we can configure access control rules used by this router.
- **Website Filter** - On this page we can configure website filtering rules used by this router.
- **Inbound Filter** - On this page we can configure inbound filtering rules used by this router.
- **Firewall Settings** - On this page we can configure the firewall settings of this router.
- **Routing** - On this page we can configure IPv4 routing rules used by this router.
- **Advanced Wireless** - On this page we can configure more advanced wireless settings on this router.
- **Wi-Fi Protected Setup** - On this page we can configure the Wi-Fi Protected Setup (WPS) settings on this router.
- **Advanced Network** - On this page we can configure more advanced network settings on this router.
- **Guest Wi-Fi** - On this page we can configure the guest Wi-Fi settings of this router.
- **IPv6 Firewall** - On this page we can configure the IPv6 firewall rules used by this router.
- **IPv6 Routing** - On this page we can configure the IPv6 routing rules used by the router.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

VIRTUAL SERVER

The Virtual Server option allows you to define a single public port on your router for redirection to an internal LAN IP Address and Private LAN port if required. This feature is useful for hosting online services such as FTP or Web Servers.

Save Settings Don't Save Settings

24 - VIRTUAL SERVERS LIST

Remaining number of rules that can be created: 24

	Name	IP Address	Port	Traffic Type	Schedule
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Private Port		Inbound Filter Allow All
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Private Port		Inbound Filter Allow All
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Private Port		Inbound Filter Allow All
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name >>	<< Computer Name >>	Private Port		Inbound Filter Allow All

Helpful Hints...

- Check the **Application Name** drop down menu for a list of predefined server types. If you select one of the predefined server types, click the arrow button next to the drop down menu to fill out the corresponding field.
- You can select a computer from the list of DHCP clients in the **Computer Name** drop down menu, or you can manually enter the IP address of the computer at which you would like to open the specified port.
- Select a schedule for when the virtual server will be enabled. If you do not see the schedule you need in the list of schedules, go to the **Tools -> Schedules** screen and create a new schedule.
- Select a filter that restricts the Internet hosts that can access this virtual server to hosts that you trust. If you do not see the filter you need in the list of filters, go to the **Advanced -> Inbound**

Virtual Server

To access the **Virtual Server** page, click on the **Advanced** menu link, at the top, and then click on the **Virtual Server** menu link, on the left.

On this page we can configure the virtual server settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

VIRTUAL SERVER

The Virtual Server option allows you to define a single public port on your router for redirection to an internal LAN IP Address and Private LAN port if required. This feature is useful for hosting online services such as FTP or Web Servers.

Save Settings Don't Save Settings

24 - VIRTUAL SERVERS LIST

Remaining number of rules that can be created: 24

	Name	IP Address	Port	Traffic Type	Schedule
<input type="checkbox"/>	<< Application name	<< Computer Name	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name	<< Computer Name	Private Port		Inbound Filter Allow All
<input type="checkbox"/>	<< Application name	<< Computer Name	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name	<< Computer Name	Private Port		Inbound Filter Allow All
<input type="checkbox"/>	<< Application name	<< Computer Name	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name	<< Computer Name	Private Port		Inbound Filter Allow All
<input type="checkbox"/>	<< Application name	<< Computer Name	Public Port	Protocol Both	Always
<input type="checkbox"/>	<< Application name	<< Computer Name	Private Port		Inbound Filter Allow All

Helpful Hints...

- Check the **Application Name** drop down menu for a list of predefined server types. If you select one of the predefined server types, click the arrow button next to the drop down menu to fill out the corresponding field.
- You can select a computer from the list of DHCP clients in the **Computer Name** drop down menu, or you can manually enter the IP address of the computer at which you would like to open the specified port.
- Select a schedule for when the virtual server will be enabled. If you do not see the schedule you need in the list of schedules, go to the **Tools -> Schedules** screen and create a new schedule.
- Select a filter that restricts the Internet hosts that can access this virtual server to hosts that you trust. If

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the rule.

Name: Enter or select the application name for the rule here.

IP Address: Enter or select the IP address or computer name for the rule here.

Public Port: Enter the public port number here.

Private Port: Enter the private port number here.

Protocol: Select the protocol type here. Options to choose from are **TCP**, **UDP**, **Both**, and **Other**.

Schedule: Select the time schedule option here. Customized time schedules can be created and used.

Inbound Filter: Select the inbound filter option here. Options to choose from are **Allow All** and **Deny All**.

24 - VIRTUAL SERVERS LIST					
Remaining number of rules that can be created: 24					
<input type="checkbox"/>	Name	<< Application name ▼	Public Port	Protocol Both ▼	Schedule Always ▼
	IP Address	<< Computer Name ▼	Private Port		Inbound Filter Allow All ▼
<input type="checkbox"/>	Name	<< Application name ▼	Public Port	Protocol Both ▼	Schedule Always ▼
	IP Address	<< Computer Name ▼	Private Port		Inbound Filter Allow All ▼

Port Forwarding

To access the **Port Forwarding** page, click on the **Advanced** menu link, at the top, and then click on the **Port Forwarding** menu link, on the left.

On this page we can configure the port forwarding settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

PORT FORWARDING

This option is used to open multiple ports or a range of ports in your router and redirect data through those ports to a single PC on your network. This feature allows you to enter ports in the format, Port Ranges (100-150), Individual Ports (80, 68, 888), or Mixed (1020-5000, 689). This option is only applicable to the INTERNET session.

Save Settings Don't Save Settings

24 -- PORT FORWARDING RULES

Remaining number of rules that can be created: 24

Name	Application Name	Ports to Open	Schedule
<input type="checkbox"/>	<input type="text"/> << Application Name	TCP <input type="text"/>	Always
	IP Address <input type="text"/> << Computer Name	UDP <input type="text"/>	Inbound Filter Allow All
<input type="checkbox"/>	<input type="text"/> << Application Name	TCP <input type="text"/>	Always
	IP Address <input type="text"/> << Computer Name	UDP <input type="text"/>	Inbound Filter Allow All
<input type="checkbox"/>	<input type="text"/> << Application Name	TCP <input type="text"/>	Always
	IP Address <input type="text"/> << Computer Name	UDP <input type="text"/>	Inbound Filter Allow All

Helpful Hints...

- Check the **Application Name** drop-down menu for a list of pre-defined applications that you can select from. If you select one of the pre-defined applications, click the arrow button next to the drop-down menu to fill out the appropriate fields.
- You can select your computer from the list of DHCP clients in the **Computer Name** drop-down menu, or enter the IP address manually of the computer you would like to open the specified port to.
- Select a schedule for when the port forwarding will be enabled. If you do not see the schedule you need in the list of schedules, go to the **Tools -> Schedules** screen and create a new schedule.
- You can enter ports in various formats: Range (50-100) Individual (80,

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the rule.

Name: Enter or select the application name for the rule here.

IP Address: Enter or select the IP address or computer name for the rule here.

TCP: Enter the TCP port number(s) here. A single port or a range of ports can be entered. Separate ports with a comma or a hyphen.

UDP: Enter the UDP port number(s) here. A single port or a range of ports can be entered. Separate ports with a comma or a hyphen.

Schedule: Select the time schedule option here. Customized time schedules can be created and used.

Inbound Filter: Select **Allow All** (most common) or a created inbound filter.

24 -- PORT FORWARDING RULES			
Remaining number of rules that can be created: 24			
<input type="checkbox"/>	Name <input type="text"/>	<< Application Name ▼	TCP <input type="text"/>
	IP Address <input type="text"/>	<< Computer Name ▼	UDP <input type="text"/>
			Schedule Always ▼
			Inbound Filter Allow All ▼
<input type="checkbox"/>	Name <input type="text"/>	<< Application Name ▼	TCP <input type="text"/>
	IP Address <input type="text"/>	<< Computer Name ▼	UDP <input type="text"/>
			Schedule Always ▼
			Inbound Filter Allow All ▼

Port Triggering

To access the **Port Triggering** page, click on the **Advanced** menu link, at the top, and then click on the **Port Triggering** menu link, on the left.

On this page we can configure the port triggering settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

PORT TRIGGERING

The Port Triggering option is used to open single or multiple ports in your firewall when the router senses data sent to the Internet on an outgoing "Trigger" port or port range. Special Port Triggering apply to all computers on your internal network.

Save Settings Don't Save Settings

24 -- PORT TRIGGERING

Remaining number of rules that can be created: 24

	Name	Port Triggering	Port	Traffic Type	Schedule
<input type="checkbox"/>	<input type="text"/>	Port Triggering Port Triggering Name	Trigger <input type="text"/>	All	Always
			Firewall <input type="text"/>	All	
<input type="checkbox"/>	<input type="text"/>	Port Triggering Port Triggering Name	Trigger <input type="text"/>	All	Always
			Firewall <input type="text"/>	All	
<input type="checkbox"/>	<input type="text"/>	Port Triggering Port Triggering Name	Trigger <input type="text"/>	All	Always
			Firewall <input type="text"/>	All	

Helpful Hints...

- Use this feature if you are trying to execute one of the listed network applications and it is not communicating as expected.
- Use the **Application Name** drop-down menu to view a list of pre-defined applications that you can select from. If you select one of the pre-defined applications, click the arrow button next to the drop-down menu to fill out the appropriate fields.
- Select a schedule for when the service will be enabled. If you do not see the schedule you need in the list of schedules, go to the **Tools -> Schedules** screen and create a new schedule.
- [More...](#)

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the rule.

Name: Enter or select the application name for the rule here.

Trigger: Enter the trigger value here.

Firewall: Enter the firewall value here.

Traffic Type: Select the traffic type from the drop-down menu. Options to choose from are **All**, **TCP**, and **UDP**.

Schedule: Select the time schedule option here. Customized time schedules can be created and used.

24 -- PORT TRIGGERING					
Remaining number of rules that can be created: 24					
			Port	Traffic Type	Schedule
<input type="checkbox"/>	Name <input type="text"/>	Port Triggering << Port Triggering Name ▾	Trigger <input type="text"/>	All ▾	Always ▾
			Firewall <input type="text"/>	All ▾	
<input type="checkbox"/>	Name <input type="text"/>	Port Triggering << Port Triggering Name ▾	Trigger <input type="text"/>	All ▾	Always ▾
			Firewall <input type="text"/>	All ▾	


QoS Engine

To access the **QoS Engine** page, click on the **Advanced** menu link, at the top, and then click on the **QoS Engine** menu link, on the left.

On this page we can configure the Quality of Service (QoS) engine used by this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

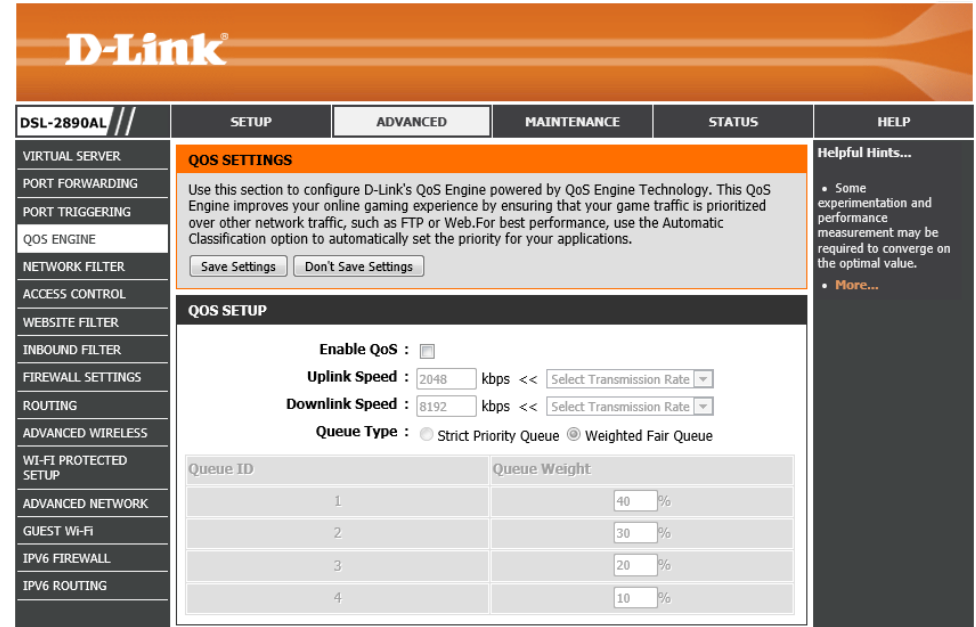

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

QoS SETTINGS

Use this section to configure D-Link's QoS Engine powered by QoS Engine Technology. This QoS Engine improves your online gaming experience by ensuring that your game traffic is prioritized over other network traffic, such as FTP or Web. For best performance, use the Automatic Classification option to automatically set the priority for your applications.

Save Settings Don't Save Settings

QoS SETUP

Enable QoS :

Uplink Speed : 2048 kbps << Select Transmission Rate

Downlink Speed : 8192 kbps << Select Transmission Rate

Queue Type : Strict Priority Queue Weighted Fair Queue

Queue ID	Queue Name	Queue Weight
1		40 %
2		30 %
3		20 %
4		10 %

Helpful Hints...

- Some experimentation and performance measurement may be required to converge on the optimal value.
- [More...](#)

In this section, the following parameters can be configured:

Enable QoS: Tick this option to enable the Quality of Service (QoS) engine.

Uplink Speed: Enter the uplink speed value here or select a predefined uplink speed option, from the drop-down menu.

Download Speed: Enter the download speed value here or select a predefined download speed option, from the drop-down menu.

Queue Type: Select the queue type here. Options to choose from are **Strict Priority Queue** and **Weighted Fair Queue**.

QOS SETUP

Enable QoS :

Uplink Speed : 2048 kbps << Select Transmission Rate ▼

Downlink Speed : 8192 kbps << Select Transmission Rate ▼

Queue Type : Strict Priority Queue Weighted Fair Queue

Queue ID	Queue Priority
1	Highest
2	Higher
3	Normal
4	Best Effort(default)

In this section, the following parameters can be configured:

Enable QoS: Tick this option to enable the Quality of Service (QoS) engine.

Uplink Speed: Enter the uplink speed value here or select a predefined uplink speed option, from the drop-down menu.

Download Speed: Enter the download speed value here or select a predefined download speed option, from the drop-down menu.

Queue Type: Select the queue type here. Options to choose from are **Strict Priority Queue** and **Weighted Fair Queue**.

Queue Weight: Enter the queue weight percentage for each queue ID in the spaces provided.

QOS SETUP

Enable QoS :

Uplink Speed : 2048 kbps << Select Transmission Rate ▼

Downlink Speed : 8192 kbps << Select Transmission Rate ▼

Queue Type : Strict Priority Queue Weighted Fair Queue

Queue ID	Queue Weight
1	40 %
2	30 %
3	20 %
4	10 %

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the rule.

Name: Enter the classification rule's name here.

Queue ID: Select the queue ID that will be used for this rule here.

Protocol: Enter or select the protocol that will be used for this rule here.

Local IP Range: Enter the local IP address range that will be used for this rule here. Two addresses must be specified. The first one is the starting IP address and the second one is the ending IP address in the range.

Remote IP Range: Enter the remote IP address range that will be used for this rule here. Two addresses must be specified. The first one is the starting IP address and the second one is the ending IP address in the range.

Application Port: Enter or select the application port option that will be used for this rule.

32 -- CLASSIFICATION RULES		
Remaining number of rules that can be created: 18		
Name Youtube	Queue ID 1 - Highest	Protocol TCP << ALL
<input checked="" type="checkbox"/> Local IP Range to		Application Port YOUTUBE
Remote IP Range to		<< ALL

Network Filter

To access the **Network Filter** page, click on the **Advanced** menu link, at the top, and then click on the **Network Filter** menu link, on the left.

On this page we can configure the network filtering rules used by this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link Web User Interface for a DSL-2890AL modem router. The page is titled "Network Filter" and is part of the "Advanced" configuration menu. The main content area is titled "MAC ADDRESS FILTER" and contains the following information:

The MAC (Media Access Controller) Address filter option is used to control network access based on the MAC Address of the network adapter. A MAC address is a unique ID assigned by the manufacturer of the network adapter. This feature can be configured to ALLOW or DENY network/Internet access.

Buttons: **Save Settings** and **Don't Save Settings**

24 -- MAC FILTERING RULES

Configure MAC Filtering below:
Turn MAC Filtering OFF

Remaining number of rules that can be created: 24

	MAC Address		DHCP Client List	Schedule
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name	Always

Each row in the table includes a "New Schedule" button.

Helpful Hints...

- Create a list of MAC addresses and choose whether to allow or deny them access to your network.
- Computers that have obtained an IP address from the router's DHCP server will be in the DHCP Client List. Select a device from the drop down menu and click the arrow to add that device's MAC to the list.
- Use the check box on the left to either enable or disable a particular entry.
- Use the **Always** drop down menu if you have previously defined a schedule in the router. If not, click on the **New Schedule** button to add one.
- [More...](#)

In this section, the following parameters can be configured:

Configure MAC Filtering below: Select the MAC filtering method here. Select the **Turn MAC Filtering OFF** option to disable this feature. Select the **Turn MAC Filtering ON and ALLOW computers listed to access the network** option to enable this feature and only allow the computers, by MAC address, to access the network. Select the **Turn MAC Filtering ON and DENY computers listed to access the network** option to enable this feature and only deny the computers, by MAC address, access to the network.

Checkbox: Tick this option to enable the rule.

MAC Address: Enter the MAC address that will be filtered here.

DHCP Client List: Select the DHCP client, from the drop-down menu, that will be filtered here.

Schedule: Select the time schedule option here. Customized time schedules can be created and used.

24 -- MAC FILTERING RULES

Configure MAC Filtering below:
Turn MAC Filtering ON and ALLOW computers listed to access the network ▼

Remaining number of rules that can be created: **24**

	MAC Address		DHCP Client List	Schedule	
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name ▼	Always ▼	New Schedule
<input type="checkbox"/>	<input type="text"/>	<<	Computer Name ▼	Always ▼	New Schedule

Access Control

To access the **Access Control** page, click on the **Advanced** menu link, at the top, and then click on the **Access Control** menu link, on the left.

On this page we can configure access control rules used by this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link web interface for the DSL-2890AL modem router. The top navigation bar includes 'SETUP', 'ADVANCED' (selected), 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various configuration options, with 'ACCESS CONTROL' selected. The main content area displays the 'ACCESS CONTROL' settings, including a description of the feature and two buttons: 'Save Settings' and 'Don't Save Settings'. The 'Enable Access Control' checkbox is currently unchecked. A 'Helpful Hints...' sidebar on the right provides additional instructions.

In this section, the following parameters can be configured:

Enable Access Control: Tick this option to enable the access control feature.

Click the **Add Policy** button to initiate the access control rule addition wizard.

This close-up screenshot shows the 'Enable Access Control' checkbox, which is now checked. Below it is the 'Add Policy' button, which is used to initiate the access control rule addition wizard.

After clicking the **Add Policy** rule, the following page will be available.

The screenshot shows the D-Link web interface for a DSL-2890AL modem router. The top navigation bar includes 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar menu lists various configuration options, with 'ACCESS CONTROL' highlighted. The main content area is titled 'ADD NEW POLICY' and contains the following text:

ADD NEW POLICY

This wizard will guide you through the following steps to add a new policy for Access Control.

- Step 1 - Choose a unique name for your policy
- Step 2 - Select a schedule
- Step 3 - Select the machine to which this policy applies
- Step 4 - Select filtering method
- Step 5 - Select filters
- Step 6 - Configure Web Access Logging

At the bottom of the wizard, there are four buttons: 'Prev', 'Next', 'Save', and 'Cancel'.

Add New Policy - Wizard

In this step, the application flow of this wizard will be displayed.

Click the **Next** button to accept the changes made and continue to the next step.
Click the **Cancel** button to discard the changes made and return to the main page.

This is another screenshot of the 'ADD NEW POLICY' wizard, showing the same steps and navigation buttons as the previous screenshot.

ADD NEW POLICY

This wizard will guide you through the following steps to add a new policy for Access Control.

- Step 1 - Choose a unique name for your policy
- Step 2 - Select a schedule
- Step 3 - Select the machine to which this policy applies
- Step 4 - Select filtering method
- Step 5 - Select filters
- Step 6 - Configure Web Access Logging

At the bottom of the wizard, there are four buttons: 'Prev', 'Next', 'Save', and 'Cancel'.

Step 1: Choose Policy Name

In this step, we can configure the policy rule name. The following parameters can be configured:

Policy Name: Enter the access control policy rule name here.

Click the **Prev** button to return to the previous page.

Click the **Next** button to accept the changes made and continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main page.

The screenshot shows a web interface for 'STEP 1: CHOOSE POLICY NAME'. It features a dark header with the step title. Below the header, the text 'Choose a unique name for your policy.' is displayed. A label 'Policy Name :' is followed by an empty text input field. At the bottom, there are four buttons: 'Prev', 'Next', 'Save', and 'Cancel'.

Step 2: Select Schedule

In this step, we can configure the time schedule that will be applied to this rule. The following parameters can be configured:

Schedule: Select the time schedule that will be used for this rule from this drop-down menu.

Details: This field will display the details associated with the time schedule selected.

Click the **Prev** button to return to the previous page.

Click the **Next** button to accept the changes made and continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main page.

The screenshot shows a web interface for 'STEP 2: SELECT SCHEDULE'. It features a dark header with the step title. Below the header, the text 'Choose a schedule to apply to this policy.' is displayed. There is a dropdown menu with 'Always' selected. Below it, a label 'Details :' is followed by a text input field containing the word 'Always'. At the bottom, there are four buttons: 'Prev', 'Next', 'Save', and 'Cancel'.


Step 3: Select Machine

In this step, we can configure which computers will be involved in this access control rule. The following parameters can be configured:

Address Type: Select the address type option here. Options to choose from are **IP**, **MAC**, and **Other Machines**.

IP Address: After selecting **IP** as the address type, enter the IP address of the local node here.

Machine Address: After selecting **MAC** as the address type, enter the MAC address of the local node here. Alternatively, click the **Clone Your PC's MAC Address** button of insert the MAC address of the computers currently used to access the Web UI.

Click the  icon to modify the specific entry.

Click the  icon to delete the specific entry.

Click the **Prev** button to return to the previous page.

Click the **Next** button to accept the changes made and continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main page.

Step 4: Select Filtering Method

In this step, we can select the filtering method that will be applied to this access rule. The following parameters can be configured:

Method: Select the filtering method used here. Select **Log Web Access Only**, to only allow web access to the nodes specified in the previous step. Select **Block All Access**, to block all access to the network. Select **Block Some Access**, to block access only to the conditions specified in the next step.

Apply Web Filter: Tick this option to enable web filtering.

Apply Advanced Port Filter: Tick this option to apply advanced port filters.

Click the **Prev** button to return to the previous page.

Click the **Next** button to accept the changes made and continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main page.

STEP 3: SELECT MACHINE



Select the machine to which this policy applies.

Specify a machine with its IP or MAC address, or select 'Other Machines' for machines that do not have a policy.

Address Type : IP MAC Other Machines

IP Address : << Computer Name ▾

Machine Address : << Computer Name ▾

Machine	Edit	Delete
192.168.1.10		

STEP 4: SELECT FILTERING METHOD

Select the method for filtering.

Method : Log Web Access Only Block All Access Block Some Access

Apply Web Filter :

Apply Advanced Port Filters :

Step 5: Port Filter

In this step, we can configure advanced port filters. The following parameters can be configured:

Enable: Tick this option to enable the rule.

Name: Enter the name for the rule here.

Dest IP Start: Enter the starting destination IP address used in the rule here.

Dest IP End: Enter the ending destination IP address used in the rule here.

Protocol: Select the protocol type that will be used here. Options to choose from are **ICMP**, **TCP**, and **UDP**.

Dest Port Start: Enter the starting destination port number here.

Dest Port End: Enter the ending destination port number here.

Click the **Prev** button to return to the previous page.

Click the **Next** button to accept the changes made and continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main page.

STEP 5: PORT FILTER

Add Port Filters Rules.

Specify rules to prohibit access to specific IP addresses and ports.

Enable	Name	Dest IP Start	Dest IP End	Protocol	Dest Port Start	Dest Port End
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535
<input type="checkbox"/>	<input type="text"/>	0.0.0.0	255.255.255.255	Any	1	65535

Step 6: Configure Web Access Logging

In this step, we can enable or disable the web access logging feature. The following parameters can be configured:

Web Access Logging: Select to enable or disable the web access logging feature.

Click the **Prev** button to return to the previous page.


Click the **Save** button to accept the changes made and finish the wizard.

Click the **Cancel** button to discard the changes made and return to the main page.

STEP 6: CONFIGURE WEB ACCESS LOGGING

Web Access Logging :
 Disabled
 Enabled



After the wizard was completed, rules will be displayed in this section. Tick the **Enable** option to enable the specified rule.

Click the  icon to modify the specific entry.

Click the  icon to delete the specific entry.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

POLICY TABLE							
Enable	Policy	Machine	Filtering	Logged	Schedule		
<input checked="" type="checkbox"/>	BlockHTTP	192.168.1.10	Block Some Access	Yes	Always		

Website Filter

To access the **Website Filter** page, click on the **Advanced** menu link, at the top, and then click on the **Website Filter** menu link, on the left.

On this page we can configure website filtering rules used by this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link DSL-2890AL Web User Interface. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar lists various configuration options, with WEBSITE FILTER selected. The main content area is titled "WEBSITE FILTER" and contains the following text: "The Website Filter option allows you to set up a list of Web sites you would like to allow or deny through your network. To use this feature, you must also select the 'Apply Web Filter' checkbox in the Access Control section." Below this text are two buttons: "Save Settings" and "Don't Save Settings".

Below the introductory text is a section titled "40 -- WEBSITE FILTERING RULES". It contains the text "Configure Website Filter below:" followed by a dropdown menu set to "DENY computers access to ONLY these sites" and a "Clear the list below..." button. Below these elements is a table with the header "Website URL/Domain" and several empty rows for entering website URLs or domains.

On the right side of the interface, there is a "Helpful Hints..." section with the following text:

- Create a list of Websites that you would like the devices on your network to be allowed or denied access to.
- Keywords can be entered in this list in order to block any URL containing the keyword entered.
- Use with [Advanced -> Access Control](#).
- [More...](#)

In this section, the following parameters can be configured:

Configure Website Filter below: Select the website filtering method here. Select **DENY computers access to ONLY these sites**, to deny access to the websites and domains specified. Select the **ALLOW computers access to ONLY these sites**, to only allow access to the websites and domains specified.

Website URL/Domain: Enter the website Uniform Resource Locator (URL) or domain name that will be blocked or allowed in the spaces provided.

Click the **Clear the list below...** button to remove all the Website URL/Domain entries.

This is a close-up view of the "40 -- WEBSITE FILTERING RULES" section from the previous screenshot. It shows the "Configure Website Filter below:" text, the dropdown menu set to "DENY computers access to ONLY these sites", and the "Clear the list below..." button. Below these is a table with the header "Website URL/Domain" and several empty rows for entering website URLs or domains.

Inbound Filter

To access the **Inbound Filter** page, click on the **Advanced** menu link, at the top, and then click on the **Inbound Filter** menu link, on the left.

On this page we can configure inbound filtering rules used by this router.

D-Link

DSL-2890AL // SETUP **ADVANCED** MAINTENANCE STATUS HELP

INBOUND FILTER

The Inbound Filter option is an advanced method of controlling data received from the Internet. With this feature you can configure inbound data filtering rules that control data based on an IP address range.

Inbound Filters can be used for limiting access to a server on your network to a system or group of systems. Filter rules can be used with Virtual Server, Port Forwarding, or Remote Administration features.

ADD INBOUND FILTER RULE

Name :

Action :

Remote IP Range	Enable	Remote IP Start	Remote IP End
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>

INBOUND FILTER RULES LIST

Name	Action	Remote IP Range

Helpful Hints...

- Give each rule a **Name** that is meaningful to you.
- Each rule can either **Allow** or **Deny** access from the WAN.
- Up to eight ranges of WAN IP addresses can be controlled by each rule. The checkbox by each IP range can be used to disable ranges already defined.
- The starting and ending IP addresses are WAN-side address.
- Click the **Add** button to store a finished rule in the Rules List below.
- Click the **Edit** icon in the Rules List to change a rule.
- Click the **Delete** icon in the Rules List to permanently remove a rule.
- [More...](#)

In this section, the following parameters can be configured:

Name: Enter the name of the Inbound filter rule here.

Action: Select the action that will be taken by this rule here. Options to choose from are **Allow** and **Deny**.

Enable: Tick this option to enable this entry.

Remote IP Start: Enter the starting remote IP address here.

Remote IP End: Enter the ending remote IP address here.

Click the **Add** button to add or modify the rule.

Click the **Cancel** button to discard the changes made.


ADD INBOUND FILTER RULE

Name :

Action : Allow ▾



Remote IP Range :	Enable	Remote IP Start	Remote IP End
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>
<input type="checkbox"/> 0.0.0.0	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>	<input type="text" value="255.255.255.255"/>

In this section, a list of configured inbound filter rules will be displayed.

Click the  icon to modify the specific entry.

Click the  icon to delete the specific entry.

INBOUND FILTER RULES LIST

Name	Action	Remote IP Range		
Block	Deny	1.1.1.1-197.80.203.150,197.80.203.152-223.255.255.255		

Firewall Settings

To access the **Firewall Settings** page, click on the **Advanced** menu link, at the top, and then click on the **Firewall Settings** menu link, on the left.

On this page we can configure the firewall settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

FIREWALL & DMZ SETTINGS

DMZ means "Demilitarized Zone". DMZ allows computers behind the router firewall to be accessible to Internet traffic. Typically, your DMZ would contain Web servers, FTP servers and others.

Save Settings Don't Save Settings

FIREWALL SETTINGS

Enable SPI :

NAT ENDPOINT FILTERING

UDP Endpoint Filtering : Endpoint Independent
 Address Restricted
 Port And Address Restricted

TCP Endpoint Filtering : Endpoint Independent
 Address Restricted
 Port And Address Restricted

ANTI-SPOOF CHECKING

Enable anti-spoof checking :

DMZ HOST

The DMZ (Demilitarized Zone) option lets you set a single computer on your network outside of the router. If you have a computer that cannot run Internet applications successfully from behind the router, then you can place the computer into the DMZ for unrestricted Internet access.

Helpful Hints...

- **DMZ:** Only enable the DMZ option as a last resort. If you are having trouble using an application from a computer behind the router, first try opening ports associated with the application in the Advanced Port Forwarding section.
- [More...](#)

In this section, the following parameters can be configured:

Enable SPI: Tick this option to enable the Stateful Packet Inspection (SPI) feature. SPI, also known as dynamic packet filtering, helps to prevent cyber-attacks. It validates that the traffic passing through the session conforms to the protocol.

FIREWALL SETTINGS

Enable SPI :

In this section, the following parameters can be configured:

UDP Endpoint Filtering: Select the UDP end-point filtering method here. The **Endpoint Independent** option will forward any UDP incoming traffic, sent to an open port, to the application that opened the port. The port will close if idled for 5 minutes. The **Address Restricted** will check whether UDP incoming traffic matches the IP address of the outgoing connection. The **Port And Address Restriction** option will check whether UDP incoming traffic matches the IP address and port of the outgoing connection.

TCP Endpoint Filtering: Select the TCP end-point filtering method here. The **Endpoint Independent** option will forward any TCP incoming traffic, sent to an open port, to the application that opened the port. The port will close if idled for 5 minutes. The **Address Restricted** will check whether TCP incoming traffic matches the IP address of the outgoing connection. The **Port And Address Restriction** option will check whether TCP incoming traffic matches the IP address and port of the outgoing connection.

In this section, the following parameters can be configured:

Enable anti-spoof checking: Tick this option to enable the anti-spoof checking feature.

In this section, the following parameters can be configured:

Enable DMZ: Tick this option to enable the Demilitarized Zone (DMZ) feature.

DMZ IP Address: Enter or select the local DMZ IP address here.

NAT ENDPOINT FILTERING

UDP Endpoint Filtering : Endpoint Independent
 Address Restricted
 Port And Address Restricted

TCP Endpoint Filtering : Endpoint Independent
 Address Restricted
 Port And Address Restricted

ANTI-SPOOF CHECKING

Enable anti-spoof checking :

DMZ HOST

The DMZ (Demilitarized Zone) option lets you set a single computer on your network outside of the router. If you have a computer that cannot run Internet applications successfully from behind the router, then you can place the computer into the DMZ for unrestricted Internet access.

Note: Putting a computer in the DMZ may expose that computer to a variety of security risks. Use of this option is only recommended as a last resort.

Enable DMZ :

DMZ IP Address : <<<

Computer Name

In this section, the following parameters can be configured:

PPTP: Tick this option to allow PPTP traffic. This feature allows multiple machines on the LAN to connect to their corporate network using the PPTP protocol.

IPSec (VPN): Tick this option to allow IPSec (VPN) traffic. This feature allows multiple VPN clients to connect to their corporate network using IPSec. Some VPN clients support traversal of IPSec through NAT. This ALG may interfere with the operation of such VPN clients. If you are having trouble connecting with your corporate network, try turning this ALG off. Please check with the system administrator of your corporate network whether your VPN client supports NAT traversal.

RSTP: Tick this option to allow RSTP traffic. This feature allows an application that uses Real Time Streaming Protocol to receive streaming media from the Internet. QuickTime and Real Player are some of the common applications using this protocol.

SIP: Tick this option to allow SIP traffic. This feature allows devices and applications using VoIP (Voice over IP) to communicate across NAT. Some VoIP applications and devices have the ability to discover NAT devices and work around them. This ALG may interfere with the operation of such devices. If you are having trouble making VoIP calls, try turning this ALG off.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

APPLICATION LEVEL GATEWAY (ALG) CONFIGURATION
PPTP :
IPSec (VPN) :
RTSP :
SIP :

Routing

To access the **Routing** page, click on the **Advanced** menu link, at the top, and then click on the **Routing** menu link, on the left.

On this page we can configure IPv4 routing rules used by this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

ROUTING

The Routing option allows you to define static routes to specific destinations.

Save Settings Don't Save Settings

32 -- ROUTE LIST

Remaining number of rules that can be created: 32

	Name	Destination IP	Metric	Interface
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	1	<input type="text"/>
	Netmask	Gateway		
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	1	<input type="text"/>
	Netmask	Gateway		
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	1	<input type="text"/>
	Netmask	Gateway		
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	1	<input type="text"/>
	Netmask	Gateway		

Helpful Hints...

- **Enable:** Specifies whether the entry will be enabled or disabled.
- **Interface:** Specifies the interface -- WAN -- that the IP packet must use to transit out of the router, when this route is used.
- **Destination IP:** The IP address of packets that will take this route.
- **Netmask:** One bit in the mask specifies which bits of the IP address must match.
- **Gateway:** The gateway IP address is the IP address of the router, if any, used to reach the specified destination.
- **More...**

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the selected route.

Name: Enter the name of the route here.

Netmask: Enter the Netmask address of the route here.

Destination IP: Enter the destination IP address of the route here.

Gateway: Enter the gateway IP address of the route here.

Metric: Enter the metric value for the route here.

Interface: Select the Interface that will use this route here.

32 -- ROUTE LIST

Remaining number of rules that can be created: 32

	Name	Destination IP	Metric	Interface
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	1	<input type="text"/>
	Netmask	Gateway		

Advanced Wireless

To access the **Advanced Wireless** page, click on the **Advanced** menu link, at the top, and then click on the **Advanced Wireless** menu link, on the left.

On this page we can configure more advanced wireless settings on this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

ADVANCED WIRELESS SETTINGS

These options are for users that wish to change the behavior of their 802.11n wireless radio from the standard settings. We do not recommend changing these settings from the factory defaults. Incorrect settings may impact the performance of your wireless radio. The default settings should provide the best wireless radio performance in most environments.

Save Settings Don't Save Settings

ADVANCED WIRELESS SETTINGS

Wireless Band : 2.4GHz Band

Transmit Power : High

WLAN Partition :

WMM Enable :

HT 20/40 Coexistence : Enable Disable

ADVANCED WIRELESS SETTINGS

Wireless Band : 5GHz Band

Transmit Power : High

WLAN Partition :

WMM Enable :

Save Settings Don't Save Settings

Helpful Hints...

- It is recommended that you leave these parameters with their default values. Adjusting them could limit the performance of your wireless network.
- Enabling WMM can help control latency and jitter when transmitting multimedia content over a wireless connection.
- [More...](#)

In this section, the following parameters can be configured:

Wireless Band: Displays the wireless band that can be configured.

Transmit Power: Select the wireless transmit power for the 2.4GHz band. Options to choose from are **High**, **Medium**, and **Low**.

WLAN Partition: Tick this option to enable the WLAN partition feature. This enables 802.11d operation. 802.11d is a wireless specification developed to allow the implementation of wireless networks in countries that cannot use the 802.11 standard. This feature should only be enabled if you are in a country that requires it.

WMM Enable: Display that the Wi-Fi Multimedia (WMM) feature is enabled. WMM is QoS for your wireless network. This will improve the quality of video and voice applications for your wireless clients.

HT 20/40 Coexistence: Select to enable or disable the HT 20/40 coexistence feature. Enable this option to reduce interference from other wireless networks in your area. If the channel width is operating at 40MHz and there is another wireless network's channel over-lapping and causing interference, the router will automatically change to 20MHz.

The screenshot shows the 'ADVANCED WIRELESS SETTINGS' section for the 2.4GHz band. The settings are as follows:

- Wireless Band : 2.4GHz Band
- Transmit Power : High (dropdown menu)
- WLAN Partition :
- WMM Enable :
- HT 20/40 Coexistence : Enable Disable

In this section, the following parameters can be configured:

Wireless Band: Displays the wireless band that can be configured.

Transmit Power: Select the wireless transmit power for the 5GHz band. Options to choose from are **High**, **Medium**, and **Low**.

WLAN Partition: Tick this option to enable the WLAN partition feature. This enables 802.11d operation. 802.11d is a wireless specification developed to allow the implementation of wireless networks in countries that cannot use the 802.11 standard. This feature should only be enabled if you are in a country that requires it.

WMM Enable: Display that the Wi-Fi Multimedia (WMM) feature is enabled. WMM is QoS for your wireless network. This will improve the quality of video and voice applications for your wireless clients.

The screenshot shows the 'ADVANCED WIRELESS SETTINGS' section for the 5GHz band. The settings are as follows:

- Wireless Band : 5GHz Band
- Transmit Power : High (dropdown menu)
- WLAN Partition :
- WMM Enable :

At the bottom of the settings area, there are two buttons: 'Save Settings' and 'Don't Save Settings'.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

Wi-Fi Protected Setup

To access the **Wi-Fi Protected Setup** page, click on the **Advanced** menu link, at the top, and then click on the **Wi-Fi Protected Setup** menu link, on the left.

On this page we can configure the Wi-Fi Protected Setup (WPS) settings on this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

WI-FI PROTECTED SETUP

Wi-Fi Protected Setup is used to easily add devices to a network using a PIN or button press. Devices must support Wi-Fi Protected Setup in order to be configured by this method.

If the PIN changes, the new PIN will be used in following Wi-Fi Protected Setup process. Clicking on "Don't Save Settings" button will not reset the PIN.

However, if the new PIN is not saved, it will get lost when the device reboots or loses power.

Save Settings Don't Save Settings

WI-FI PROTECTED SETUP

Enable :

WiFi Protected Setup : Enable/Configured

Lock WPS-PIN Setup :

PIN SETTINGS

PIN :

Reset PIN to Default Generate New PIN

ADD WIRELESS STATION

Connect your Wireless Device

Save Settings Don't Save Settings

Helpful Hints...

- **Enable** if other wireless devices you wish to include in the local network support Wi-Fi Protected Setup.
- Only "Admin" account can change security settings.
- **Lock WPS-PIN Setup** Locking the WPS-PIN Method prevents the settings from being changed by any new external registrar using its PIN. Devices can still be added to the wireless network using Wi-Fi Protected Setup Push Button Configuration (WPS-PIN).
- Click **Connect your Wireless Device** to use Wi-Fi Protected Setup to add wireless devices to the wireless network.
- [More...](#)

In this section, the following parameters can be configured:

Enable: Tick this option to enable the Wi-Fi Protected Setup (WPS) feature.

WiFi Protected Setup: Displays the status of the WPS feature.

Lock WPS-PIN Setup: Tick this option to lock the WPS-PIN setup.

WI-FI PROTECTED SETUP

Enable :


WiFi Protected Setup : Enable/Configured

Lock WPS-PIN Setup :

In this section, the WPS PIN will be displayed.

Click the **Reset PIN to Default** button to clear the PIN number used.

Click the **Generate New PIN** button to generate a new WPS PIN.

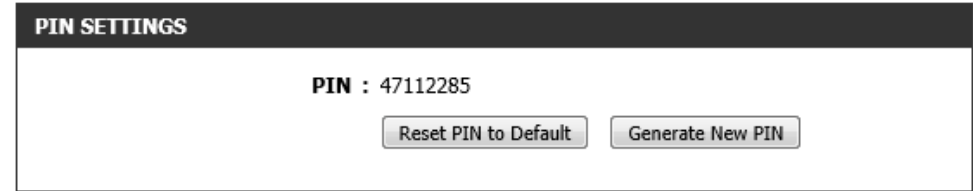

Click the **Connect your Wireless Device** button to initiate the Wi-Fi Protected Setup (WPS) setup wizard.



After clicking the **Connect your Wireless Device** button, the following page will be available.



Step 1: Select Configuration Method for Your Wireless Network

In this section, we can configure the following:

Auto: Select this option to automatically allow the router and the wireless client to connect to each other by means of WPS.

Manual: Select this option to display the configured wireless settings. This information can then be configured of the wireless clients manually to initiate a wireless connection.

Click the **Next** button to continue to the next step.

Click the **Cancel** button to discard the changes made and return to the main menu.

Step 2: Connect Your Wireless Device

After selecting the **Auto** option, in Step 1, the following page will be available. In this section, we can configure the following:

PIN: Select this option to use the Personal Identification Number (PIN) method to connect the two devices. Enter the PIN number here. Enter the same PIN number at the wireless client software.

PBC: Select this option to use the Push Button Configuration (PBC) method to connect the two devices.

Click the **Connect** button to initiate the WPS connection.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to discard the changes made and return to the main menu.

After selecting the **PIN** option, in Step 2, the following page will be available.

The router will allow 120 seconds for the WPS connection to initiate.

STEP 1: SELECT CONFIGURATION METHOD FOR YOUR WIRELESS NETWORK

Please select one of following configuration methods and click next to continue.

Auto Select this option if your wireless device supports WPS (Wi-Fi Protected Setup)

Manual Select this option will display the current wireless settings for you to configure the wireless device manually

STEP 2: CONNECT YOUR WIRELESS DEVICE

There are two ways to add wireless device to your wireless network:
 -PIN (Personal Identification Number)
 -PBC (Push Button Configuration)

PIN :

please enter the PIN from your wireless device and click the below "Connect" Button within 120 seconds

PBC

please press the push button on your wireless device and click the below "Connect" Button within 120 seconds

STEP 2: CONNECT YOUR WIRELESS DEVICE

Please start WPS on the wireless device you are adding to your wireless network.
 Remain time in second: 118

Adding wireless device: Started.

After selecting the **PBC** option, in Step 2, the following page will be available. Press the WPS button on the wireless client to initiate the connection.

The router will allow 120 seconds for the WPS connection to initiate.



After successfully connecting the router and the wireless client, by means of WPS, the following page will be available.

Click the **Cancel** button to finish the setup and return to the main menu.

Click the **Wireless Status** button to view information about wireless clients connected to the router.



After selecting the **Manual** option, in Step 1, the following page will be available.

This information can then be configured of the wireless clients manually to initiate a wireless connection.

Click the **Prev** button to return to the previous step.

Click the **Cancel** button to finish the setup and return to the main menu.

Click the **Wireless Status** button to view information about wireless clients connected to the router.

STEP 2: CONNECT YOUR WIRELESS DEVICE

Below is a detailed summary of your wireless security settings. Please print this page out, or write the information on a piece of paper, so you can configure the correct settings on your wireless client adapters.

2.4 Ghz Frequency

SSID: D-Link DSL-2890AL
Security Mode: Auto (WPA or WPA2) - Personal
Cipher Type: TKIP and AES
Pre-shared Key:
7d49df6566

5 Ghz Frequency

SSID: D-Link DSL-2890AL_5GHz
Security Mode: Auto (WPA or WPA2) - Personal
Cipher Type: TKIP and AES
Pre-shared Key:
7d49df6566

Advanced Network

To access the **Advanced Network** page, click on the **Advanced** menu link, at the top, and then click on the **Advanced Network** menu link, on the left.

On this page we can configure more advanced network settings on this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP **ADVANCED** MAINTENANCE STATUS HELP

ADVANCED NETWORK SETTINGS

These options are for users that wish to change the LAN settings. We do not recommend changing these settings from factory default. Changing these settings may affect the behavior of your network.

Save Settings Don't Save Settings

UPnP

Universal Plug and Play(UPnP) supports peer-to-peer Plug and Play functionality for network devices.

Enable UPnP IGD :

WAN PING

If you enable this feature, the WAN port of your router will respond to ping requests from the Internet that are sent to the WAN IP Address.

Enable WAN Ping Response :

IPV4 MULTICAST STREAMS

Enable IPv4 Multicast Streams :

IPV6 MULTICAST STREAMS

Enable IPv6 Multicast Streams :

Save Settings Don't Save Settings

Helpful Hints...

- UPnP helps other UPnP LAN hosts interoperate with the router. Leave the UPnP option enabled as long as the LAN has other UPnP applications.
- For added security, it is recommended that you disable the **WAN Ping Response** option. Ping is often used by malicious Internet users to locate active networks or PCs.
- The WAN speed is usually detected automatically. If you are having problems connecting to the WAN, try selecting the speed manually.
- If you are having trouble receiving video on demand type of service from the Internet, make sure the Multicast Stream option is enabled.
- [More...](#)

In this section, the following parameters can be configured:

Enable UPnP IGD: Tick this option to enable the UPnP Internet Gateway Device (IGD) feature.

UPnP

Universal Plug and Play(UPnP) supports peer-to-peer Plug and Play functionality for network devices.

Enable UPnP IGD :

In this section, the following parameters can be configured:

Enable WAN Ping Response: Tick this option to enable the ping feature to get a response from the WAN port.

WAN PING

If you enable this feature, the WAN port of your router will respond to ping requests from the Internet that are sent to the WAN IP Address.

Enable WAN Ping Response :

In this section, the following parameters can be configured:

Enable IPv4 Multicast Streams: Tick this option to enable the IPv4 multicast streams feature. This feature will allow multicast traffic to pass through the router from the Internet (IPv4).

IPv4 MULTICAST STREAMS

Enable IPv4 Multicast Streams :

In this section, the following parameters can be configured:

Enable IPv6 Multicast Streams: Tick this option to enable the IPv6 multicast streams feature. This feature will allow multicast traffic to pass through the router from the Internet (IPv6).

IPv6 MULTICAST STREAMS

Enable IPv6 Multicast Streams :

Guest Wi-Fi

To access the **Guest Wi-Fi** page, click on the **Advanced** menu link, at the top, and then click on the **Guest Wi-Fi** menu link, on the left.

On this page we can configure the guest Wi-Fi settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link web user interface for configuring Guest Wi-Fi settings. The interface is divided into several sections:

- Header:** D-Link logo and navigation tabs: SETUP, ADVANCED (selected), MAINTENANCE, STATUS, HELP.
- Left Sidebar:** A list of configuration options including VIRTUAL SERVER, PORT FORWARDING, PORT TRIGGERING, QOS ENGINE, NETWORK FILTER, ACCESS CONTROL, WEBSITE FILTER, INBOUND FILTER, FIREWALL SETTINGS, ROUTING, ADVANCED WIRELESS, WI-FI PROTECTED SETUP, ADVANCED NETWORK, GUEST WI-FI (selected), IPV6 FIREWALL, and IPV6 ROUTING.
- Main Content Area:**
 - GUEST WI-FI:** A section with a title bar and a description: "Use this section to configure the GUEST Wi-Fi settings of your router. The GUEST Wi-Fi provide a separate network zone for guest to access Internet." Below this are "Save Settings" and "Don't Save Settings" buttons.
 - GUEST WI-FI:** A section with the option "Enable Routing Between Zones :
 - SESSION 2.4GHZ:**
 - Enable GUEST Wi-Fi : Always
 - Wireless Band : **2.4GHz Band**
 - Wireless Network Name : (Also called the SSID)
 - Security Mode :
 - SESSION 5GHZ:**
 - Enable GUEST Wi-Fi : Always
 - Wireless Band : **5GHz Band**
 - Wireless Network Name : (Also called the SSID)
 - Security Mode :
 - At the bottom of the main content area are "Save Settings" and "Don't Save Settings" buttons.
- Right Sidebar:** A "Helpful Hints..." section with a bullet point: "Use this section to configure the guest zone settings of your router. The guest zone provide a separate network zone for guests to access Internet." and a "More..." link.

In this section, the following parameters can be configured:

Enable Routing Between Zones: Tick this option to enable routing between wireless zones.

This is a close-up screenshot of the "GUEST WI-FI" section, specifically the "Enable Routing Between Zones" option. It shows a checkbox that is currently unchecked, with the text "Enable Routing Between Zones :

In this section, the following parameters can be configured:

Enable GUEST Wi-Fi: Tick this option to enable the guest Wi-Fi features on the 2.4GHz wireless band. Select a time schedule from the drop-down menu to apply to this feature.

Wireless Band: Displays the wireless band being configured.

Wireless Network Name: Enter the guest wireless network name here.

Security Mode: Select the wireless security mode that will be used for this guest wireless service. Options to choose from are **None**, **WEP**, **WPA-Personal**, and **WPA-Enterprise**.

After selecting **WEP** as the wireless security mode, the following page will be available. The following parameters can be configured:

Authentication: Select the WEP authentication option here. Options to choose from are **Both** and **Shared Key**.

WEP Encryption: Select the WEP Key Length value used here. Options to choose from are **128 bit (26 hex digits)** and **64 bit (10 hex digits)**.

Default WEP Key: Select the default WEP key here.

WEP Key: Enter a wireless security key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

SESSION 2.4GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 2.4GHz Band

Wireless Network Name : D-Link DSL-2890AL_GUE (Also called the SSID)

Security Mode : None

SESSION 2.4GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 2.4GHz Band

Wireless Network Name : D-Link DSL-2890AL_GUE (Also called the SSID)

Security Mode : WEP

WEP

WEP is the wireless encryption standard. To use it you must enter the same key(s) into the router and the wireless stations. For 64-bit keys you must enter 10 hex digits into each key box. For 128-bit keys you must enter 26 hex digits into each key box. A hex digit is either a number from 0 to 9 or a letter from A to F. For the most secure use of WEP set the authentication type to "Shared Key" when WEP is enabled.

You may also enter any text string into a WEP key box, in which case it will be converted into a hexadecimal key using the ASCII values of the characters. A maximum of 5 text characters can be entered for 64-bit keys, and a maximum of 13 characters for 128-bit keys.

Authentication : Both

WEP Encryption : 64 bit (10 hex digits)

Default WEP Key : WEP Key 1

WEP Key :

After selecting **WPA-Personal** as the wireless security mode, the following page will be available. The following parameters can be configured:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. Options to choose from are **TKIP and AES**, **TKIP**, and **AES**.

Group Key Update Interval: Enter the group key update interval value here.

Pre-Shared Key: Enter the WPA-Personal wireless Pre-Shared Key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

SESSION 2.4GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 2.4GHz Band

Wireless Network Name : D-Link DSL-2890AL_GUE (Also called the SSID)

Security Mode : WPA-Personal

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode : Auto(WPA or WPA2)

Cipher Type : TKIP and AES

Group Key Update Interval : 3600 (seconds)

PRE-SHARED KEY

Enter an 8- to 63-character alphanumeric pass-phrase. For good security it should be of ample length and should not be a commonly known phrase.

Pre-Shared Key :

After selecting **WPA-Personal** as the wireless security mode, the following page will be available. The following parameters can be configured:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. Options to choose from are **TKIP and AES**, **TKIP**, and **AES**.

Group Key Update Interval: Enter the group key update interval value here.

RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

RADIUS server Port: Enter the external RADIUS server port number used here.

RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here.
This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Click the **Advanced** button to configure settings for an optional secondary RADIUS server.

SESSION 2.4GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 2.4GHz Band

Wireless Network Name : D-Link DSL-2890AL_GUE (Also called the SSID)

Security Mode : WPA-Enterprise

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode : Auto(WPA or WPA2)

Cipher Type : TKIP and AES

Group Key Update Interval : 3600 (seconds)

EAP (802.1X)

When WPA enterprise is enabled, the router uses EAP (802.1x) to authenticate clients via a remote RADIUS server.

RADIUS server IP Address :

RADIUS server Port : 1812

RADIUS server Shared Secret :

After clicking the **Advanced** button, the following parameters are available for configuration:

Second RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

Second RADIUS server Port: Enter the external RADIUS server port number used here.

Second RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Optional backup RADIUS server

Second RADIUS server IP Address :

Second RADIUS server Port :

Second RADIUS server Shared Secret :

In this section, the following parameters can be configured:

Enable GUEST Wi-Fi: Tick this option to enable the guest Wi-Fi features on the 5GHz wireless band. Select a time schedule from the drop-down menu to apply to this feature.

Wireless Band: Displays the wireless band being configured.

Wireless Network Name: Enter the guest wireless network name here.

Security Mode: Select the wireless security mode that will be used for this guest wireless service. Options to choose from are **None**, **WEP**, **WPA-Personal**, and **WPA-Enterprise**.

SESSION 5GHZ

Enable GUEST Wi-Fi :

Wireless Band : 5GHz Band

Wireless Network Name : (Also called the SSID)

Security Mode :

After selecting **WEP** as the wireless security mode, the following page will be available. The following parameters can be configured:

Authentication: Select the WEP authentication option here. Options to choose from are **Both** and **Shared Key**.

WEP Encryption: Select the WEP Key Length value used here. Options to choose from are **128 bit (26 hex digits)** and **64 bit (10 hex digits)**.

Default WEP Key: Select the default WEP key here.

WEP Key: Enter a wireless security key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

SESSION 5GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 5GHz Band

Wireless Network Name : D-Link DSL-2890AL_5GHz (Also called the SSID)

Security Mode : WEP

WEP

WEP is the wireless encryption standard. To use it you must enter the same key(s) into the router and the wireless stations. For 64-bit keys you must enter 10 hex digits into each key box. For 128-bit keys you must enter 26 hex digits into each key box. A hex digit is either a number from 0 to 9 or a letter from A to F. For the most secure use of WEP set the authentication type to "Shared Key" when WEP is enabled.

You may also enter any text string into a WEP key box, in which case it will be converted into a hexadecimal key using the ASCII values of the characters. A maximum of 5 text characters can be entered for 64-bit keys, and a maximum of 13 characters for 128-bit keys.

Authentication : Both

WEP Encryption : 64Bit

Default WEP Key : WEP Key 1

WEP Key :

After selecting **WPA-Personal** as the wireless security mode, the following page will be available. The following parameters can be configured:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. Options to choose from are **TKIP and AES**, **TKIP**, and **AES**.

Group Key Update Interval: Enter the group key update interval value here.

Pre-Shared Key: Enter the WPA-Personal wireless Pre-Shared Key here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

SESSION 5GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 5GHz Band

Wireless Network Name : D-Link DSL-2890AL_5GHz (Also called the SSID)

Security Mode : WPA-Personal

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode : Auto(WPA or WPA2)

Cipher Type : TKIP and AES

Group Key Update Interval : 3600 (seconds)

PRE-SHARED KEY

Enter an 8- to 63-character alphanumeric pass-phrase. For good security it should be of ample length and should not be a commonly known phrase.

Pre-Shared Key :

After selecting **WPA-Personal** as the wireless security mode, the following page will be available. The following parameters can be configured:

WPA Mode: Here we can select which WPA mode to use. Options to choose from are **Auto (WPA or WPA2)**, **WPA2 Only**, and **WPA Only**.

Cipher Type: Select the wireless cipher type here. Options to choose from are **TKIP and AES**, **TKIP**, and **AES**.

Group Key Update Interval: Enter the group key update interval value here.

RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

RADIUS server Port: Enter the external RADIUS server port number used here.

RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here.
This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Click the **Advanced** button to configure settings for an optional secondary RADIUS server.

SESSION 5GHZ

Enable GUEST Wi-Fi : Always

Wireless Band : 5GHz Band

Wireless Network Name : D-Link DSL-2890AL_5GHz (Also called the SSID)

Security Mode : WPA-Enterprise

WPA

Use **WPA** or **WPA2** mode to achieve a balance of strong security and best compatibility. This mode uses WPA for legacy clients while maintaining higher security with stations that are WPA2 capable. Also the strongest cipher that the client supports will be used. For best security, use **WPA2 Only** mode. This mode uses AES(CCMP) cipher and legacy stations are not allowed access with WPA security. For maximum compatibility, use **WPA Only**. This mode uses TKIP cipher. Some gaming and legacy devices work only in this mode.

To achieve better wireless performance use **WPA2 Only** security mode (or in other words AES cipher).

WPA Mode : Auto(WPA or WPA2)

Cipher Type : TKIP and AES

Group Key Update Interval : 3600 (seconds)

EAP (802.1X)

When WPA enterprise is enabled, the router uses EAP (802.1x) to authenticate clients via a remote RADIUS server.

RADIUS server IP Address :

RADIUS server Port : 1812

RADIUS server Shared Secret :

After clicking the **Advanced** button, the following parameters are available for configuration:

Second RADIUS server IP Address: Enter the IP address of the external RADIUS server used here.

Second RADIUS server Port: Enter the external RADIUS server port number used here.

Second RADIUS server Shared Secret: Enter the RADIUS server Shared Secret here. This key must be configured on all the wireless clients for them to be able to connect to your wireless network.

Optional backup RADIUS server

Second RADIUS server IP :
Address

Second RADIUS server Port :

Second RADIUS server Shared :
Secret

IPv6 Firewall

To access the **IPv6 Firewall** page, click on the **Advanced** menu link, at the top, and then click on the **IPv6 Firewall** menu link, on the left.

On this page we can configure the IPv6 firewall rules used by this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot displays the D-Link web interface for IPv6 Firewall configuration. The top navigation bar includes 'DSL-2890AL //', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various configuration options, with 'IPv6 FIREWALL' selected. The main content area is titled 'IPv6 FIREWALL' and contains the following sections:

- IPv6 FIREWALL:** A text box explaining the feature and two buttons: 'Save Settings' and 'Don't Save Settings'.
- IPv6 SIMPLE SECURITY:** A section with the heading 'Enable IPv6 Simple Security : .
- 20 -- IPv6 FIREWALL RULES:** A section showing 'Remaining number of rules that can be created: 20' and a 'Configure IPv6 Filtering below:' dropdown menu set to 'Turn IPv6 Filtering OFF'. Below this is a table for creating rules:

Name	Schedule	IP Address Range	Protocol
<input type="text"/>	Always <input type="text"/>	<input type="text"/>	ALL <input type="text"/>
Source	Interface <input type="text"/>	<input type="text"/>	<input type="text"/>
Dest	Interface <input type="text"/>	<input type="text"/>	Port Range <input type="text"/> ~ <input type="text"/>

On the right side, there is a 'Helpful Hints...' sidebar with the following text:

- For each rule you can create a name and control the direction of traffic. You can also allow or deny a range of IP Addresses, the protocol and a port range.
- In order to apply a schedule to a Firewall rule, you must first define a schedule on the [Tools -> Schedules](#) page.
- [More...](#)

In this section, the following parameters can be configured:

Enable IPv6 Simple Security: Tick this option to enable the IPv6 simple security feature.

 checkbox."/>

This is a close-up of the 'IPv6 SIMPLE SECURITY' section from the screenshot above. It shows the heading 'IPv6 SIMPLE SECURITY' and the checkbox 'Enable IPv6 Simple Security : .

In this section, the following parameters can be configured:

Configure IPv6 Filtering below: select the IPv6 filtering method here. Select the **Turn IPv6 Filtering OFF** option, to disable this feature. Select the **Turn IPv6 Filtering ON and ALLOW rules listed** option, to enable the IPv6 filtering feature and allow the rules listed. Select the **Turn IPv6 Filtering ON and DENY rules listed** option, to enable the IPv6 filtering feature and deny the rules listed.

Checkbox: Tick this option to enable the selected rule.

Name: Enter the name of the IPv6 filtering rule here.

Schedule: Select the time schedule that will be applied to this rule here.

Source: Select the source interface associated with this rule.

Dest: Select the destination interface associated with this rule.

IP Address Range: Enter the starting and ending IP addresses, used for this rule, here.

Protocol: Select the protocol associated with this rule here. Options to choose from are **TCP**, **UDP**, and **ICMP**.

Port Range: Enter the starting and ending port numbers, used for this rule here.

20 -- IPV6 FIREWALL RULES

Remaining number of rules that can be created: 20

Configure IPv6 Filtering below:

	Name	Schedule	
	<input type="text"/>	Always ▾	
<input type="checkbox"/>	Source	Interface	IP Address Range
	<input type="text"/>	▾	<input type="text"/>
			Protocol
			ALL ▾
	Dest	Interface	IP Address Range
	<input type="text"/>	▾	<input type="text"/>
			Port Range
			<input type="text"/> ~ <input type="text"/>

IPv6 Routing

To access the **IPv6 Routing** page, click on the **Advanced** menu link, at the top, and then click on the **IPv6 Routing** menu link, on the left.

On this page we can configure the IPv6 routing rules used by the router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

ROUTING

This Routing page allows you to specify custom routes that determine how data is moved around your network.

Save Settings Don't Save Settings

10 -- ROUTE LIST

Name	Destination IPv6 / Prefix Length	Metric	Interface	Gateway
<input type="checkbox"/>	64		NULL	
<input type="checkbox"/>	64		NULL	
<input type="checkbox"/>	64		NULL	

Helpful Hints...

- Each route has a check box next to it, check this box if you want the route to be enabled.
- The name field allows you to specify a name for identification of this route, e.g. 'Network 2'
- The destination IPv6 address is the address of the host or network you wish to reach.
- The prefix length field identifies the portion of the destination IP in use.
- The gateway IP address is the IP address of the router, if any, used to reach the specified destination.
- [More...](#)

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the specified route.

Name: Enter the name of the route here.

Metric: Enter the metric value for this route here.

Interface: Select the interface, associated with this route, here.

Destination IPv6 / Prefix Length: Enter the destination IPv6 address and prefix length value for the route here.

Gateway: Enter the gateway IPv6 address for the route here.

10 -- ROUTE LIST

Name	Destination IPv6 / Prefix Length	Metric	Interface	Gateway
<input type="checkbox"/>	64		NULL	

Maintenance Category

The **Maintenance** category is designed to assist the user with maintenance configurations for this product.

The following pages can be found in the **Maintenance** category:

- **Admin** - On this page we can configure the administrator settings of this router.
- **Time** - On this page we can configure the time and date settings for this router.
- **Email Settings** - On this page we can configure the email settings for this router.
- **System** - On this page we can configure the system settings of this router.
- **Firmware** - On this page we can view and initiate a firmware update for this router.
- **Dynamic DNS** - On this page we can configure the Dynamic DNS settings for this router.
- **Diagnostics** - On this page we can initiate and view connection diagnostics for this router.
- **Schedules** - On this page we can configure time and date schedules used by this router.

The screenshot displays the D-Link web user interface for a DSL-2890AL router. The top navigation bar includes the D-Link logo and tabs for SETUP, ADVANCED, MAINTENANCE (selected), STATUS, and HELP. The left sidebar lists various configuration categories: ADMIN, TIME, SYSLOG, EMAIL SETTINGS, SYSTEM, FIRMWARE, DYNAMIC DNS, DIAGNOSTICS, SCHEDULES, and LOGOUT.

The main content area is titled "ADMINISTRATOR SETTINGS" and contains the following sections:

- ADMINISTRATOR SETTINGS:** A warning message states: "The 'admin' account can access the management interface. The admin has read/write access and can change password. By default there is no password configured. It is highly recommended that you create a password to keep your router secure." Below this are "Save Settings" and "Don't Save Settings" buttons.
- ADMIN PASSWORD:** A prompt asks the user to "Please enter the same password into both boxes, for confirmation." It includes fields for "Password" and "Verify Password", both currently showing four asterisks.
- SYSTEM NAME:** A field for "Gateway Name" is set to "DSL-2890AL".
- ADMINISTRATION:** This section contains several checkboxes and input fields:
 - Enable Graphical Authentication:
 - Enable HTTPS Server:
 - Enable Remote Management:
 - Remote Admin Port: 8080 (with "Use HTTPS" checkbox)
 - Remote Admin Inbound Filter: Allow All (dropdown menu)
 - Details: Allow All (input field)
- SSH MANAGEMENT:** This section contains:
 - SSH Local Management:
 - SSH Remote Management:
 - SSH Remote Port: 2222 (input field)
 - SSH Remote Inbound Filter: Allow All (dropdown menu)
 - Details: Allow All (input field)

The right sidebar, titled "Helpful Hints...", provides additional guidance:

- For security reasons, it is recommended that you rechange the password for the Admin account. Be sure to write down the new password to avoid having to reset the router in case they are forgotten.
- When enabling Remote Management, you can specify the IP address of the computer on the Internet that you want to have access to your router, or leave it blank to allow access to any computer on the Internet.
- Select a filter that controls access as needed for this admin port. If you do not see the filter you need in the list of filters, go to the **Advanced -> Inbound Filter** screen and create a new filter.
- [More...](#)

Admin

To access the **Admin** page, click on the **Maintenance** menu link, at the top, and then click on the **Admin** menu link, on the left.

On this page we can configure the administrator settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot displays the D-Link web user interface for the DSL-2890AL router. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. A left sidebar lists various configuration categories, with ADMIN selected. The main content area is titled 'ADMINISTRATOR SETTINGS' and contains the following sections:

- ADMINISTRATOR SETTINGS:** A text block explaining that the 'admin' account has read/write access and can change the password. It notes that by default there is no password, but it is highly recommended to create one for security. Below this text are two buttons: 'Save Settings' and 'Don't Save Settings'.
- ADMIN PASSWORD:** A section with the instruction 'Please enter the same password into both boxes, for confirmation.' It features two password input fields labeled 'Password' and 'Verify Password', both containing six dots.
- SYSTEM NAME:** A section with a 'Gateway Name' input field containing the text 'DSL-2890AL'.
- ADMINISTRATION:** A section with several configuration options:
 - 'Enable Graphical Authentication' with an unchecked checkbox.
 - 'Enable HTTPS Server' with a checked checkbox.
 - 'Enable Remote Management' with an unchecked checkbox.
 - 'Remote Admin Port' set to '8080' and 'Use HTTPS' with an unchecked checkbox.
 - 'Remote Admin Inbound Filter' set to 'Allow All' via a dropdown menu.
 - 'Details' set to 'Allow All' via an input field.
- SSH MANAGEMENT:** A section with several configuration options:
 - 'SSH Local Management' with an unchecked checkbox.
 - 'SSH Remote Management' with an unchecked checkbox.
 - 'SSH Remote Port' set to '2222'.
 - 'SSH Remote Inbound Filter' set to 'Allow All' via a dropdown menu.
 - 'Details' set to 'Allow All' via an input field.

On the right side of the interface, there is a 'Helpful Hints...' section with the following advice:

- For security reasons, it is recommended that you change the password for the Admin account. Be sure to write down the new password to avoid having to reset the router in case they are forgotten.
- When enabling Remote Management, you can specify the IP address of the computer on the Internet that you want to have access to your router, or leave it blank to allow access to any computer on the Internet.
- Select a filter that controls access as needed for this admin port. If you do not see the filter you need in the list of filters, go to the **Advanced -> Inbound Filter** screen and create a new filter.
- [More...](#)

In this section, the following parameters can be configured:

Password: Enter the new Web UI login password here.

Verify Password: Enter the new Web UI login password here again to verify.

ADMIN PASSWORD

Please enter the same password into both boxes, for confirmation.

Password :

Verify Password :

In this section, the following parameters can be configured:

Gateway Name: Enter the name for this router here.

SYSTEM NAME	
Gateway Name :	<input type="text" value="DSL2890AL"/>

In this section, the following parameters can be configured:

Enable Graphical Authentication: Tick this option to enable the graphical authentication feature here. This feature enables a challenge-response test to require users to type letters or numbers from a distorted image displayed on the screen to prevent online hackers and unauthorized users from gaining access to your router's network settings.

Enable HTTPS Server: Tick this option to enable the HTTPS server feature. This feature enables HTTPS to connect to the router securely.

Enable Remote Management: Tick this option to enable the remote management feature. Remote management allows the router to be configured from the Internet by a web browser. A username/password is still required to access the Web UI interface.

Remote Admin Port: Enter the remote administration port number here. Tick this **Use HTTPS** option to use secure HTTP.

Remote Admin Inbound Filter: Select the remote administration inbound filter method here. Options to choose from are **Allow All**, **Deny All**, and **Block**.

Details: Displays the descriptive details of the remote administration inbound filter rule created and applied.

ADMINISTRATION	
Enable Graphical Authentication :	<input type="checkbox"/>
Enable HTTPS Server :	<input checked="" type="checkbox"/>
Enable Remote Management :	<input type="checkbox"/>
Remote Admin Port :	<input type="text" value="8080"/> Use HTTPS: <input type="checkbox"/>
Remote Admin Inbound Filter :	<input type="text" value="Allow All"/>
Details :	<input type="text" value="Allow All"/>

In this section, the following parameters can be configured:

SSH Local Management: Select this option to enable SSH local management to this router.

SSH Remote Management: Select this option to enable SSH remote management to this router.

SSH Remote Port: After enabling SSH remote management, enter the SSH remote port number used here.

SSH Remote Inbound Filter: Select the SSH remote inbound filter method here. Options to choose from are **Allow All** and **Deny All**.

Details: Displays the descriptive details of the SSH remote inbound filter rule created and applied.

SSH MANAGEMENT	
SSH Local Management :	<input type="checkbox"/>
SSH Remote Management :	<input type="checkbox"/>
SSH Remote Port :	<input type="text" value="2222"/>
SSH Remote Inbound Filter :	<input type="text" value="Allow All"/>
Details :	<input type="text" value="Allow All"/>

In this section, the following parameters can be configured:

Telnet Local Management: Select this option to enable Telnet local management to this router.

Telnet Remote Management: Select this option to enable Telnet remote management to this router.

Telnet Remote Port: After enabling Telnet remote management, enter the Telnet remote port number used here.

Telnet Remote Inbound Filter: Select the Telnet remote inbound filter method here. Options to choose from are **Allow All** and **Deny All**.

Details: Displays the descriptive details of the Telnet remote inbound filter rule created and applied.

TELNET MANAGEMENT

Telnet Local Management :

Telnet Remote Management :

Telnet Remote Port :

Telnet Remote **Inbound Filter** :

Details :

In this section, the following parameters can be configured:

TFTP Local Management: Select this option to enable TFTP local management to this router.

TFTP Remote Management: Select this option to enable TFTP remote management to this router.

TFTP Remote Port: After enabling TFTP remote management, enter the TFTP remote port number used here.

TFTP Remote Inbound Filter: Select the TFTP remote inbound filter method here. Options to choose from are **Allow All** and **Deny All**.

Details: Displays the descriptive details of the TFTP remote inbound filter rule created and applied.

TFTP MANAGEMENT

TFTP Local Management :

TFTP Remote Management :

TFTP Remote Port :

TFTP Remote **Inbound Filter** :

Details :

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

Time

To access the **Time** page, click on the **Maintenance** menu link, at the top, and then click on the **Time** menu link, on the left.

On this page we can configure the time and date settings for this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot displays the D-Link web interface for a DSL-2890AL modem router. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar lists various configuration categories, with TIME selected. The main content area is titled 'TIME AND DATE' and contains the following elements:

- TIME AND DATE**: A section with a description: "The Time and Date Configuration option allows you to configure, update, and maintain the correct time on the internal system clock. From this section you can set the time zone you are in and set the NTP (Network Time Protocol) Server. Daylight Saving can also be configured to adjust the time when needed." Below this are 'Save Settings' and 'Don't Save Settings' buttons.
- TIME AND DATE CONFIGURATION**: A section with the following settings:
 - Time**: 2000/01/01 00:29:12
 - Time Zone**: (GMT+10:00) Canberra, Melbourne, Sydney
 - Enable Daylight Saving**:
 - Daylight Saving Offset**: +01:00
 - Daylight Saving Dates**: A table with columns for Month, Week, Day of Week, and Time.

	Month	Week	Day of Week	Time
DST Start	Jan	1st	Sun	12:00 AM
DST End	Jan	1st	Sun	12:00 AM
- AUTOMATIC TIME AND DATE CONFIGURATION**: A section with the following settings:
 - Automatically synchronize with D-Link's Internet time server
 - NTP Server Used**: ntp1.dlink.com
 - Update Now** button
 - Status: Synchronizing ...

On the right side, there is a 'Helpful Hints...' section with a bullet point: "Either enter the time manually by clicking the **Sync. Your Computers Time Settings** button, or use the **Automatic Time Configuration** option to have your router synchronize with a time server on the Internet." Below this is a 'More...' link.

In this section, the following parameters can be configured:

Time: Displays the current time configured on this router.

Time Zone: Select the time zone here.

Enable Daylight Saving: Tick this option to enable daylight saving.

Daylight Saving Offset: Select the daylight saving offset here.

Daylight Saving Dates: Select the daylight saving starting and ending month, week, day of the week and time here.

TIME AND DATE CONFIGURATION

Time : 2000/01/01 00:29:31

Time Zone : (GMT+10:00) Canberra, Melbourne, Sydney ▼

Enable Daylight Saving :

Daylight Saving Offset : +01:00 ▼

Daylight Saving Dates :

	Month	Week	Day of Week	Time
DST Start	Jan ▼	1st ▼	Sun ▼	12:00 AM ▼
DST End	Jan ▼	1st ▼	Sun ▼	12:00 AM ▼

In this section, the following parameters can be configured:

Checkbox: Tick this option to enable the automatic time synchronization feature.
This router will synchronize the time and date with one of D-Link's time servers.

NTP Server Used: Select the D-Link time server here.

AUTOMATIC TIME AND DATE CONFIGURATION

Automatically synchronize with D-Link's Internet time server

NTP Server Used : ntp1.dlink.com ▼ Update Now

Click the **Update Now** button to manually initiate a time and date update to this router.

In this section we can manually configure the time and date for this router. Manually select the **Year**, **Month**, **Day**, **Hour**, **Minute**, and **Second** options.

Click the **Sync. your computer's time settings** button to automatically select and use the management computer's time and date settings on this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

SET THE TIME AND DATE MANUALLY

Year	2013 ▼	Month	Mar ▼	Day	8 ▼
Hour	16 ▼	Minute	37 ▼	Second	37 ▼

Sync. your computer's time settings

Save Settings
Don't Save Settings

Email Settings

To access the **Email Settings** page, click on the **Maintenance** menu link, at the top, and then click on the **Email Settings** menu link, on the left.

On this page we can configure the email settings for this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link DSL-2890AL Web User Interface. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar contains a menu with options: ADMIN, TIME, SYSLOG, EMAIL SETTINGS (highlighted), SYSTEM, FIRMWARE, DYNAMIC DNS, DIAGNOSTICS, and SCHEDULES. The main content area is titled 'EMAIL SETTINGS' and contains the following sections:

- EMAIL SETTINGS**: A message stating 'The Email feature can be used to send the system log files and router alert messages to your email address.' Below this are two buttons: 'Save Settings' and 'Don't Save Settings'.
- EMAIL NOTIFICATION**: A section with the label 'Enable Email Notification :
- EMAIL SETTINGS**: A section with the following fields:
 - From Email Address :
 - To Email Address :
 - Email Subject :
 - SMTP Server Address :
 - SMTP Server Port :
 - Enable Authentication :
 - Account Name :
 - Password :
 - Verify Password :
- EMAIL LOG WHEN FULL OR ON SCHEDULE**: A section with a 'Send Mail Now' button.

On the right side, there is a 'Helpful Hints...' section with a bullet point: '• You may want to make the email settings similar to those of your email client program.' and a link for '• More...'

In this section, the following parameters can be configured:

Enable Email Notification: Tick this option to enable the email notification feature.

The close-up screenshot shows the 'EMAIL NOTIFICATION' section with the label 'Enable Email Notification :

In this section, the following parameters can be configured:

- From Email Address:** Enter the sender's email address here.
- To Email Address:** Enter the recipient's email address here.
- Email Subject:** Enter the email's subject information here.
- SMTP Server Address:** Enter the SMTP server's IP address here.
- SMTP Server Port:** Displays the SMTP server's port number that will be used.
- Enable Authentication:** Tick this option to enable SMTP authentication.
- Account Name:** Enter the email account username here.
- Password:** Enter the email account password here.
- Verify Password:** Enter the email account password here again.

Click the **Send Mail Now** button to send out a test email to test the email settings configured.

EMAIL SETTINGS

From Email Address :	<input type="text"/>
To Email Address :	<input type="text"/>
Email Subject :	<input type="text"/>
SMTP Server Address :	<input type="text"/>
SMTP Server Port :	<input type="text" value="25"/>
Enable Authentication :	<input type="checkbox"/>
Account Name :	<input type="text"/>
Password :	<input type="text"/>
Verify Password :	<input type="text"/>

In this section, the following parameters can be configured:

- On Log Full:** Tick this option to send out an email when the log space is close to depletion.
- On Schedule:** Tick this option to send out an email based on the schedule selected.
- Schedule:** Select the schedule that will be used to send periodic informational emails.
- Details:** Displays the schedule detail information.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

EMAIL LOG WHEN FULL OR ON SCHEDULE

On Log Full :	<input type="checkbox"/>
On Schedule :	<input type="checkbox"/>
Schedule :	<input type="text" value="Never"/>
Detail :	<input type="text"/>

System

To access the **System** page, click on the **Maintenance** menu link, at the top, and then click on the **System** menu link, on the left.

On this page we can configure the system settings of this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link web interface for the DSL-2890AL. The top navigation bar includes 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various configuration categories, with 'SYSTEM' highlighted. The main content area is titled 'SAVE AND RESTORE SETTINGS' and contains the following options:

- Save Settings To Local Hard Drive :** Save Configuration
- Load Settings From Local Hard Drive :** [Browse...] Restore Configuration From File
- Restore To Factory Default Settings :** Restore Factory Defaults
- Reboot The Device :** Reboot the Device

On the right side, there is a 'Helpful Hints...' section with the following text:

• Once your router is configured the way you want it, you can save these settings to a configuration file that can later be loaded in the event that the router's default settings are restored. To do this, click the Save button next to where it says Save Settings to Local Hard Drive.

• More...

In this section, the following parameters can be configured:

Save Settings To Local Hard Drive: Click the **Save Configuration** button to download the router's settings to the management computers.

Load Settings From Local Hard Drive: Click the **Browse** button to navigate to the saved configuration file, on the management computer, and click the **Restore Configuration From File** button to restore the router's configuration to the settings configured on the configuration file.

Restore To Factory Default Settings: Click the **Restore Factory Defaults** button to remove all the settings configured on this router and return the settings to the factory defaults.

Reboot The Device: Click the **Reboot the Device** button to reboot the router. All unsaved configurations will be discarded.

This close-up screenshot shows the 'SAVE AND RESTORE SETTINGS' section. The options are:

- Save Settings To Local Hard Drive :** Save Configuration
- Load Settings From Local Hard Drive :** [Browse...] Restore Configuration From File
- Restore To Factory Default Settings :** Restore Factory Defaults
- Reboot The Device :** Reboot the Device

Firmware

To access the **Firmware** page, click on the **Maintenance** menu link, at the top, and then click on the **Firmware** menu link, on the left.

On this page we can view and initiate a firmware update for this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

FIRMWARE UPDATE

There may be new firmware for your router to improve functionality and performance. [Click here to check for an upgrade on our support site.](#)

To upgrade the firmware, locate the upgrade file on the local hard drive with the Browse button. Once you have found the file to be used, click the Upload button to start the firmware upgrade.

FIRMWARE INFORMATION

Current Firmware Version : AU_1.02.04
 Current Firmware Time : 01/21/2014 14:54:00
 Check Online Now for Latest : Firmware Version

FIRMWARE UPGRADE

Note: Some firmware upgrades reset the configuration options to the factory defaults. Before performing an upgrade, be sure to save the current configuration.

To upgrade the firmware, your PC must have a wired connection to the router. Enter the name of the firmware upgrade file, and click on the Upload button.

Upload :

Helpful Hints...

- Firmware Update are released periodically to improve the functionality of your router and also to add features. If you run into a problem with a specific feature of the router, check our support site by clicking on the **Check Now** and see if an updated version of firmware is available for your router.
- [More...](#)

In this section, the firmware version, of this router, will be displayed.

Click the **Check Now** button to check online whether there is a new firmware version available for this product.

FIRMWARE INFORMATION

Current Firmware Version : AU_1.02.04
 Current Firmware Time : 01/21/2014 14:54:00
 Check Online Now for Latest : Firmware Version

In this section, the following parameters can be configured:

Upload: Click the **Browse** button to navigate to the new firmware file, located on the management computers, and click the **Upload** button to initiate the firmware upgrade procedure. All settings will be removed and this product will return to the factory default settings.

FIRMWARE UPGRADE

Note: Some firmware upgrades reset the configuration options to the factory defaults. Before performing an upgrade, be sure to save the current configuration.

To upgrade the firmware, your PC must have a wired connection to the router. Enter the name of the firmware upgrade file, and click on the Upload button.

Upload :

Dynamic DNS

To access the **Dynamic DNS** page, click on the **Maintenance** menu link, at the top, and then click on the **Dynamic DNS** menu link, on the left.

On this page we can configure the Dynamic DNS settings for this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link web interface for the DSL-2890AL modem router. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE (selected), STATUS, and HELP. A left sidebar lists various configuration categories, with DYNAMIC DNS selected. The main content area is titled 'DYNAMIC DNS' and contains an introductory paragraph, a link to 'Sign up for D-Link's Free DDNS service at www.DLinkDDNS.com', and two buttons: 'Save Settings' and 'Don't Save Settings'. Below this is the 'DYNAMIC DNS SETTINGS' section, which includes a checkbox for 'Enable Dynamic DNS', a dropdown for 'Server Address', and input fields for 'Host Name', 'Username or Key', 'Password or Key', and 'Verify Password or Key'. The 'Timeout' is set to 567 hours, and the 'Status' is 'Disconnected'. At the bottom, there is a section for 'DYNAMIC DNS FOR IPV6 HOSTS' with an 'Enable' checkbox.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

ADMIN
TIME
SYSLOG
EMAIL SETTINGS
SYSTEM
FIRMWARE
DYNAMIC DNS
DIAGNOSTICS
SCHEDULES

DYNAMIC DNS

The Dynamic DNS feature allows you to host a server (Web, FTP, Game Server, etc...) using a domain name that you have purchased (www.whateveryournameis.com) with your dynamically assigned IP address. Most broadband Internet Service Providers assign dynamic (changing) IP addresses. Using a DDNS service provider, your friends can enter your host name to connect to your game server no matter what your IP address is.

[Sign up for D-Link's Free DDNS service at www.DLinkDDNS.com.](http://www.DLinkDDNS.com)

Save Settings Don't Save Settings

DYNAMIC DNS SETTINGS

Enable Dynamic DNS :

Server Address :

Host Name :

Username or Key :

Password or Key :

Verify Password or Key :

Timeout : 567 (hours)

Status : Disconnected

DYNAMIC DNS FOR IPV6 HOSTS

Enable :

Helpful Hints...

- To use this feature, you must first have a Dynamic DNS account from one of the providers in the drop down menu.
- We could also use DDNS function for IPv6 with the same account as IPv4.

• More...

In this section, the following parameters can be configured:

Enable Dynamic DNS: Tick this option to enable the Dynamic DNS feature.

Server Address: Select the Dynamic DNS service provider from the drop-down menu.

Host Name: Enter the Dynamic DNS hostname here.

Username of Key: Enter the Dynamic DNS username or key here.

Password or Key: Enter the Dynamic DNS password or key here.

Verify Password or Key: Enter the Dynamic DNS password or key here again.

Timeout: Enter the time-out value used here.

Status: Displays the current Dynamic DNS status.

DYNAMIC DNS SETTINGS

Enable Dynamic DNS :

Server Address :

Host Name :

Username or Key :

Password or Key :

Verify Password or Key :

Timeout : (hours)

Status : Disconnected

In this section, the following parameters can be configured:

Enable: Tick this option to enable the Dynamic DNS feature for IPv6 hosts.

IPv6 Address: Enter or select the IPv6 address of the host here.

Host Name: Enter the IPv6 host name here.

Click the **Save** button to accept and save the changes made.

Click the **Clear** button to clear the information entered in the parameter fields.


DYNAMIC DNS FOR IPV6 HOSTS

Enable :

IPv6 Address : <<

Host Name : (e.g.: ipv6.mydomain.net)

In this section, a list of IPv6 Dynamic DNS hosts will be displayed.

Click the  icon to modify the specific entry.

Click the  icon to delete the specific entry.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

IPV6 DYNAMIC DNS LIST

Enable	Host Name	IPv6 Address		
<input type="checkbox"/>				

Diagnostics

To access the **Diagnostics** page, click on the **Maintenance** menu link, at the top, and then click on the **Diagnostics** menu link, on the left.

On this page we can initiate and view connection diagnostics for this router.

D-Link

DSL-2890AL //

SETUP ADVANCED MAINTENANCE STATUS HELP

ADMIN
TIME
SYSLOG
EMAIL SETTINGS
SYSTEM
FIRMWARE
DYNAMIC DNS
DIAGNOSTICS
SCHEDULES

DIAGNOSTICS

This Diagnostics supports ICMP Ping Test and OAM F4/F5 Ping Test. It also display the connection status to local networks.

THE CONNECTION TO LOCAL NETWORK

Lan1 Connection:	PASS
Lan2 Connection:	FAIL
Lan3 Connection:	FAIL
Lan4 Connection:	FAIL

Refresh

THE CONNECTION TO DSL SERVICE PROVIDER

xDSL Synchronization: FAIL

PING TEST

Host Name or IP Address : Ping

Host Name or IPv6 Address : Ping

Enter a host name or IP address above and click 'Ping'

Helpful Hints...

- "Ping" checks whether a computer on the Internet is running and responding. Enter either the IP address of the target computer or enter its fully qualified domain name.
- [More...](#)

In this section, we can initiate and view diagnostic test information for the LAN connectivity of this router.

Click the **Refresh** button to refresh the information displayed in this section.

THE CONNECTION TO LOCAL NETWORK

Lan1 Connection:	PASS
Lan2 Connection:	FAIL
Lan3 Connection:	FAIL
Lan4 Connection:	FAIL

Refresh

In this section, we can initiate and view diagnostic test information for the WAN connectivity of this router.

In this section, we can initiate a ping test to IPv4 and IPv6 addresses. The following parameters can be configured:

Host Name or IP Address: Enter the IPv4 address or host name of the target here and click the **Ping** button to initiate the Ping test.

Host Name or IPv6 Address: Enter the IPv6 address or host name of the target here and click the **Ping** button to initiate the Ping test.

THE CONNECTION TO DSL SERVICE PROVIDER

xDSL Synchronization:

FAIL

PING TEST

Host Name or IP Address :

Ping

Host Name or IPv6 Address :

Ping

Enter a host name or IP address above and click 'Ping'

Schedules

To access the **Schedules** page, click on the **Maintenance** menu link, at the top, and then click on the **Schedules** menu link, on the left.

On this page we can configure time and date schedules used by this router.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

SCHEDULES

The Schedule configuration option is used to manage schedule rules for "WAN", "Wireless", "Virtual Server", "Port Forwarding", "Applications" and "Network Filter".

10 -- ADD SCHEDULE RULE

Name :

Day(s) : All Week Select Day(s)

Sun Mon Tue Wed Thu Fri Sat

All Day - 24 hrs :

Time Format : 12-hour

Start Time : 12 : 0 AM (hour:minute)

End Time : 11 : 59 PM (hour:minute)

SCHEDULE RULES LIST

Name	Day(s)	Time Frame

Helpful Hints...

- Schedules are used with a number of other features to define when those features are in effect.
- Give each schedule a name that is meaningful to you. For example, a schedule for Monday through Friday from 3:00pm to 9:00pm, might be called "After School".
- Click **Add** to add a completed schedule to the list below.
- Click **Edit** icon to change an existing schedule.
- Click **Delete** icon to permanently delete a schedule.
- [More...](#)

In this section, the following parameters can be configured:

Name: Enter the name for the time and date schedule here.

Days(s): Select the **All Week** option to use all the weekdays for this schedule.
Select the **Select Day(s)** option to use only the selected days in the week.

All Day – 24 hrs: Tick this option to use all the hours in a day.

Time Format: Select the time format here. Options to choose from are **12-hour** and **24-hour**.


Start Time: If, the **All Day** option is not selected, enter the starting time here.

End Time: If the **All Day** option is not selected, enter the ending time here.

Click the **Add** button to add this schedule into the schedule rules list.

Click the **Cancel** button to discard the changes made.

In this section, we can view and modify time schedule rules.

Click the  icon to modify the specific entry.

Click the  icon to delete the specific entry.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

10 -- ADD SCHEDULE RULE

Name :

Day(s) : All Week Select Day(s)



Sun Mon Tue Wed Thu Fri Sat

All Day - 24 hrs :

Time Format : 12-hour

Start Time : 12 : 0 (hour:minute)

End Time : 11 : 59 (hour:minute)

SCHEDULE RULES LIST				
Name	Day(s)	Time Frame		
BusinessHours	MON,TUE,WED,THU,FRI	8:00 ~ 18:00		

Status Category

The **Status** category is designed to assist the user with information display pages, concerning the configuration and behavior of this product.

The following pages can be found in the **Status** category:

- **Device Info** - On this page we can view General, WAN, LAN, and Wireless information about this router.
- **Logs** - On this page we can view and configure the system log settings for this router.
- **Statistics** - On this page we can view LAN, WAN, and Wireless interface statistics for this router.
- **Internet Sessions** - On this page we can view active Internet session information of this router.
- **Wireless** - On this page we can view a list of wireless clients connected to this router.
- **Routing** - On this page we can view a list of active IPv4 routing sessions on this router.
- **IPv6** - On this page we can view IPv6 Internet and networks connection details on this router.
- **IPv6 Routing** - On this page we can view a list of active IPv6 routing sessions on this router.

The screenshot displays the D-Link web user interface for a DSL-2890AL router. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar contains a menu with options: DEVICE INFO, LOGS, STATISTICS, INTERNET SESSIONS, WIRELESS, ROUTING, IPV6, IPV6 ROUTING, and LOGOUT. The main content area is titled "DEVICE INFORMATION" and contains a "GENERAL" section with the following details:

- Time : 2000/01/01 04:13:53
- Firmware Version : AU_1.02.04 Tue 21 Jan 2014
- DSL Firmware Version : A2pG038i.d24h
- DSL Line State : Disabled
- DSL Line Rate - Upstream : 0 (Kbps)
- DSL Line Rate - Downstream : 0 (Kbps)
- mydlink Service : Non-Registered

Below the "GENERAL" section is the "WAN" section, which shows the following configuration:

- Interface : PVC1
- Connection Type : PPPoE
- Network Status : Disconnected
- Buttons: Connect, Disconnect
- Connection Up Time : 0 Day 0 Hour 0 Min 0 Sec
- MAC Address : 00:50:ba:11:22:56
- Local address : 0.0.0.0
- Subnet Mask : 0.0.0.0
- Peer address : 0.0.0.0
- Primary DNS Server : 0.0.0.0
- Secondary DNS Server : 0.0.0.0

The "LAN" section is partially visible at the bottom of the screenshot. On the right side, there is a "Helpful Hints..." section with a link to "More..."

Device Info

To access the **Device Info** page, click on the **Status** menu link, at the top, and then click on the **Device Info** menu link, on the left.

On this page we can view General, WAN, LAN, and Wireless information about this router.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

DEVICE INFO

LOGS
STATISTICS
INTERNET SESSIONS
WIRELESS
ROUTING
IPv6
IPv6 ROUTING
LOGOUT

DEVICE INFORMATION

All of your Internet and network connection details are displayed on this page. The firmware version is also displayed here.

Helpful Hints...

- All of your LAN, Internet and WIRELESS 802.11N connection details are displayed here.
- [More...](#)

GENERAL

Time : 2000/01/01 04:13:53
 Firmware Version : AU_1.02.04 Tue 21 Jan 2014
 DSL Firmware Version : A2pG038l.d24h
 DSL Line State : Disabled
 DSL Line Rate - Upstream : 0 (Kbps)
 DSL Line Rate - Downstream : 0 (Kbps)
 mydlink Service : Non-Registered

WAN

Interface : PVC1
 Connection Type : PPPoE
 Network Status : Disconnected
 Connect Disconnect
 Connection Up Time : 0 Day 0 Hour 0 Min 0 Sec
 MAC Address : 00:50:ba:11:22:56
 Local address : 0.0.0.0
 Subnet Mask : 0.0.0.0
 Peer address : 0.0.0.0
 Primary DNS Server : 0.0.0.0
 Secondary DNS Server : 0.0.0.0

LAN

In this section, we can view general information about this router.

GENERAL

Time : 2000/01/01 04:14:47
Firmware Version : AU_1.02.04 Tue 21 Jan 2014
DSL Firmware Version : A2pG038i.d24h
DSL Line State : Disabled
DSL Line Rate - Upstream : 0 (Kbps)
DSL Line Rate - Downstream : 0 (Kbps)
mydlink Service : Non-Registered

In this section, we can view information regarding the WAN connection of this router.

WAN

Interface : PVC1
Connection Type : PPPoE
Network Status : Disconnected

Connection Up Time : 0 Day 0 Hour 0 Min 0 Sec
MAC Address : 00:50:ba:11:22:56
Local address : 0.0.0.0
Subnet Mask : 0.0.0.0
Peer address : 0.0.0.0
Primary DNS Server : 0.0.0.0
Secondary DNS Server : 0.0.0.0

In this section, we can view information regarding the LAN connection of this router.

LAN

MAC Address : 00:50:ba:11:22:54
IP Address : 192.168.1.1
Subnet Mask : 255.255.255.0
DHCP Server : Enabled

In this section, we can view information regarding the 2.4GHz band wireless connection of this router.

WIRELESS LAN

Wireless Radio : Enabled
MAC Address : 00:50:ba:11:22:54
802.11 Mode : Mixed 802.11n, 802.11g and 802.11b
Channel Width : 20/40MHz
Channel : 11
Network Name (SSID) : D-Link DSL-2890AL
Wi-Fi Protected Setup : Enabled/Unconfigured
Security : Disabled

Guest Zone Wireless Radio : Disabled
Guest Zone Network Name (SSID) : D-Link DSL-2890AL_GUEST
Guest Zone Security : Disabled

In this section, we can view information regarding the 5GHz band wireless connection of this router.

WIRELESS LAN2

Wireless Radio : Enabled
MAC Address : 00:50:ba:11:22:55
802.11 Mode : Mixed 802.11ac, 802.11n and 802.11a
Channel Width : 20/40/80MHz
Channel : 36
Network Name (SSID) : D-Link DSL-2890AL_5GHz
Wi-Fi Protected Setup : Enabled/Unconfigured
Security : Disabled

Guest Zone Wireless Radio : Disabled
Guest Zone Network Name (SSID) : D-Link DSL-2890AL_5GHz_GUEST
Guest Zone Security : Disabled

In this section, we can view a list of local computers connected to the LAN ports of this router.

LAN COMPUTERS		
MAC Address	IP Address	Name(if any)
00:23:7d:bc:2e:18	192.168.1.8	

In this section, we can view IGMP multicast memberships.

IGMP MULTICAST MEMBERSHIPS
IPv4 Multicast Group Address
IPv6 Multicast Group Address

Logs

To access the **Logs** page, click on the **Status** menu link, at the top, and then click on the **Logs** menu link, on the left.

On this page we can view and configure the system log settings for this router.

Click the **Save Settings** button to accept the changes made.

Click the **Don't Save Settings** button to discard the changes made.

The screenshot shows the D-Link web interface for a DSL-2890AL router. The top navigation bar includes links for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar lists various configuration categories, with LOGS selected. The main content area is titled 'VIEW LOG' and contains the following sections:

- VIEW LOG:** A description stating 'The View Log displays the activities occurring on the router.' Below this are two buttons: 'Save Settings' and 'Don't Save Settings'.
- SAVE LOG FILE:** A section with the text 'Save Log File To Local Hard Drive.' and a 'Save' button.
- LOG TYPE & LEVEL:** This section allows configuration of log types and levels. Log Type options are 'System', 'Firewall & Security', and 'Router Status'. Log Level options are 'Critical', 'Warning', and 'Information' (which is selected).
- LOG FILES:** This section includes navigation buttons: 'First Page', 'Last Page', 'Previous', 'Next', 'Clear', and 'Link To Email Log Settings'. Below the buttons, it shows '1/1' entries in a table:

Time	Message
Sat Jan 1 04:09:09 2000	Web logout from 192.168.1.8
Sat Jan 1 04:04:26 2000	Web logout from 192.168.1.8
Sat Jan 1 03:57:16 2000	Web logout from 192.168.1.8
Sat Jan 1 03:48:41 2000	Web logout from 192.168.1.8

On the right side of the interface, there is a 'Helpful Hints...' section with several tips:

- Click on the Save button to save log file to local hard drive which can later send to the network administrator for troubleshooting. You can also select what type of event you would like to be logged from Log Type & Level.
- Check the log frequently to detect unauthorized network usage.
- You can also have the log mailed to you periodically. Refer to [Tools -> EMail](#).
- [More...](#)

In this section, we can initiate the saving of the log file to the management computer.

Click the **Save** button to download the log file to the management computer.

This is a close-up view of the 'SAVE LOG FILE' section from the screenshot above. It shows the text 'Save Log File To Local Hard Drive.' followed by a 'Save' button.

In this section, the following parameters can be configured:

Log Type: Select the log type that will be displayed here. Options to choose from are **System**, **Firewall**, and **Router Status**.

Log Level: Select the log level that will be displayed here. Options to choose from are **Critical**, **Warning**, and **Information**.

LOG TYPE & LEVEL

Log Type:

Log Level: Critical Warning Information

In this section, the system log will be displayed.

Click the **First Page** button to view the first page.

Click the **Last Page** button to view the last page.

Click the **Previous** button to view the previous page.

Click the **Next** button to view the next page.

Click the **Clear** button to the log.

Click the **Link To Email Log Settings** button to navigate to the **Email Settings** configuration page.

LOG FILES

1/1

Time	Message
Sat Jan 1 04:09:09 2000	Web logout from 192.168.1.8
Sat Jan 1 04:04:26 2000	Web logout from 192.168.1.8
Sat Jan 1 03:57:16 2000	Web logout from 192.168.1.8
Sat Jan 1 03:48:41 2000	Web logout from 192.168.1.8
Sat Jan 1 01:25:52 2000	Web logout from 192.168.1.8
Sat Jan 1 00:00:35 2000	warning: no upstream servers configured
Sat Jan 1 00:00:07 2000	no servers found in /etc/resolv.conf, will retry

Statistics

To access the **Statistics** page, click on the **Status** menu link, at the top, and then click on the **Statistics** menu link, on the left.

On this page we can view LAN, WAN, and Wireless interface statistics for this router.

Click the **Refresh Statistics** button to refresh the information on this page.

Click the **Reset Statistics** button to clear the information on the page.

D-Link

DSL-2890AL // SETUP ADVANCED MAINTENANCE STATUS HELP

DEVICE INFO
LOGS
STATISTICS
INTERNET SESSIONS
WIRELESS
ROUTING
IPv6
IPv6 ROUTING
LOGOUT

TRAFFIC STATISTICS

Traffic Statistics displays Receive and Transmit packets passing through the device.

Refresh Statistics Reset Statistics

XDSL STATISTICS

Mode:		
Status:		Disabled
Link Power State:		
	Downstream	Upstream
Line Coding(Trellis):		
SNR Margin (0.1 dB):		
Attenuation (0.1 dB):		
Output Power (0.1 dBm):		
Attainable Rate (Kbps):		
Rate (Kbps)		
Super Frames:		
Super Frame Errors:		
RS Words:		
RS Correctable Errors:		
RS Uncorrectable Errors:		
HEC Errors:		
OCD Errors:		

Helpful Hints...

- This is a summary displaying the number of packets that have passed between the Internet and the LAN since the router was last initialized.
- [More...](#)

In this section, we can view XDSL statistics.

Click the **xDSL BER Test** button to initiate the xDSL BER test.

XDSL STATISTICS

Mode:		
Status:	Disabled	
Link Power State:		
	Downstream	Upstream
Line Coding(Trellis):		
SNR Margin (0.1 dB):		
Attenuation (0.1 dB):		
Output Power (0.1 dBm):		
Attainable Rate (Kbps):		
Rate (Kbps)		
Super Frames:		
Super Frame Errors:		
RS Words:		
RS Correctable Errors:		
RS Uncorrectable Errors:		
HEC Errors:		
OCD Errors:		
LCD Errors:		
Total Cells:		
Data Cells:		
Bit Errors:		
Total ES:		
Total SES:		
Total UAS:		
<input type="button" value="xDSL BER Test"/>		

In this section, we can view xTM statistics.

XTM STATISTICS

In this section, we can view LAN interface statistics.

LAN STATISTICS

Sent :	4722	Received :	4047
TX Packets Dropped :	0	RX Packets Dropped :	0
Collisions :	0	Errors :	0

In this section, we can view WAN interface statistics.

WAN STATISTICS

Sent :	46	Received :	149
TX Packets Dropped :	0	RX Packets Dropped :	0
Collisions :	0	Errors :	0

In this section, we can view 2.4GHz wireless interface statistics.

WIRELESS STATISTICS - 2.4GHZ BAND

Sent :	236	Received :	0
TX Packets Dropped :	0	RX Packets Dropped :	0
Collisions :	0	Errors :	0

In this section, we can view 5GHz wireless interface statistics.

WIRELESS STATISTICS - 5GHZ BAND

Sent :	234	Received :	0
TX Packets Dropped :	0	RX Packets Dropped :	0
Collisions :	0	Errors :	0

Internet Sessions

To access the **Internet Sessions** page, click on the **Status** menu link, at the top, and then click on the **Internet Sessions** menu link, on the left.

On this page we can view active Internet session information of this router.

Click the **Refresh** button to refresh the information on this page.

The screenshot shows the D-Link web interface for a DSL-2890AL router. The top navigation bar includes 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists various configuration options, with 'INTERNET SESSIONS' selected. The main content area displays the 'INTERNET SESSIONS' page, which includes a 'Refresh' button and a table showing active sessions. A 'Helpful Hints...' sidebar is also visible on the right.

IP	TCP Count	UDP Count
127.0.0.1	0	2

In this section, we can view active Internet sessions and information.

IP	TCP Count		UDP Count			
127.0.0.1	0		2			
	Protocol	NAT	Internet	State	Dir	Time Out
	UDP	58954	127.0.0.1:58954	--	OUT	64
		39170	127.0.0.1:53	--	OUT	67

Wireless

To access the **Wireless** page, click on the **Status** menu link, at the top, and then click on the **Wireless** menu link, on the left.

On this page we can view a list of wireless clients connected to this router.

The screenshot shows the D-Link web interface. At the top, there is a navigation bar with tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar contains a menu with options like DEVICE INFO, LOGS, STATISTICS, INTERNET SESSIONS, WIRELESS, ROUTING, IPv6, and IPv6 ROUTING. The main content area is titled 'CONNECTED WIRELESS CLIENT LIST' and includes a helpful hint. Below the title, it shows the number of wireless clients for the 2.4GHz band (1) and the 5GHz band (0). A table lists the connected clients for the 2.4GHz band.

CONNECTED WIRELESS CLIENT LIST					
View the wireless clients that are connected to the router. (A client might linger in the list for a few minutes after an unexpected disconnect.)					
NUMBER OF WIRELESS CLIENTS - 2.4GHZ BAND : 1					
MAC Address	IP Address	Mode	Rate (Mbps)	Signal (%)	
1C:7E:E5:CB:92:47	192.168.1.2	11n	13	100	

Helpful Hints...
 • This is a list of all wireless clients that are currently connected to your wireless router.
 • [More...](#)

In this section, we can view a list of connected 2.4GHz wireless clients.

NUMBER OF WIRELESS CLIENTS - 2.4GHZ BAND : 1					
MAC Address	IP Address	Mode	Rate (Mbps)	Signal (%)	
1C:7E:E5:CB:92:47	192.168.1.2	11n	13	100	

In this section, we can view a list of connected 5GHz wireless clients.

NUMBER OF WIRELESS CLIENTS - 5GHZ BAND : 0					
MAC Address	IP Address	Mode	Rate (Mbps)	Signal (%)	

Routing

To access the **Routing** page, click on the **Status** menu link, at the top, and then click on the **Routing** menu link, on the left.

On this page we can view a list of active IPv4 routing sessions on this router.

The screenshot shows the D-Link web interface for a DSL-2890AL router. The top navigation bar includes tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar contains a menu with options: DEVICE INFO, LOGS, STATISTICS, INTERNET SESSIONS, WIRELESS, ROUTING (selected), IPv6, and IPv6 ROUTING. The main content area is titled "ROUTING" and "Routing Table", with a sub-header "ROUTING TABLE". It displays a table of active routes. A "Helpful Hints..." section on the right provides additional information.

Destination	Gateway	Genmask	Metric	Iface	Creator
192.168.69.0	0.0.0.0	255.255.255.0	0	INTERNET	SYSTEM
192.168.7.0	0.0.0.0	255.255.255.0	0	LAN	SYSTEM
192.168.1.0	0.0.0.0	255.255.255.0	0	LAN	SYSTEM
239.0.0.0	0.0.0.0	255.0.0.0	0	LAN	SYSTEM
0.0.0.0	192.168.69.1	255.255.255.255	100	INTERNET	SYSTEM

In this section, we can view a list of active routes routing through this router.

Destination	Gateway	Genmask	Metric	Iface	Creator
192.168.69.0	0.0.0.0	255.255.255.0	0	INTERNET	SYSTEM
192.168.7.0	0.0.0.0	255.255.255.0	0	LAN	SYSTEM
192.168.1.0	0.0.0.0	255.255.255.0	0	LAN	SYSTEM
239.0.0.0	0.0.0.0	255.0.0.0	0	LAN	SYSTEM
0.0.0.0	192.168.69.1	255.255.255.255	100	INTERNET	SYSTEM

IPv6

To access the **IPv6** page, click on the **Status** menu link, at the top, and then click on the **IPv6** menu link, on the left.

On this page we can view IPv6 Internet and networks connection details on this router.

The screenshot shows the D-Link web user interface. At the top, there is a navigation bar with tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The STATUS tab is selected. On the left, there is a vertical menu with options: DSL-2890AL, DEVICE INFO, LOGS, STATISTICS, INTERNET SESSIONS, WIRELESS, ROUTING, IPv6, and IPv6 ROUTING. The IPv6 option is selected. The main content area is divided into three sections:

- IPv6 NETWORK INFORMATION:** A message stating "All of your IPv6 Internet and network connection details are displayed on this page."
- IPv6 CONNECTION INFORMATION:** Displays the following details:
 - IPv6 Connection Type : Link-Local
 - IPv6 Default Gateway : None
 - LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64
- LAN IPv6 COMPUTERS:** A table with two columns: IPv6 Address and Name(if any).

On the right side, there is a "Helpful Hints..." sidebar with a bullet point: "All of your WAN and LAN connection details are displayed here." and a "More..." link.

In this section, we can view IPv6 connection information.

This section displays the following IPv6 connection information:

- IPv6 Connection Type : Link-Local
- IPv6 Default Gateway : None
- LAN IPv6 Link-Local Address : fe80::9294:e4ff:fe3e:951e /64

In this section, we can view a list of LAN IPv6 computers connected to this router.


This section displays a table for LAN IPv6 computers:

IPv6 Address	Name(if any)

IPv6 Routing

To access the **IPv6 Routing** page, click on the **Status** menu link, at the top, and then click on the **IPv6 Routing** menu link, on the left.

On this page we can view a list of active IPv6 routing sessions on this router.

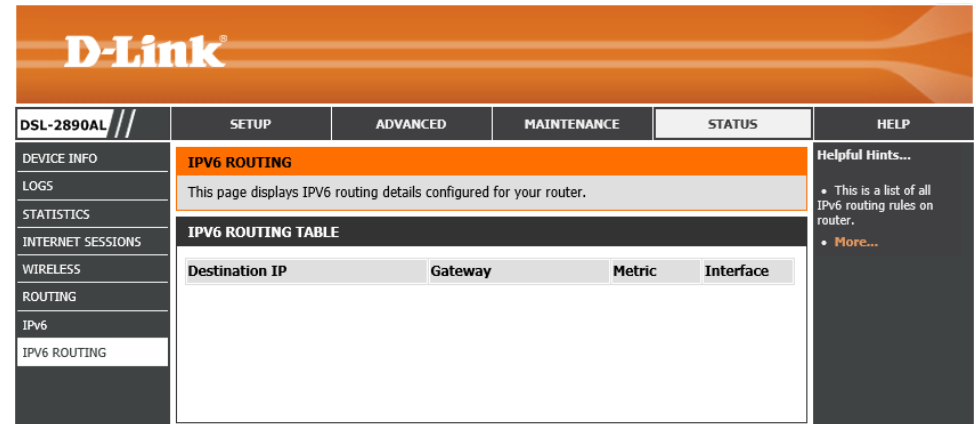

The screenshot shows the D-Link web interface for the IPv6 Routing page. The top navigation bar includes links for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. The left sidebar contains a menu with options like DEVICE INFO, LOGS, STATISTICS, INTERNET SESSIONS, WIRELESS, ROUTING, and IPv6. The main content area features a title 'IPv6 ROUTING' and a description: 'This page displays IPv6 routing details configured for your router.' Below this is an empty table titled 'IPv6 ROUTING TABLE' with columns for Destination IP, Gateway, Metric, and Interface. A 'Helpful Hints...' section on the right provides additional information and a 'More...' link.

In this section, we can view active IPv6 routes routing through this router.

IPv6 ROUTING TABLE			
Destination IP	Gateway	Metric	Interface

Help Category

The **Help** category is designed to assist the user with helpful information about every topic found on the web user interface of this product.

The following pages can be found in the **Help** category:

- **Menu** – On this page the user can navigate easily to any page throughout the menu structure to access help information.
- **Setup** – On this page the user can read more about topics discussed in the Setup category.
- **Advanced** – On this page the user can read more about topics discussed in the Advanced category.
- **Maintenance** – On this page the user can read more about topics discussed in the Maintenance category.
- **Status** – On this page the user can read more about topics discussed in the Status category.

The screenshot displays the D-Link web user interface for a DSL-2890AL modem router. The top navigation bar includes the D-Link logo and tabs for SETUP, ADVANCED, MAINTENANCE, STATUS, and HELP. A left-hand menu lists the main categories: MENU, SETUP, ADVANCED, MAINTENANCE, and STATUS. The main content area is titled 'SUPPORT MENU' and is divided into three sections: 'SUPPORT MENU' (with links to Setup, Advanced, Maintenance, and Status), 'SETUP HELP' (with links to Internet, Wireless Settings, Network Settings, Storage, Media Server, IPv6, and MYDLINK SETTINGS), and 'ADVANCED HELP' (with links to Virtual Server, Port Forwarding, Port Triggering, QoS Engine, Network Filter, Access Control, Website Filter, Inbound Filter, Firewall Settings, Routing, Advanced Wireless, Wi-Fi Protected Setup, Advanced Network, GUEST Wi-Fi, IPv6 Firewall, and IPv6 Routing).

Knowledge Base


Networking Basics

Check your IP address

After you installed your new network or wireless adapter, by default, the TCP/IP settings should be set to obtain an IP address automatically from a DHCP server. By default the DHCP server option on your router is enabled.

To verify your IP address, please follow the steps below:

- Click on the Windows **Start** button and open the **Run** application.
- In the **Open** box type *cmd* and click **OK**.
- At the command prompt, type in the command *ipconfig* and press **Enter**. This will display the **IP address**, **Subnet Mask**, and the **Default Gateway** of your adapter. If the address is *0.0.0.0*, it means that your network adapter did not receive an IP address from the DHCP server. Check your adapter installation, security settings, and the settings on your router. Some firewall software programs may block a DHCP request on newly installed adapters.

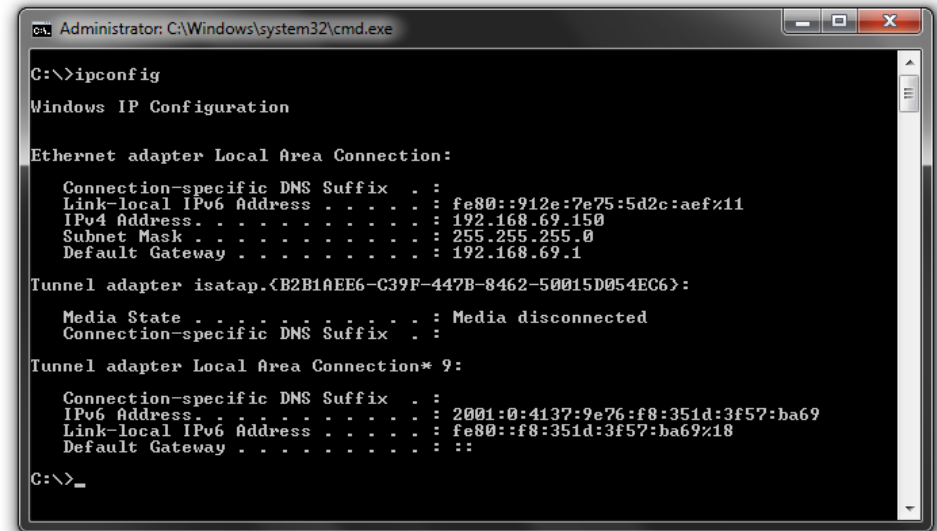

```
Administrator: C:\Windows\system32\cmd.exe
C:\>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::912e:7e75:5d2c:aefz11
    IPv4 Address. . . . . : 192.168.69.150
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.69.1

Tunnel adapter isatap.{B2B1AEE6-C39F-447B-8462-50015D054EC6}:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

Tunnel adapter Local Area Connection* 9:


    Connection-specific DNS Suffix  . : 
    IPv6 Address. . . . . : 2001:0:4137:9e76:f8:351d:3f57:ba69
    Link-local IPv6 Address . . . . . : fe80::f8:351d:3f57:ba69%18
    Default Gateway . . . . . : ::

C:\>_
```

Statically Assign an IP address

If you are not using a DHCP capable gateway/router, or you need to assign a static IP address, please follow the steps below:

- Click on the Windows **Start** button and navigate to the **Control Panel > Network and Sharing Center** and click on the **Change Adapter Settings** option on the left panel.
- Right-click on the **Local Area Connection**, which represents your network adapter, and select **Properties**.
- Select the **Internet Protocol Version 4 (TCP/IPv4)** option and click on the **Properties** button.
- Select **Use the following IP address** and enter an IP address that is on the same subnet as your router. For example: If your router is running on the IP address of **192.168.1.1**, use any IP address from **192.168.1.2** to **192.168.69.254**. Use the Subnet Mask of **255.255.255.0**. Set Default Gateway the same as the LAN IP address of your router. Set Preferred DNS server IP address the same as the LAN IP address of your router. The Secondary DNS is not needed at this stage.
- Click the **OK** button twice to return to the **Network Connections** window.

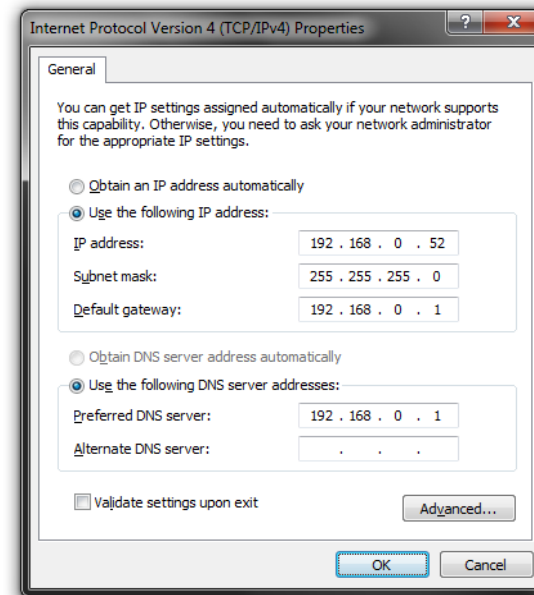

Wireless Basics

Wireless products are based on industry standards to provide easy-to-use and compatible high-speed wireless connectivity within your home, business or public access wireless networks. Strictly adhering to the IEEE standard, the wireless family of products will allow you to securely access the data you want, when and where you want it. You will be able to enjoy the freedom that wireless networking delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of wires. Wireless LANs are used increasingly in both home and office environments, and public areas such as airports, coffee shops and universities. Innovative ways to utilize WLAN technology are helping people to work and communicate more efficiently. Increased mobility and the absence of cabling and other fixed infrastructure have proven to be beneficial for many users.

Wireless users can use the same applications they use on a wired network. Wireless adapter cards used on laptop and desktop systems support the same protocols as Ethernet adapter cards.

Under many circumstances, it may be desirable for mobile network devices to link to a conventional Ethernet LAN in order to use servers, printers or an Internet connection supplied through the wired LAN. A Wireless Router is a device used to provide this link.

What is Wireless?

Wireless or Wi-Fi technology is another way of connecting your computer to the network without using wires. Wi-Fi uses radio frequency to connect wirelessly, so you have the freedom to connect computers anywhere in your home or office network.

How does Wireless work?

Wireless works similar to how cordless phone work, through radio signals to transmit data from one point A to point B. But wireless technology has restrictions as to how you can access the network. You must be within the wireless network range area to be able to connect your computer. There are two different types of wireless networks Wireless Local Area Network (WLAN), and Wireless Personal Area Network (WPAN).

Wireless Local Area Network (WLAN)

In a wireless local area network, a device called an Access Point (AP) connects computers to the network. The access point has a small antenna attached to it, which allows it to transmit data back and forth over radio signals. With an indoor access point as seen in the picture, the signal can travel up to 300 feet. With an outdoor access point the signal can reach out up to 30 miles to serve places like manufacturing plants, industrial locations, college and high school campuses, airports, golf courses, and many other outdoor venues.

Wireless Personal Area Network (WPAN)

Bluetooth is the industry standard wireless technology used for WPAN. Bluetooth devices in WPAN operate in a range up to 30 feet away. Compared to WLAN the speed and wireless operation range are both less than WLAN, but in return it doesn't use nearly as much power which makes it ideal for personal devices, such as mobile phones, PDAs, headphones, laptops, speakers, and other devices that operate on batteries.

Who uses wireless?

Wireless technology has become so popular in recent years that almost everyone is using it, whether it's for home, office, business, we have a wireless solution for it.

Home

- Gives everyone at home broadband access.
- Surf the web, check email, instant message, etc...
- Gets rid of the cables around the house.
- Simple and easy to use.

Small Office and Home Office

- Stay on top of everything at home as you would at office.
- Remotely access your office network from home.
- Share Internet connection and printer with multiple computers.
- No need to dedicate office space.

Where is wireless used?

Wireless technology is expanding everywhere not just at home or office. People like the freedom of mobility and it's becoming so popular that more and more public facilities now provide wireless access to attract people. The wireless connection in public places is usually called "hotspots".

Using a Wireless Cardbus Adapter with your laptop, you can access the hotspot to connect to Internet from remote locations like: Airports, Hotels, Coffee Shops, Libraries, Restaurants, and Convention Centers.

Wireless network is easy to setup, but if you're installing it for the first time it could be quite a task not knowing where to start. That's why we've put together a few setup steps and tips to help you through the process of setting up a wireless network.

Tips

Here are a few things to keep in mind, when you install a wireless network.

Centralize your router or Access Point

Make sure you place the router/access point in a centralized location within your network for the best performance. Try to place the router/access point as high as possible in the room, so the signal gets dispersed throughout your home. If you have a two-story home, you may need a repeater to boost the signal to extend the range.

Eliminate Interference

Place home appliances such as cordless telephones, microwaves, and televisions as far away as possible from the router/access point. This would significantly reduce any interference that the appliances might cause since they operate on same frequency.

Security

Don't let your next-door neighbors or intruders connect to your wireless network. Secure your wireless network by turning on the WPA or WEP security feature on the router. Refer to product manual for detail information on how to set it up.

Wireless Modes

There are basically two modes of networking:

- **Infrastructure** – All wireless clients will connect to an access point or wireless router.
- **Ad-Hoc** – Directly connecting to another computer, for peer-to-peer communication, using wireless network adapters on each computer, such as two or more wireless network Cardbus adapters.

An Infrastructure network contains an Access Point or wireless router. All the wireless devices, or clients, will connect to the wireless router or access point.

An Ad-Hoc network contains only clients, such as laptops with wireless Cardbus adapters. All the adapters must be in Ad-Hoc mode to communicate.

Wireless Security

This section will show you the different levels of security you can use to protect your data from intruders. The router offers wireless security options like WPA/WPA2 PSK/EAP.

What is WPA?

WPA (Wi-Fi Protected Access) is a Wi-Fi standard that was designed to improve the security features of WEP (Wired Equivalent Privacy).

The 2 major improvements over WEP:

- Improved data encryption through the Temporal Key Integrity Protocol (TKIP). TKIP scrambles the keys using a hashing algorithm and, by adding an integrity-checking feature, ensures that the keys haven't been tampered with. WPA2 is based on 802.11i and uses Advanced Encryption Standard (AES) instead of TKIP.
- User authentication, which is generally missing in WEP, through the extensible authentication protocol (EAP). WEP regulates access to a wireless network based on a computer's hardware-specific MAC address, which is relatively simple to be sniffed out and stolen. EAP is built on a more secure public-key encryption system to ensure that only authorized network users can access the network.

WPA-PSK/WPA2-PSK uses a passphrase or key to authenticate your wireless connection. The key is an alpha-numeric password between 8 and 63 characters long. The password can include symbols (!?*&_) and spaces. This key must be the exact same key entered on your wireless router or access point.

WPA/WPA2 incorporates user authentication through the Extensible Authentication Protocol (EAP). EAP is built on a more secure public key encryption system to ensure that only authorized network users can access the network.

Frequently Asked Questions

What can I do if my Router is not working correctly?

There are a few quick steps you can take to try and resolve any issues:

- Check that all the cables are firmly connected at both ends.
- Check that all the corresponding LED indicators are on, especially the Power, DSL, and LAN LED indicators.
- Ensure that the settings on the WAN Service page in the Web User Interface are the same as the settings that have been provided to you by your ISP.

Why can't I get an Internet connection?

For ADSL ISP users, please contact your ISP to make sure the service has been enabled/connected by your ISP and that your ISP username and password are correct.

What can I do if I forgot my web UI login password?

If you forgot your password, you must reset your router. Unfortunately this process will change all your settings back to the factory defaults.

To reset the router, locate the reset button (hole) on the rear panel of the unit. With the router powered on, use a paperclip to hold the button down for 10-15 seconds. Release the button and the router will go through its reboot process. Wait about 30 seconds to access the router. The default IP address is **192.168.1.1**. When logging in, the username is '**admin**' and the password is '**admin**'.

How to set up other PVCs for IPTV and using IGMP?

1. Contact your ISP to make sure that the IPTV service has been enabled/connected.
2. Go to **SETUP** -> **INTERNET**, and click the **Manual Internet Connection Setup** button. Make sure the PVC settings, usually PVC2, the ATM settings, and Internet Connection settings are correct. When a deactivated PVC setting is used, select the **Active** check box to enable the PVC.
3. Go to **ADVANCED** -> **ADVANCED NETWORK**, and select the **Enable IPv4 Multicast Streams** check box to enable the IGMP service.

Technical Specifications

Hardware Specifications

- LAN Interface: Four 10/100/1000Mbps LAN ports
- DSL Interface: One RJ11 Internet port
- Wireless Interface (2.4Ghz): IEEE 802.11b/g/n
- Wireless Interface (5Ghz): IEEE 802.11a/ac
- USB Interface: Compliant USB 2.0 and USB 3.0

Operating Voltage

- Input: 100~240V ($\pm 10\%$), 50~60Hz
- Output: DC12V, 2.5A

Temperature

- Operating: 32°F~104°F (0°C~40°C)
- Non-Operating: -4°F~149°F (-20°C~70°C)

Humidity

- Operating: 10%~90% non-condensing
- Non-Operating: 5%~95% non-condensing

ADSL Standards

- ANSI T1.413 Issue 2
- ITU G.992.1 (G.dmt) Annex A
- ITU G.992.2 (G.lite) Annex A
- ITU G.994.1 (G.hs)

ADSL2 Standards

- ITU G.992.3 (G.dmt.bis) Annex A
- ITU G.992.4 (G.lite.bis) Annex A

ADSL2+ Standards

- ITU G.992.5 Annex A

ADSL Data Transfer Rate

- G.dmt full rate downstream: up to 8 Mbps / upstream: up to 1 Mbps
- G.lite: ADSL downstream up to 1.5 Mbps / upstream up to 512 Kbps
- G.dmt.bis full rate downstream: up to 12 Mbps / upstream: up to 12 Mbps
- ADSL full rate downstream: up to 24 Mbps / upstream: up to 1 Mbps

Wireless Frequency Range

- IEEE 802.11a: 5150 MHz~5350 MHz
- IEEE 802.11b: 2400 MHz~2497 MHz
- IEEE 802.11g: 2400 MHz~2497 MHz
- IEEE 802.11n: 2400 MHz~2497 MHz, 5150 MHz~5350 MHz

Wireless Bandwidth Rate

- IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, and 6 Mbps
- IEEE 802.11b: 11, 5.5, 2, and 1 Mbps
- IEEE 802.11g: 54, 48, 36, 24, 18, 12, 9, and 6 Mbps
- IEEE 802.11an: 6.5 to 450 Mbps
- IEEE 802.11gn: 6.5 to 300 Mbps

Wireless Channel Numbers

- IEEE 802.11a: Channels 36~64
- IEEE 802.11b: Channels 1~11 (USA), 1~13 (Europe), 1~14 (Japan)
- IEEE 802.11g: Channels 1~11 (USA), 1~13 (Europe), 1~14 (Japan)
- IEEE 802.11n: Channels 1~11 (USA), 1~13 (Europe), 1~14 (Japan), Channels 36~64

Antenna Type

- Six Internal Antennas (Three 2.4 GHz Antennas, Three 5 GHz Antennas)

Wireless Security

- 64/128bit WEP, WPA/WPA2-Personal, WPA/WPA2-Enterprise, WPS (PIN & PBC)

Certifications

- FCC P68/P15B, CE, A-tick.

Dimensions & Weight

- 213 x 173 x 52 mm (8.39 x 6.81 x 2.05 in)
- 405.52 grams (0.89 lbs)