



DIR-605L Initial WebUI Setup

1. When logging into the router for the first time via <http://192.168.0.1> it will try to determine your WAN connection type, this may take up to 80 seconds to complete.

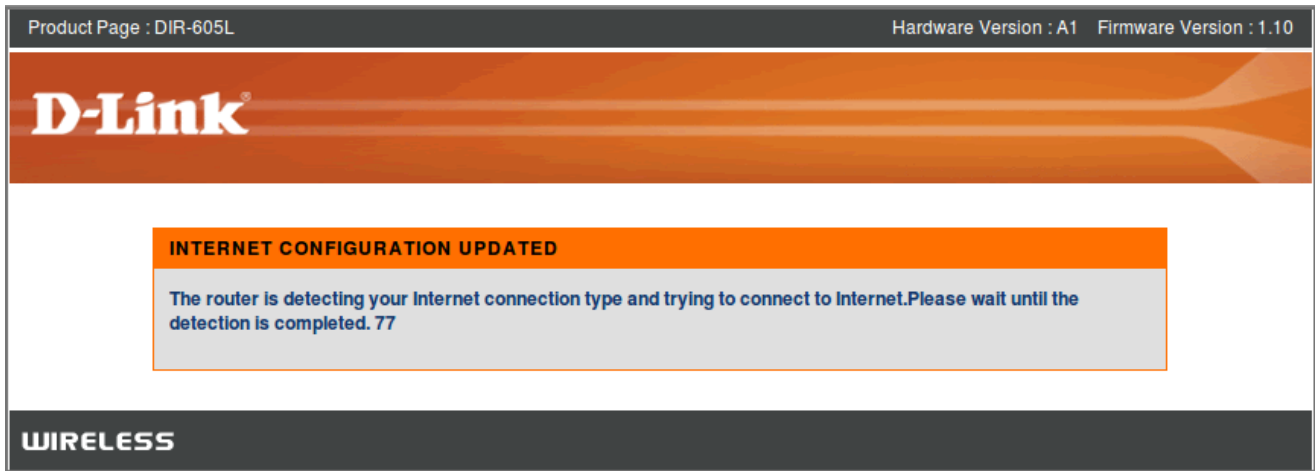

2. Once detected it will ask for more details if required, in this example a ADSL modem was detected in Bridge mode, so the PPPoE connection details can be entered. If it is not correctly detected you can change the Internet Connection type here also.

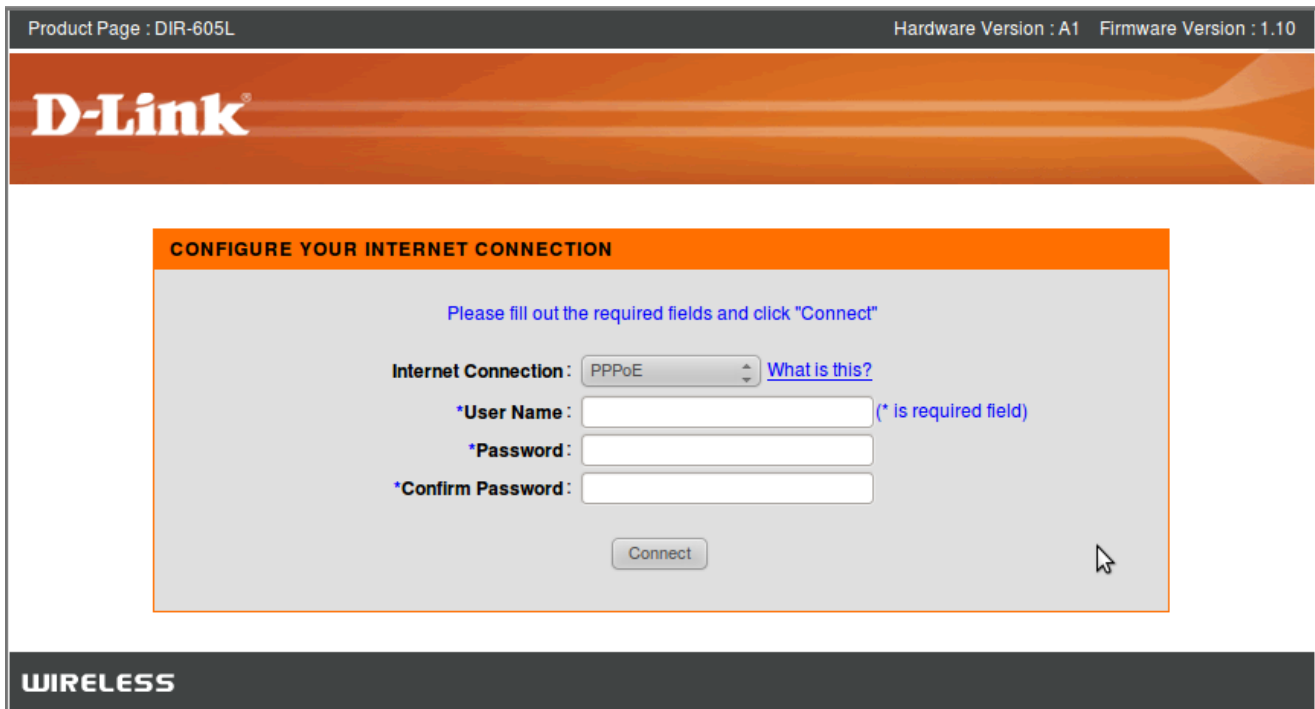

3. Now that the Internet is connected we have completed the first of 3 steps. Click on *Configure* under Wireless Settings to continue with the setup. (It is recommended to configure this now to avoid unsecure access to your network)

Product Page : DIR-605L Hardware Version : A1 Firmware Version : 1.10

D-Link

EASY SETUP COMPLETE

After clicking the "Save" button, you need to provide your username and password to access the device when logging in next time.

Internet Settings

Internet Connection : PPPoE Status : **Connected**

Wireless Settings

Wireless Network Name (SSID) : dlink Status : **Unsecured** [Configure](#)

Security : Disabled

Your current wireless security settings are not safe. We recommend you configure wireless settings.

Device Info

User Name : admin
Password :

mydlink Account

You have not activated mydlink service. Status : **Not Connected** [Configure](#)

Save my network settings
[Save](#)

WIRELESS

4. In this step we can configure the network name or SSID, it is recommended that you change this from "dlink" to something else to help identify your wireless network when connecting later on with wireless devices. Also ensure that you configure the security mode with AUTO-WPA/WPA2 and assign a Network Key or password for your wireless network. You can also generate a random Network Key by enabling the checkbox.

Product Page : DIR-605L Hardware Version : A1 Firmware Version : 1.10

D-Link

CONFIGURE YOUR WIRELESS NETWORK

Network Name (SSID) :

Security Mode : Disable Wireless Security (Not recommended)
 AUTO-WPA/WPA2(Recommended)

Network Key :

: Auto generate network key

[Save](#)

WIRELESS

5. With the Wireless Settings being configured we have completed the second of 3 steps. Click on *Configure* under mylink Account to continue with the setup.

Product Page : DIR-605L Hardware Version : A1 Firmware Version : 1.10

D-Link

EASY SETUP COMPLETE

After clicking the "Save" button, you need to provide your username and password to access the device when logging in next time.

Internet Settings

Internet Connection : PPPoE Status : **Connected**

Wireless Settings

Wireless Network Name (SSID) : ██████████ Status : **Encryption** [Configure](#)

Security : Auto (WPA or WPA2) - Personal

Network Key : ██████████

Device Info

User Name : admin

Password :

mylink Account

You have not activated mylink service. Status : **Not Connected** [Configure](#)

Save my network settings

[Save](#)

WIRELESS

6. In this step we can enter the details for an existing account or if you are a new user we can setup a new account. The Device Password field is a new password that you must assign to the DIR-605L to later access this Web UI.

Product Page : DIR-605L Hardware Version : A1 Firmware Version : 1.10

D-Link

CONFIGURE YOUR MYDLINK ACCOUNT

Do you have mydlink account?

Yes, I have a mydlink account.

No, I want to register and login with a new mydlink account.

E-mail Address (Account Name):

Password:

Device User Name:

Device Password:

WIRELESS

Product Page : DIR-605L Hardware Version : A1 Firmware Version : 1.10

D-Link

CONFIGURE YOUR MYDLINK ACCOUNT

Do you have mydlink account?

Yes, I have a mydlink account.

No, I want to register and login with a new mydlink account.

Please fulfill the options to complete the registration.

E-mail Address (Account Name): [What is this?](#)

Password:

Confirm Password:

Last name:

First Name:

Device User Name:

Device Password:

[If you want to configure the device password after registering mydlink account, please go to "manual configuration" and select "Device Administration" in "maintenance" section after you log in the device.](#)

[I Accept the mydlink terms and conditions.](#)

WIRELESS

7. Congratulations you have now completed the Initial Setup of the DIR-605L. Click Save to reboot the router with your settings. If you also select the Save my network settings checkbox a Text file will be saved to your desktop with all of the details of this setup wizard for your future use.

Product Page : DIR-605L Hardware Version : A1 Firmware Version : 1.10

D-Link

EASY SETUP COMPLETE

After clicking the "Save" button, you need to provide your username and password to access the device when logging in next time.

Internet Settings

Internet Connection : PPPoE Status : **Connected**

Wireless Settings

Wireless Network Name (SSID) : [REDACTED] Status : **Encryption**

Security : Auto (WPA or WPA2) - Personal

Network Key : [REDACTED]

Device Info

User Name : admin

Password : password

mydlink Account

You have activated mydlink service. Status : **Connected**

Save my network settings

WIRELESS

```
My_D-Link_Network_Setting.txt (~/Downloads) - gedit
File Edit View Search Tools Documents Help
Open Save Undo
My_D-Link_Network_Setting.txt x
Internet Connection: PPPoE
PPPoE Username: [REDACTED]
PPPoE Password: [REDACTED]

Network Name (SSID): [REDACTED]
Security: WPA/WPA2
Wlan Password: [REDACTED]

Username: admin
Password: password

Plain Text Tab Width: 8 Ln 1, Col 1 INS
```

8. We can now login to the mydlink account via <http://au.mydlink.com> and see the DIR-605L. You can control certain elements of your network remotely via this interface.

The screenshot displays the mydlink web interface. At the top left is the mydlink logo. On the top right, there are links for 'FAQ | Support | Language: English' and a user greeting 'Welcome, [username] | Sign out'. Below the logo, there are two tabs: 'My Devices' (selected) and 'My Profile'. On the left side, under 'My Devices', a router icon is shown with the text 'DIR-605L' and '20057059'. The main content area is divided into two tabs: 'Router Status' (selected) and 'Settings'. Under 'Router Status', there is a router icon with signal strength indicators, a 'Reboot' button, and a list of network statistics: 'Model Name: DIR-605L', 'Network Name(SSID): [redacted]', 'Internet IP: [redacted]', 'LAN IP: 192.168.0.1', and 'Connected Devices: 2 device(s)'. Below this is a 'Connection List' table with columns for Device, Device Name, IP Address, and MAC Address. The table contains two entries: 'scotty-ubuntu' with IP 192.168.0.101 and 'Scottys-iPhone4' with IP 192.168.0.102. At the bottom of the main area is a 'Suspect List' table with columns for Device, Device Name, Time, and MAC Address, which is currently empty. On the right side, there is a 'News' section with two entries dated 2011/12/03 and 2011/11/25, and a 'Support' section with links for 'Setup wizard', 'User manual', 'Firmware', and 'Quick Installation Guide'. At the bottom of the right sidebar is a 'mydlink' logo and the text 'mydlink on mobile...' with a mobile phone icon.

9. Wireless settings can be changed along with sending notifications via email.



My Devices **My Profile**

DIR-605L
20057059

Router Status **Settings**

Basic Settings

Enabled wireless

Wireless name (SSID)

Authorization type

Wireless password Show password

Wireless channel

Event Notification Settings

Enable Email Notification Setting for :

New device connected

Device failed to connect

New Firmware available

I want to send the notification from

More settings

Enable Remote Web Access

Delete Router

News

2011/12/03 12:00
Which devices does the mydlink APP not...

2011/11/25 12:00
mydlink+ app now available for iPad ...

Support

- Setup wizard
- User manual
- Firmware
- Quick Installation Guide

[GO](#)

mydlink

mydlink on mobile...

10. Finally we can also see the browsing history of users connected to the DIR-605L.

The screenshot displays the mydlink web interface for a DIR-605L router. The main navigation bar includes 'My Devices' and 'My Profile'. The router's status is shown as 'DIR-605L 20057059'. The 'Router Status' tab is active, showing a signal strength indicator and a 'Reboot' button. A 'Visited history' popup window is open, listing 14 visited URLs. The background interface also shows sections for 'Connection List' and 'Suspect List', each with a 'Device' column. The footer contains links for 'Global D-Link', 'About mydlink', 'Terms of Use', 'Privacy Policy', and 'Contact Us', along with a copyright notice for 2008-2012 D-Link Corp.

Visited history

1. ma156-r.analytics.edgesuite.net
2. safebrowsing-cache.google.com
3. safebrowsing.clients.google.com
4. rcv-srv12.inplay.tubemogul.com
5. au.mydlink.com
6. receive.inplay.tubemogul.com
7. static.inplay.tubemogul.com
8. brightcove-37.fcod.llnwd.net
9. brightcove.fcod.llnwd.net
10. load.tubemogul.com
11. goku.brightcove.com
12. 79423.analytics.edgesuite.net
13. admin.brightcove.com
14. c.brightcove.com

Refresh **Close**

~End of Document~