


DWR-113 & DWR-161

VirginBroadband - 3G/4G Settings

Open an Internet Browser and in the address bar, type in <http://192.168.0.1>

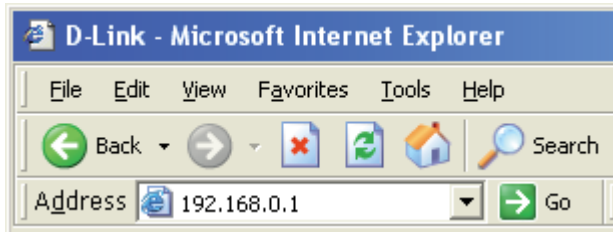

The default username is admin and the password is left blank.

A screenshot of the router's login page. The page has an orange header with the word "LOGIN". Below the header, it says "Log in to the router:". There are two input fields: "User Name" with "admin" entered, and "Password" which is empty. A "Log In" button is to the right of the password field.

Select [Manual Internet Connection Setup] under [SETUP] > [INTERNET]

A screenshot of the D-Link router's web interface. At the top, it says "Product Page : DWR-113" and "Firmware Version : V1.00b02". The D-Link logo is prominent. Below the logo is a navigation menu with "DWR-113" and "SETUP" (highlighted with a red box). Under "SETUP", there are tabs for "ADVANCED", "TOOLS", "STATUS", and "SUPPORT". The "INTERNET" tab is selected and highlighted with a red box. The main content area is titled "INTERNET CONNECTION" and contains the following text: "There are two ways to set up your Internet connection: you can use the Web-based Internet Connection Setup Wizard, or you can manually configure the connection." Below this is a section titled "INTERNET CONNECTION SETUP WIZARD" with a button labeled "Internet Connection Setup Wizard". A note follows: "Note : Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package." Below that is a section titled "MANUAL INTERNET CONNECTION OPTIONS" with a button labeled "Manual Internet Connection Setup" (highlighted with a red box). On the right side, there is a "Helpful Hints.." section with two bullet points and a "More..." link.

- Select [Manual] for Dial-Up Profile
 - Select Country [Australia]
 - Telecom [Virgin Mobile]
 - Username change to [guest]
 - Password change to [guest]
 - Authentication select [PAP]
 - APN is [virginbroadband]
 - Reconnect Mode select [Auto]
 - Keep Alive choose [Use LCP Echo Request]
- Click on [Save Settings] button to apply the changes.

3G/4G INTERNET CONNECTION TYPE

Enter the information provided by your Internet Service Provider (ISP).

Dial-Up Profile : Auto-Detection Manual

Country :

Telecom :

3G/4G Network :

Username : (optional)

Password : (optional)

Verify Password : (optional)

Dialed Number :

Authentication :

APN : (optional)

Pin Code :

Reconnect Mode : Auto Manual

Maximum Idle Time : seconds

Primary DNS Server :

Secondary DNS Server :

Keep Alive : Disable Use LCP Echo Request

lcp-echo-interval : seconds

lcp-echo-failure : times

Bridge ethernet ports : Enable

Save Settings

Don't Save Settings