

Default IP: 192.168.1.1

Username: admin

Password: admin

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75


**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

## System Overview

**DSA-3600**

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
  - Authentication
  - Black List
  - Policy
  - Additional Control
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status**
  - System
  - Interface
  - Online Users
  - User Logs
  - E-mail & SYSLOG



**System**

System Time	2000/02/24 15:26:51 +0800
Up Time	16 min
F/W Version	<a href="#">1.00.00</a>

**Access Points**

Total Managed	<a href="#">0</a>
Down	<a href="#">0</a>
Associated Clients	0

**Network Interfaces**

	IP Address	Status
<a href="#">WAN1</a>	N/A	Down
<a href="#">WAN2</a>	N/A	Down

	IP Address	SSID	Status
<a href="#">Default</a>	192.168.1.1	dlink	Enabled
<a href="#">SZ1</a>	192.168.2.1	dlink-SZ1	Disabled
<a href="#">SZ2</a>	192.168.3.1	dlink-SZ2	Disabled
<a href="#">SZ3</a>	192.168.4.1	dlink-SZ3	Disabled
<a href="#">SZ4</a>	192.168.5.1	dlink-SZ4	Disabled

**Users**

Total Online	<a href="#">0</a>
<a href="#">Guests</a>	0

**VPN Sessions**

<a href="#">Local VPN</a>	0
<a href="#">Remote VPN</a>	0

Refresh every  seconds

10  
20  
30  
40  
50  
**60**

Internet

**D-Link DSA-3600** Multi-Service Business Gateway

admin - 192.168.1.75

## System Overview

### System

System Time	2000/02/24 15:27:54 +0800
Up Time	17 min
F/W Version	<a href="#">1.00.00</a>

### Access Points

Total Managed	<a href="#">0</a>
Down	<a href="#">0</a>
Associated Clients	0

### Network Interfaces

	IP Address	Status
<a href="#">WAN1</a>	N/A	↓ Down
<a href="#">WAN2</a>	N/A	↓ Down

### Users

Total Online	<a href="#">0</a>
<a href="#">Guests</a>	0

### VPN Sessions

<a href="#">Local VPN</a>	0
<a href="#">Remote VPN</a>	0

Refresh every  seconds

### Status

IP Address	SSID	Status
<a href="#">Default</a>	192.168.1.1	dlink Enabled
<a href="#">SZ1</a>	192.168.2.1	dlink-SZ1 Disabled
<a href="#">SZ2</a>	192.168.3.1	dlink-SZ2 Disabled
<a href="#">SZ3</a>	192.168.4.1	dlink-SZ3 Disabled
<a href="#">SZ4</a>	192.168.5.1	dlink-SZ4 Disabled

The screenshot displays the D-Link DSA-3600 Multi-Service Business Gateway Setup Wizard in a Microsoft Internet Explorer browser window. The browser's title bar reads "D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia". The address bar shows the URL "http://192.168.1.1/first.shtml".

The web page features a blue header with the D-Link logo and the tagline "Building Networks for People". The user is logged in as "admin - 192.168.1.75". The page title is "DSA-3600 Multi-Service Business Gateway".

The main content area is titled "Setup Wizard" and shows "Step 1: General". The instructions for Step 1 state: "It is recommended to change administrator's password and select the appropriate time zone before setting up the system." The form includes the following fields:

- New Password:** A text input field with masked characters (dots).
- Verify Password:** A text input field with masked characters (dots).
- Time Zone:** A dropdown menu currently set to "(GMT+10:00) Canberra, Melbourne, Sydney".

Navigation buttons are present: "Step 2", "Step 3", "Step 4", "Next" (with a checkmark icon), and "Exit" (with an 'X' icon).

A left sidebar contains a tree view of configuration options:

- Tools
  - Setup Wizard
  - Password Change
  - Backup & Restore
  - System Upgrade
  - Restart
  - Wake-On-LAN
  - Quick Links
- LAN Port Mapping
- Service Zones
- Users
  - Authentication
  - Black List
  - Policy
  - Additional Control
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware Upgrade
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status
  - System
  - Interface
  - Online Users
  - User Logs
  - E-mail & SYSLOG

At the bottom left, there is a small image of the DSA-3600 device. The browser's status bar at the bottom shows "Done" and "Internet".

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

HelpLogout

Tools

Setup Wizard

Password Change

Backup & Restore

System Upgrade

Restart

Wake-On-LAN

Quick Links

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

NAT

Privilege

Monitor IP

Walled Garden

Proxy Server

DDNS

Client Mobility

VPN

Status


System

Interface

Online Users

User Logs

E-mail & SYSLOG



Step 1

**Step 2**

Step 3

Step 4

Exit

Please select connection type of the WAN1 interface and configure the settings.

Static (Use the following IP settings)

IP Address:

Subnet Mask:

Default Gateway:

DNS Server:

192.203.230.10

Dynamic (IP settings assigned automatically.)

PPPoE

Back

Next

DoneInternet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

HelpLogout

Tools

Setup Wizard

Password Change

Backup & Restore

System Upgrade

Restart

Wake-On-LAN

Quick Links

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

NAT

Privilege

Monitor IP

Walled Garden

Proxy Server

DDNS

Client Mobility

VPN

Status


System

Interface

Online Users

User Logs

E-mail & SYSLOG



Step 1

**Step 2**

Step 3

Step 4

Exit

**Setup Wizard**

**WAN1 Interface**

Static (Use the following IP settings)

Dynamic (IP settings assigned automatically.)

☒ PPPoE


Username:


Password:

Back

Next

Internet

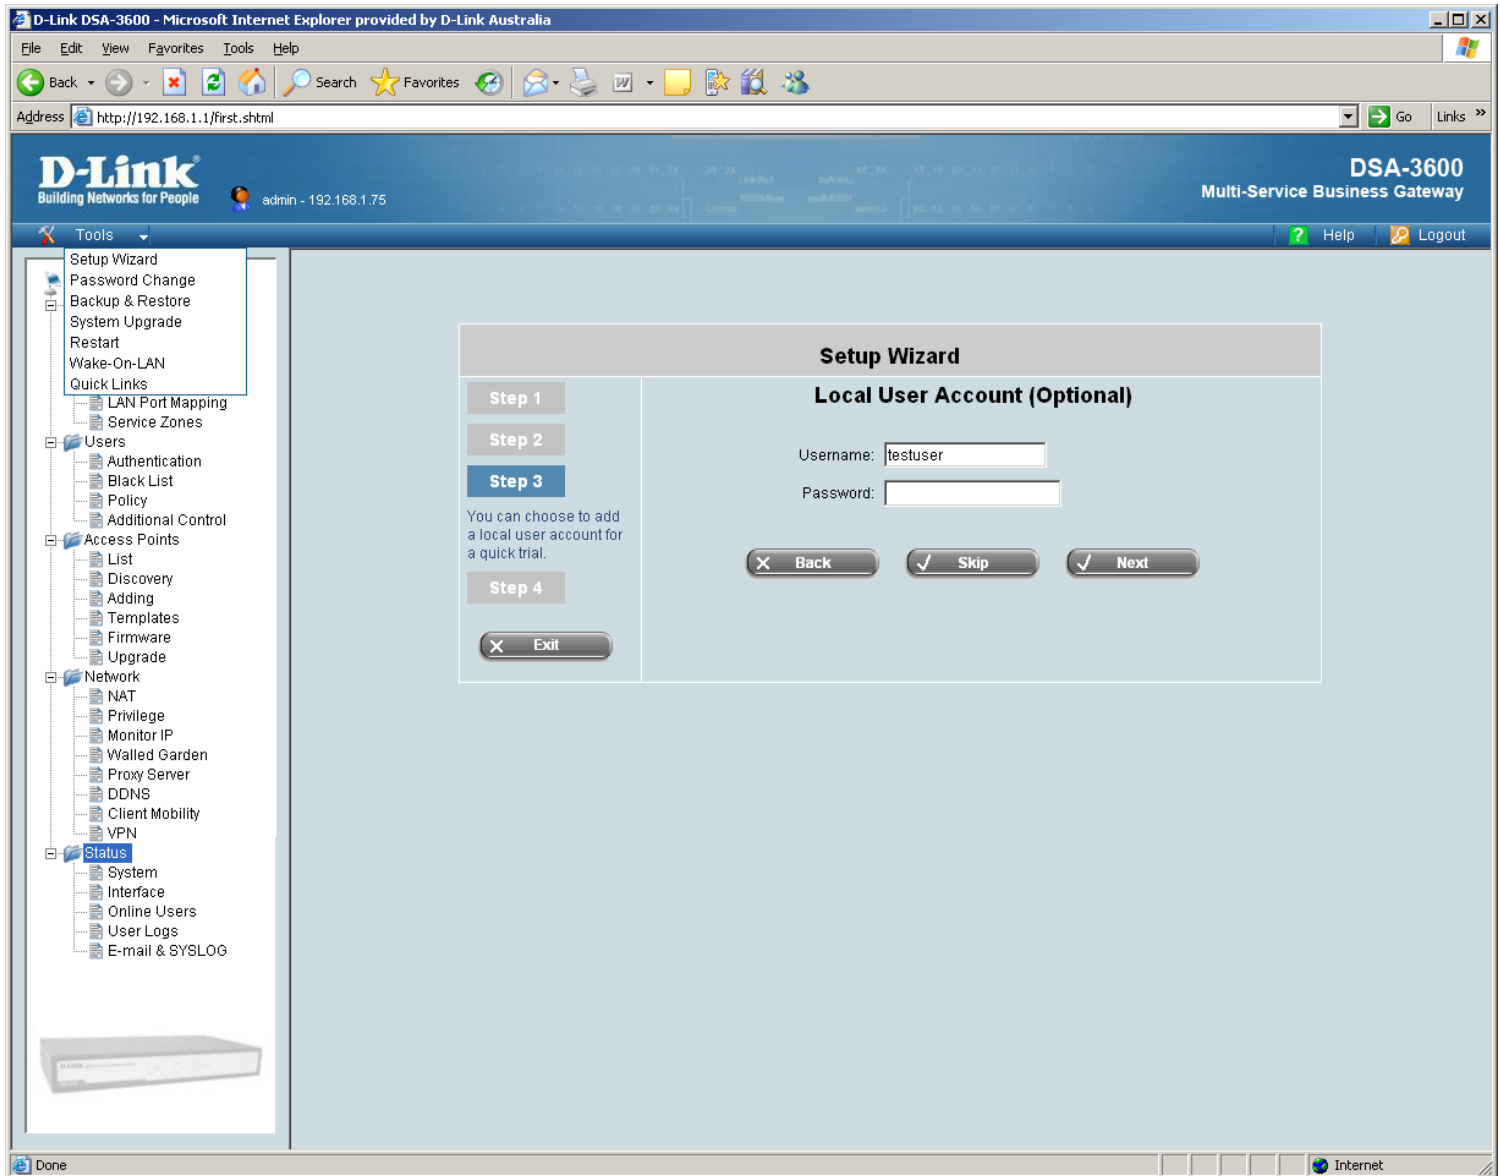

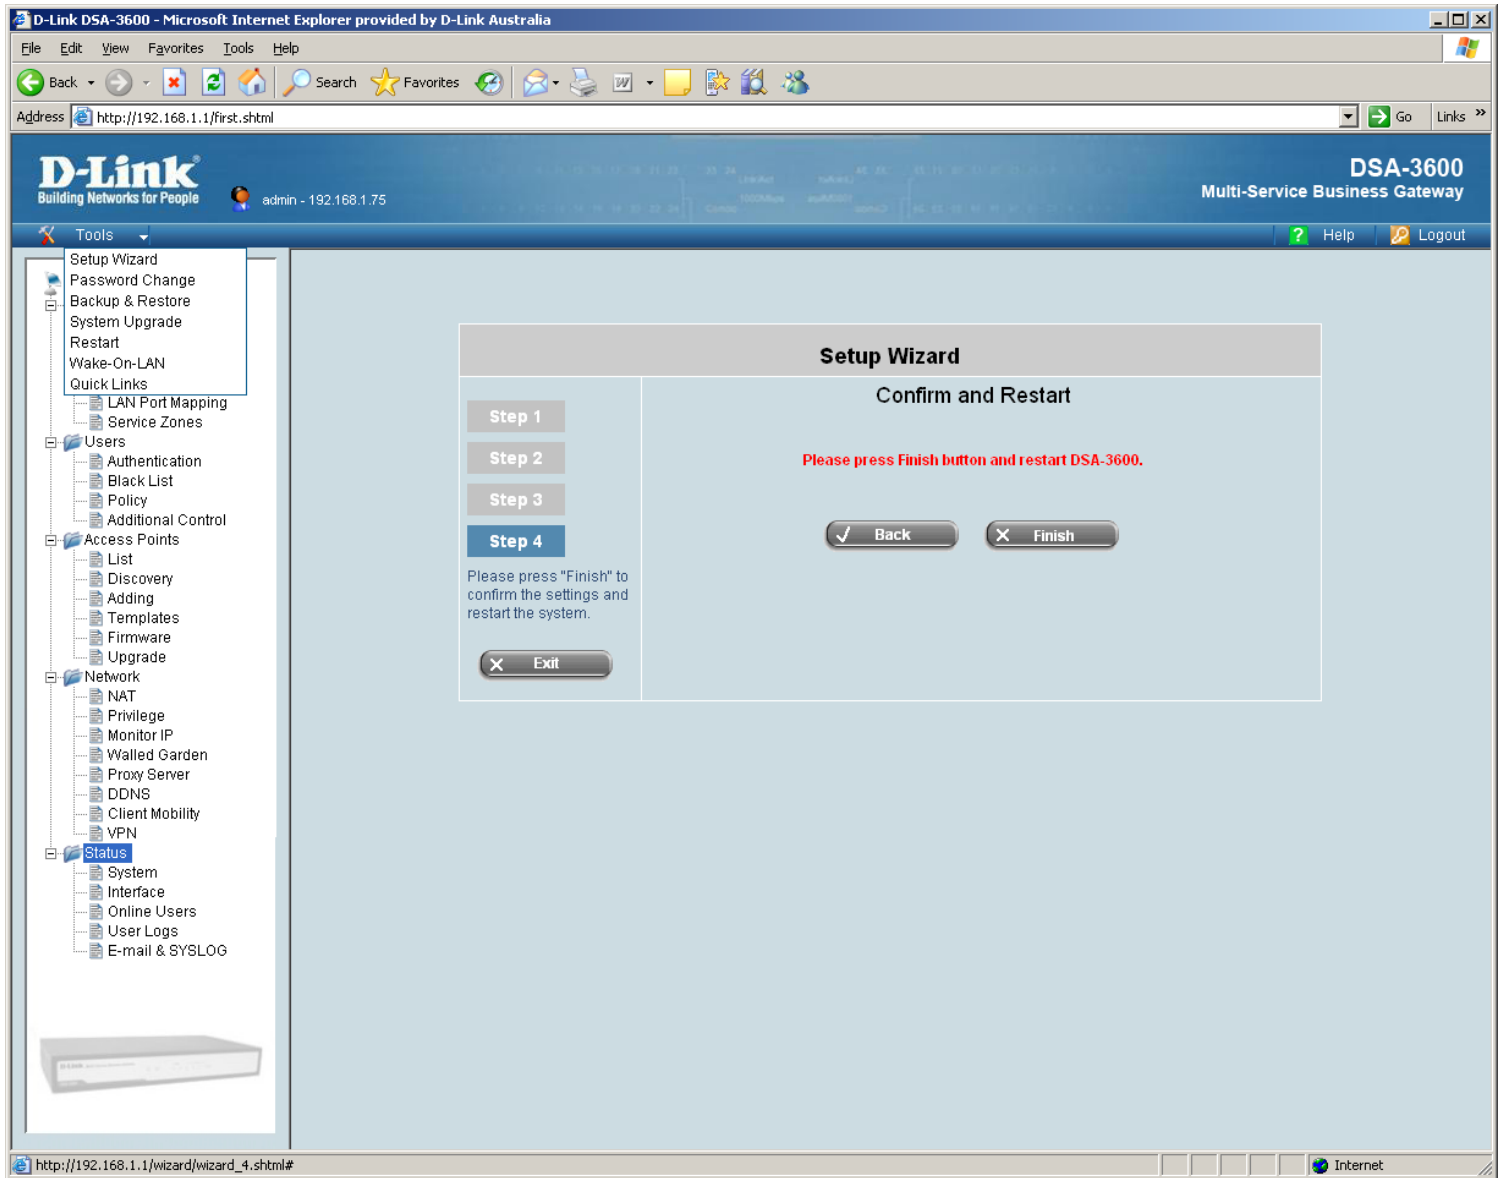

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
    - General**
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones
  - Users
  - Access Points
  - Network
  - Status



**General Settings For The Entire System**

System Name	DSA-3600
Internal Domain Name	<input type="text"/> <small>(FQDN of this device for internal use, e.g. controller.office-name.com)</small>
Homepage Redirect URL	<input checked="" type="radio"/> Enable <input type="radio"/> Disable <input type="text" value="http://www.dlink-intl.com/"/> <small>*(e.g. http://www.dlink-intl.com/)</small>
User Log Access IP Address	<input type="text"/> <small>(e.g. 192.168.2.1)</small>
Management IP Address List	<a href="#">Setup Management IP Address List</a>
SNMP	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
HTTPS Protected Login	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Time	<p>System Time : 2000/02/24 15:41:26</p> <p>Time Zone : <input type="text" value="(GMT+10:00) Canberra, Melbourne, Sydney"/></p> <p><input checked="" type="radio"/> NTP</p> <p>NTP Server 1: <input type="text" value="tock.usno.navy.mil"/> <small>*(e.g. tock.usno.navy.mil)</small></p> <p>NTP Server 2: <input type="text" value="ntp1.fau.de"/></p> <p>NTP Server 3: <input type="text" value="clock.cuhk.edu.hk"/></p> <p>NTP Server 4: <input type="text" value="ntp1.pads.ufjf.br"/></p> <p>NTP Server 5: <input type="text" value="ntp1.cs.mu.OZAU"/></p> <p><input type="radio"/> Manually set up</p>

Apply Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

- General
- WAN1
- WAN2
- WAN Traffic
- LAN Port Mapping
- Service Zones

Users

Access Points

Network

Status

DSA-3600

Multi-Service Business Gateway

Management IP Address List

No.	IP Address/Segment	No.	IP Address/Segment
1	192.168.1.0/24	2	
3		4	
5		6	
7		8	
9		10	
11		12	
13		14	
15		16	
17		18	
19		20	

Apply

Clear

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping


Service Zones

Users

Access Points

Network

Status



WAN1 Interface Setting

WAN1

☒ Static (Use the following IP settings)

IP Address:

202.129.109.82

Subnet Mask:

255.255.255.224

Default Gateway:

202.129.109.65

Preferred DNS Server:

61.88.88.88

Alternate DNS Server:

☐ Dynamic (IP settings assigned automatically)

☐ PPPoE

☐ PPTP

Apply

Cancel

Done

Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

**WAN1 Interface Setting**

**WAN1**

☐ Static (Use the following IP settings)  
☐ Dynamic (IP settings assigned automatically)  
☒ PPPoE

Username:

Password:


MTU:  bytes (Range:1000~1492)\*

Clamp MSS:  bytes (Range:980~1400)\*

Dial on Demand: ☐ Enable ☒ Disable

☐ PPTP

Apply Cancel



Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

- General
- WAN1
- WAN2
- WAN Traffic
- LAN Port Mapping
- Service Zones

Users

Access Points

Network

Status

WAN1 Interface Setting

WAN1

☐ Static (Use the following IP settings)

☐ Dynamic (IP settings assigned automatically)

☐ PPPoE

☒ PPTP

Type

☐ Static

☒ DHCP

PPTP Server IP Address:

Username:

Password:

PPTP Connection ID/Name:

Dial on Demand:

☒ Enable

☐ Disable

Maximum Idle Time: minutes

Apply

Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
- Access Points
- Network
- Status

WAN2 Interface & WAN Failover Settings

WAN2

☒ None

☐ Static (Use the following IP settings)

☐ Dynamic (IP settings assigned automatically)

☐ PPPoE

Apply

Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping


Service Zones

Users

Access Points

Network

Status



WAN2

WAN2 Interface & WAN Failover Settings

☐ None

☒ Static (Use the following IP settings)

☐ Dynamic (IP settings assigned automatically)

☐ PPPoE

IP Address:

Subnet Mask:

Default Gateway:

Preferred DNS Server:

Alternate DNS Server:

Apply

Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

WAN2 Interface & WAN Failover Settings

WAN2

None

Static (Use the following IP settings)

Dynamic (IP settings assigned automatically)

Renew

PPPoE

Apply

Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

WAN2 Interface & WAN Failover Settings

WAN2

☐ None

☐ Static (Use the following IP settings)

☐ Dynamic (IP settings assigned automatically)

☒ PPPoE

Username:

Password:

MTU:

1492

bytes (range:1000~1492)\*

Clamp MSS:

1400

bytes (range:980~1400)\*

Dial on Demand

☐ Enabled☒ Disabled

Apply

Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

WAN Traffic Settings

Available Bandwidth on WAN Interface

Uplink:100000Kbps \*(Range: 10-100000)

Downlink:100000Kbps \*(Range: 10-100000)

WAN Failover & Connection Detection

Target URLs for detecting Internet connection:  
URL1: http://  
URL2: http://  
URL3: http://  
☒ Enable WAN Failover  
☐ Fail back to WAN1 when WAN1 is available again  
☒ Warning of Internet Disconnection  
When Internet connection is down, the system will display the message as:  
Sorry! The service is temporarily unavailable.

Apply

Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
- Access Points
- Network
- Status

LAN Ports and Service Zone Mapping

Select the mode for Service Zone

☒ Port-Based☐ Tag-Based

Specify a desired Service Zone for each LAN Port:

Default

Default

Default

Default

SZ1

SZ2

SZ3

SZ4

LAN2

LAN3

LAN4

✓ Apply

✗ Clear

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools

HelpLogout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

LAN Ports and Service Zone Mapping

Select the mode for Service Zone

Port-Based

Tag-Based

Notice: Under "Tag-Based" mode, Service Zones will be distinguished by VLAN tagging, instead of physical LAN ports.

Default

Default

Default

Default

LAN1

LAN2

LAN3

LAN4

Apply

Clear

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrint

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
- Access Points
- Network
- Status

Service Zone Settings

Service Zone Name	VLAN Tag	SSID	Encryption	Applied Policy	Authentication	Status	Details
Default	--	dlink	Open System	None	Disabled	Enabled	Configure
SZ1	1	dlink-SZ1	Open System	None	Server 1	Disabled	Configure
SZ2	2	dlink-SZ2	Open System	None	Server 1	Disabled	Configure
SZ3	3	dlink-SZ3	Open System	None	Server 1	Disabled	Configure
SZ4	4	dlink-SZ4	Open System	None	Server 1	Disabled	Configure

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

**DSA-3600**

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
- Network
- Status

**Basic Settings**

<b>Service Zone Status</b>	Enabled
<b>Service Zone Name</b>	Default
<b>Network Interface</b>	<p>Operation Mode: <input checked="" type="radio"/> NAT <input type="radio"/> Router</p> <p>IP Address: 192.168.1.1</p> <p>Subnet Mask: 255.255.255.0</p>
<b>DHCP Server</b>	<p><input type="radio"/> Disable DHCP Server <input checked="" type="radio"/> Enable DHCP Server</p> <p>Start IP Address: 192.168.1.2</p> <p>End IP Address: 192.168.1.100</p> <p>Preferred DNS Server:</p> <p>Alternate DNS Server:</p> <p>Domain Name: dlink.com</p> <p>WINS Server:</p> <p>Lease Time: 1 Day</p> <p><a href="#">Reserved IP Address List</a></p> <p><input type="radio"/> Enable DHCP Relay</p>

**Authentication Settings**

<b>Authentication Required For the Zone</b>	<input type="radio"/> Enabled <input checked="" type="radio"/> Disabled			
<b>Auth Option</b>	<b>Auth Database</b>	<b>Postfix</b>	<b>Default</b>	<b>Enabled</b>
<a href="#">Server 1</a>	LOCAL	local	<input checked="" type="radio"/>	<input checked="" type="checkbox"/>

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
- Network
- Status

Enable DHCP Relay

**Authentication Settings**

Authentication Required For the Zone ☐ Enabled ☒ Disabled

Auth Option	Auth Database	Postfix	Default	Enabled
<a href="#">Server 1</a>	LOCAL	local	<input checked="" type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Server 2</a>	POP3	pop3	<input type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Server 3</a>	RADIUS	radius	<input type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Server 4</a>	LDAP	ldap	<input type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Guest Users</a>	ONDEMAND	guest	<input type="radio"/>	<input checked="" type="checkbox"/>

**Authentication Options**

<b>Custom Pages</b>	<b>Login Page</b>	<a href="#">Configure</a>
	<b>Logout Page</b>	<a href="#">Configure</a>
	<b>Login Success Page</b>	<a href="#">Configure</a>
	<b>Login Success Page for Instant Account</b>	<a href="#">Configure</a>
	<b>Logout Success Page</b>	<a href="#">Configure</a>

**Default Policy in this Service Zone** Policy 1 [Edit System Policies](#)

**Email Message for Login Reminding** None [Edit Mail Message](#)

**Wireless Settings**

<b>SSID</b>	dlink
<b>Security</b>	<b>Authentication</b> Open System
	<input type="checkbox"/> Enable 802.1X Authentication

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
    - General
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones**
  - Users
  - Access Points
  - Network
  - Status

**Custom Pages**

<b>Login Page</b>	Configure
<b>Logout Page</b>	Configure
<b>Login Success Page</b>	Configure
<b>Login Success Page for Instant Account</b>	Configure
<b>Logout Success Page</b>	Configure

**Default Policy in this Service Zone** None Edit System Policies

**Email Message for Login Reminding** Edit Mail Message

**Wireless Settings**

<b>SSID</b>	dlink		
<b>Security</b>	<b>Authentication</b>	Open System	
	<input type="checkbox"/> Enable 802.1X Authentication		
	<b>Encryption</b>	None	

**Managed AP(s) in this Service Zone**

AP Type	AP Name	IP Address	Status
		MAC Address	

✓ Apply ✕ Clear

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
    - General
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones**
  - Users
  - Access Points
  - Network
  - Status

**Logout Success Page** [Configure](#)

Default Policy in this Service Zone Policy 5 [Edit System Policies](#)

Email Message for Login Reminding [Edit Mail Message](#)

**Wireless Settings**

SSID	dlink		
Security	Authentication	Shared Key	
	Encryption	WEP	
		Key Length	128 bits
		Key Format	Hex
		Key Index	Key1
		Key1	
Key2			
Key3			
Key4			

**Managed AP(s) in this Service Zone**

AP Type	AP Name	IP Address	Status
		MAC Address	

[Apply](#) [Clear](#)

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
    - General
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones**
  - Users
  - Access Points
  - Network
  - Status

**Custom Pages**

	Login Page	Configure
	Logout Page	Configure
	Login Success Page	Configure
	Login Success Page for Instant Account	Configure
	Logout Success Page	Configure

Default Policy in this Service Zone: Policy 5 [Edit System Policies](#)

Email Message for Login Reminding: [Edit Mail Message](#)

**Wireless Settings**

SSID	dlink		
Security	Authentication	WPA	
	Encryption	WPA-PSK	
		WPA-PSK	
	WPA-RADIUS		Hex
	Passphrase		

**Managed AP(s) in this Service Zone**

AP Type	AP Name	IP Address	Status
		MAC Address	

[Apply](#) [Clear](#)

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

**Service Zones**

- DSA-3600
  - System
    - General
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones**
  - Users
  - Access Points
  - Network
  - Status

**Custom Pages**

<b>Logout Page</b>	Configure
<b>Login Success Page</b>	Configure
<b>Login Success Page for Instant Account</b>	Configure
<b>Logout Success Page</b>	Configure

**Default Policy in this Service Zone** Policy 5 [Edit System Policies](#)

**Email Message for Login Reminding** [Edit Mail Message](#)


**Wireless Settings**

<b>SSID</b>	dlink		
<b>Security</b>	<b>Authentication</b>	WPA	
	<b>Encryption</b>	WPA-RADIUS	
		<b>RADIUS Server Settings (802.1X)</b>	
		IP Address	
	Port		
	Secret Key		

**Managed AP(s) in this Service Zone**

AP Type	AP Name	IP Address	Status
		MAC Address	

[Apply](#) [Clear](#)



Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
    - General
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones**
  - Users
  - Access Points
  - Network
  - Status



**Login Page Selection for Users - Service Zone: Default**

☐ Default Page ☒ Template Page

☐ Uploaded Page ☐ External Page

**Template Page Setting**

Color for Title Background	<input type="text"/> <a href="#">Select</a> (RGB values in hex mode)
Color for Title Text	<input type="text"/> <a href="#">Select</a> (RGB values in hex mode)
Color for Page Background	<input type="text"/> <a href="#">Select</a> (RGB values in hex mode)
Color for Page Text	<input type="text"/> <a href="#">Select</a> (RGB values in hex mode)
Title	<input type="text" value="User Login Page"/>
Welcome	<input type="text" value="Welcome To User Login Page"/>
Information	<input type="text" value="Please Enter Your Name and Password to Sign In"/>
Username	<input type="text" value="Username"/>
Password	<input type="text" value="Password"/>
Submit	<input type="text" value="Submit"/>
Cancel	<input type="text" value="Clear"/>
Copyright	<input type="text" value="Copyright (c)"/>

Preview

✓ Apply ✕ Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

Login Page Selection for Users - Service Zone: Default

Default Page

Template Page

Uploaded Page

External Page

Uploaded Page Setting

File Name

Browse...

Submit

Existing Image Files:

Total Capacity: 512 K

Now Used: 0 K

Upload Image Files

Upload Images


Browse...

Submit

[Preview](#)

✓ Apply

✗ Cancel



Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
- Network
- Status



**Login Page Selection for Users - Service Zone: Default**

<input type="radio"/> Default Page	<input type="radio"/> Template Page
<input type="radio"/> Uploaded Page	<input checked="" type="radio"/> External Page

**External Page Setting**

External URL	<input type="text" value="http://"/>
<input type="button" value="Preview"/>	

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

D-Link

Upload Logout Page - Service Zone: Default

File Name

Browse...

Submit

Use Default Page

Existing Image Files:

Total Capacity: 512 K

Now Used: 0 K

Upload Image Files - Service Zone: Default

Upload Images

Browse...

Submit

[Preview](#)

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

Policy Configuration

Select Policy:

Global

Firewall Profile

Setting

Specific Route Profile

Setting

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

Network

Status

D-Link

Policy Configuration

Select Policy:	Policy 1
Firewall Profile	Setting
Specific Route Profile	Setting
Schedule Profile	Setting
QoS Profile	Setting
Privilege Profile	Setting

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

Status

Policy 1 - Firewall Configuration

Predefined and Custom Service Protocols

Firewall Rules

Internet Explorer

http://192.168.1.1/UserAuthentication/FirewallService.shtml?id=1

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print W Yellow Star Bookmarks People

Address http://192.168.1.1/first.shtml Go Links »

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

**Policy 1 - Service Protocols List**

No.	Name	Description	Select All
1	ALL	ALL	<input type="checkbox"/>
2	ALL TCP	TCP, Source Port: 0~65535, Destination Port: 0~65535	<input type="checkbox"/>
3	ALL UDP	UDP, Source Port: 0~65535, Destination Port: 0~65535	<input type="checkbox"/>
4	ALL ICMP	ICMP, Type: Any, Code: Any	<input type="checkbox"/>
5	FTP	TCP/UDP, Destination Port: 20;21	<input type="checkbox"/>
6	HTTP	TCP/UDP, Destination Port: 80	<input type="checkbox"/>
7	HTTPS	TCP/UDP, Destination Port: 443	<input type="checkbox"/>
8	POP3	TCP, Destination Port: 110	<input type="checkbox"/>
9	SMTP	TCP, Destination Port: 25	<input type="checkbox"/>
10	DHCP	UDP, Destination Port: 67;68	<input type="checkbox"/>

Add Delete

(Total: 27) [First](#) [Prev](#) [Next](#) [Last](#)

Done Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links »

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status



**Policy 1 - Service Protocols List**

No.	Name	Description	Select All
21	Net-Meeting	TCP; Destination Port: 1720	<input type="checkbox"/>
22	NTP	TCP/UDP; Destination Port: 123	<input type="checkbox"/>
23	PING	ICMP; Type: 8, Code: Any	<input type="checkbox"/>
24	TIMESTAMP	ICMP; Type: 13, Code: Any	<input type="checkbox"/>
25	RLOGIN	TCP; Destination Port: 513	<input type="checkbox"/>
26	SSH	TCP; Destination Port: 22	<input type="checkbox"/>
27	TFTP	UDP; Destination Port: 69	<input type="checkbox"/>

Add Delete

(Total: 27) [First](#) [Prev](#) [Next](#) [Last](#)

<http://192.168.1.1> - D-Link DSA-3600 - Microsoft Internet Explorer pro...

**Add Service Protocol**

Name	<input type="text"/>
Protocol Type	TCP
Source Port	<input type="text"/> 1 ~ <input type="text"/> 65535
Destination Port	<input type="text"/> 1 ~ <input type="text"/> 65535

✓ Apply X Cancel

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

**Policy 1 - Specific Default Route**

Enable ☐ Default Gateway: IP Address

WAN1 Default Gateway  
WAN2 Default Gateway  
IP Address

**Routes**

Route No.	Destination		Gateway
	IP Address	Subnet Netmask	IP Address
1	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
2	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
3	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
4	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
5	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
6	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
7	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
8	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
9	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
10	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>

✓ Apply ✕ Cancel

DSA-3600

System

- General
- WAN1
- WAN2
- WAN Traffic
- LAN Port Mapping
- Service Zones

Users

- Access Points
- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

- Status

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

**Policy 1 - Specific Default Route**

Enable ☐ Default Gateway: IP Address

**Policy 1 - Specific Routes**

Route No.	Destination		Gateway
	IP Address	Subnet Netmask	IP Address
1	<input type="text"/>	255.255.255.255 (/32)	<input type="text"/>
2	<input type="text"/>	255.255.255.254 (/31)	<input type="text"/>
3	<input type="text"/>	255.255.255.252 (/30)	<input type="text"/>
4	<input type="text"/>	255.255.255.248 (/29)	<input type="text"/>
5	<input type="text"/>	255.255.255.240 (/28)	<input type="text"/>
6	<input type="text"/>	255.255.255.224 (/27)	<input type="text"/>
7	<input type="text"/>	255.255.255.192 (/26)	<input type="text"/>
8	<input type="text"/>	255.255.255.128 (/25)	<input type="text"/>
9	<input type="text"/>	255.255.255.0 (/24)	<input type="text"/>
10	<input type="text"/>	255.255.254.0 (/23)	<input type="text"/>
		255.255.252.0 (/22)	<input type="text"/>
		255.255.255.255 (/32)	<input type="text"/>
		255.255.255.255 (/32)	<input type="text"/>
		255.255.255.255 (/32)	<input type="text"/>
		255.255.255.255 (/32)	<input type="text"/>
		255.255.255.255 (/32)	<input type="text"/>

✓ Apply ✕ Cancel

Done Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail News RSS Feeds

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status



**Policy 1 - Traffic Configuration**

Traffic Class
Voice
Video
Best Effort
Background

ty X Clear

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

**DSA-3600**

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

**Policy 1 - Traffic Configuration**

Traffic Class	Best Effort
Total Downlink	Unlimited
Individual Maximum Downlink	Unlimited
Individual Request Downlink	None
Total Uplink	Unlimited
Individual Maximum Uplink	Unlimited
Individual Request Uplink	None

✓ Apply ✕ Clear

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones**
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status



**Policy 1 - Traffic Configuration**

Traffic Class	Background
Total Downlink	Unlimited
Individual Maximum Downlink	Unlimited
Individual Request Downlink	None
Total Uplink	Unlimited
Individual Maximum Uplink	Unlimited
Individual Request Uplink	None

✓ Apply ✕ Clear

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

Status

Policy 1 - Privilege Configuration

PPTP login	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Instant Account Privilege	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Change Password Privilege	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

✓ Apply

✕ Clear

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

HelpLogout

DSA-3600

System

General

System

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List


Policy

Additional Control

Access Points

Network

Status



Users

Authentication	The internal or external account databases include Local, POP3, RADIUS, LDAP, NT Domain, and On-demand. The administrator needs to activate and configure at least one of these authentication databases. Postfix is used for the system to identify which authentication option will be used for the specific user account when multiple options are concurrently in use. One of the authentication options can be set as default, so that end users can choose NOT to type the complete account name (id@postfix) when logging in.
Black List	5 sets of black list profiles can be defined. Each active authentication option may be configured with one of these 5 black list profiles.
Policy	8 sets of policy profiles can be defined and used to enforce the access control for different groups of users.
Additional Control	<p>Additional settings in this section will enable the administrator to control the user sessions, such as idle timeout, multiple login, Logout upon closing the "Login Success" window, etc.</p> <p>Also, it is possible to customize the web pages for the entire login &amp; logout processes, as well as a POP3 email message to notify users to login before accessing the network.</p> <p>In addition, the special MAC ACL (Access Control List) is used to manage which client devices are allowed to access the login page.</p>

http://192.168.1.1/SystemConfiguration/main.shtmlInternet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

Network

Status

Authentication Settings

Auth Option	Auth Database	Postfix
<a href="#">Server 1</a>	LOCAL	local
<a href="#">Server 2</a>	POP3	pop3
<a href="#">Server 3</a>	RADIUS	radius
<a href="#">Server 4</a>	LDAP	ldap
<a href="#">Guest Users</a>	ONDEMAND	guest

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
  - Authentication**
  - Black List
  - Policy
  - Additional Control
- Access Points
- Network
- Status



### Authentication Option - Server 1

Name	Server 1	
Postfix	local	
Black List	None	
Authentication Database	Local	Configure

✓ Apply ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail New Window Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

**Local User Database Settings**

[Local User List](#)

<b>Account Roaming Out</b>	<input checked="" type="radio"/> Enable <input type="radio"/> Disable (Local user database will be used as authentication database for roaming out users.)
<b>802.1X Authentication</b>	<input type="radio"/> Enable <input checked="" type="radio"/> Disable (Local user database will be used as internal RADIUS database for 802.1X-enabled LAN devices, such as AP and switch.)

[Roaming Out & 802.1X Client Device Settings](#)

✓ Apply ✕ Cancel

DSA-3600

System

- General
- WAN1
- WAN2
- WAN Traffic
- LAN Port Mapping
- Service Zones

Users

- Authentication**
- Black List
- Policy
- Additional Control

Access Points

Network

Status

Done Internet

The screenshot shows the D-Link DSA-3600 Multi-Service Business Gateway web interface. The browser is Microsoft Internet Explorer. The page has a blue header with the D-Link logo and the product name. The left sidebar contains a tree view with the following items: System, Users, Access Points, Network, and Status. The main content area displays the 'Local User List' table. The table has the following columns: Username, Password, MAC Address, Applied Policy, Local VPN Enabled, Remark, and a Del All button. The table contains one entry for 'testuser' with password 'test'. Navigation links (First, Previous, Next, Last) are at the bottom of the table.

Local User List						
Username	Password	MAC Address	Applied Policy	Del All	Remark	
			Local VPN Enabled			
<a href="#">testuser</a>	test		None			
			No			<a href="#">Delete</a>

(Total:1) [First](#) [Previous](#) [Next](#) [Last](#)

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
  - Authentication
  - Black List
  - Policy
  - Additional Control
- Access Points
- Network
- Status



### Adding User(s) To the List

No.	Username	Password	MAC Address (xx:xx:xx:xx:xx:xx)	Policy	Remark	Enable Local VPN
1	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
2	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
3	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
4	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
5	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
6	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
7	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
8	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
9	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>
10	<input type="text"/>	<input type="password"/>	<input type="text"/>	None	<input type="text"/>	<input type="checkbox"/>

✓ Apply    ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

Network

Status

Note 1: The format of each line in the file is "Username, Password, MAC Address, Applied Policy, Remark, Local VPN Enabled" without quotes. There must be no space between the fields and commas. The MAC Address field could be omitted but the trailing comma must be retained. When adding user accounts by uploading a file, existing accounts in the embedded database that are also defined in the data file will not be replaced by the new ones.

Note 2: If users need to use Local VPN, please set Local VPN Enabled field to 1.

Upload User From File

File Name

Browse...

Upload

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

Network

Status

Download User To File

Username	Password	MAC Address	Applied Policy
			Local VPN Enabled
			Remark
testuser	test		0
			0

Download

Done

Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
  - Authentication**
  - Black List
  - Policy
  - Additional Control
- Access Points
- Network
- Status



### Guest Account Configuration

Postfix	<input type="text" value="guest"/>	<small>*(e.g. guest. Max: 40 char)</small>
Receipt Header 1	<input type="text" value="Welcome!"/>	<small>(e.g. Welcome!)</small>
Receipt Header 2	<input type="text"/>	
Receipt Footer	<input type="text" value="Thank You!"/>	<small>(e.g. Thank You!)</small>
Policy Name	<input type="text" value="Policy 1"/>	
WLAN ESSID	<input type="text" value="dlink"/>	<small>(e.g. guest)</small>
Wireless Key	<input type="text"/>	
Remark	<input type="text"/>	

[Users List](#) [Plan Configuration](#) [Generate Guest Account User](#)

Internet



The screenshot displays the D-Link DSA-3600 configuration interface. The main content area is titled 'Guest Account Plan Configuration' and contains a table with the following data:

Plan	Status	Time Volume	1st Login Expiration Time
1	<input checked="" type="radio"/> Enabled <input type="radio"/> Disabled	2 hours 0 mins	8 hours
2	<input type="radio"/> Enabled <input checked="" type="radio"/> Disabled	1 hours 0 mins	1 hours

Below the table are two buttons: 'Apply' and 'Cancel'. The left sidebar shows a tree view with 'Authentication' selected. The top status bar indicates the user is 'admin' at IP '192.168.1.75'.

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout


DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
  - Users
    - Authentication**
    - Black List
    - Policy
    - Additional Control
  - Access Points
  - Network
  - Status

**Generate Guest Account User**

Plan	Type	Status	Function
1	2 hrs 0 mins	Enabled	<a href="#">Generate</a>
2	N/A	Disabled	<a href="#">Generate</a>

Done Internet

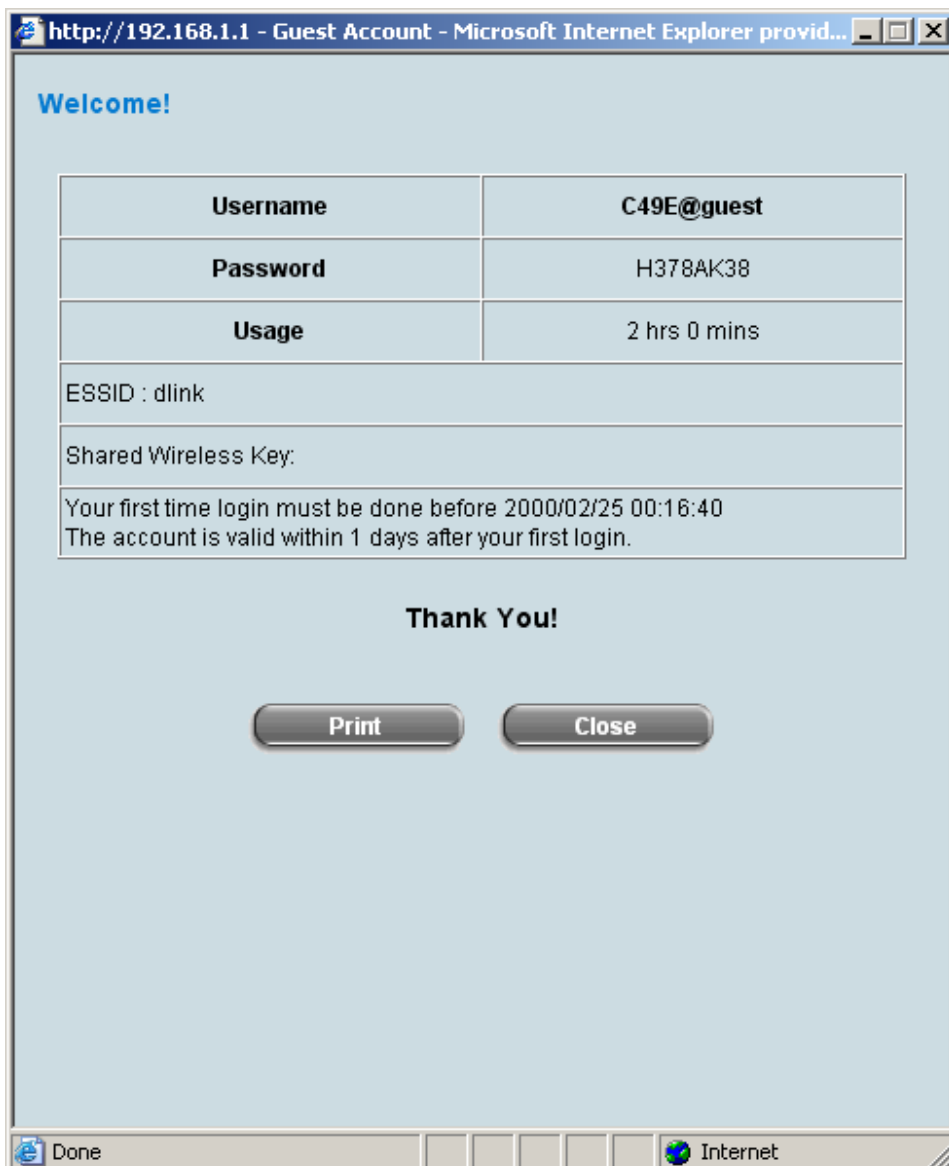

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools? HelpLogout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

Network

Status

Black List Settings

Select Black List

1:Blacklist1

Name

Blacklist1

User

Remark

Delete

(Total:0) [First](#) [Prev](#) [Next](#) [Last](#)

Add User(s)

✓ Apply

✕ Cancel

Done

Internet

D-Link DSA-3600 - Multi-Service Business Gateway

admin - 192.168.1.75

Tools Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
  - Authentication
  - Black List**
  - Policy
  - Additional Control
- Access Points
- Network
- Status

**Adding User(s) to Blacklist1**

No.	Username	Remark
1	<input type="text"/>	<input type="text"/>
2	<input type="text"/>	<input type="text"/>
3	<input type="text"/>	<input type="text"/>
4	<input type="text"/>	<input type="text"/>
5	<input type="text"/>	<input type="text"/>
6	<input type="text"/>	<input type="text"/>
7	<input type="text"/>	<input type="text"/>
8	<input type="text"/>	<input type="text"/>
9	<input type="text"/>	<input type="text"/>
10	<input type="text"/>	<input type="text"/>

Apply Cancel

**Policy is on page 36 to 48**

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
  - General
  - WAN1
  - WAN2
  - WAN Traffic
  - LAN Port Mapping
  - Service Zones
- Users
  - Authentication
  - Black List
  - Policy
  - Additional Control**
- Access Points
- Network
- Status



Additional Control	
User Session Control	Idle Timeout (minutes): <input type="text" value="10"/> *(1-1440)
	Multiple Login <input type="checkbox"/> (Authentication options using On-demand and RADIUS databases will not support this function.)
	Logout upon closing the "Login Success" window <input checked="" type="checkbox"/>
Built-in RADIUS Server Settings	Session Timeout (minutes): <input type="text" value="120"/> *(5-1440)
	Idle Timeout (minutes): <input type="text" value="10"/> *(1-120)
	Interim Update (minutes): <input type="text" value="5"/> *(1-120)
Customization	<a href="#">Certificate</a>
Remaining Time Reminder	<input checked="" type="radio"/> Enable <input type="radio"/> Disable <input type="text" value="5"/> minutes *(Range: 1-30; Default: 5)
MAC ACL	<a href="#">Edit</a> (Control list to manage which client devices are allowed to access the login page)

✓ Apply ✕ Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Print Preview Print & Mail

Address http://192.168.1.1/first.shtml Go Links


**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

- DSA-3600
  - System
    - General
    - WAN1
    - WAN2
    - WAN Traffic
    - LAN Port Mapping
    - Service Zones
  - Users
    - Authentication
    - Black List
    - Policy
    - Additional Control**
  - Access Points
  - Network
  - Status



**Upload Private Key**

File Name  Browse...

**Upload Certificate**

File Name  Browse...

Use Default Certificate

✓ Apply X Cancel

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

Network

Status

Access Control List

Enable

Disable

No.	MAC Address	No.	MAC Address
1		2	
3		4	
5		6	
7		8	
9		10	
11		12	
13		14	
15		16	
17		18	
19		20	

(Total:40) [First](#) [Prev](#) [Next](#) [Last](#)

Apply

Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrint

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

General

WAN1

WAN2

WAN Traffic

LAN Port Mapping

Service Zones

Users

Authentication

Black List

Policy

Additional Control

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

Status

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Access Points	
List	A list to show the information of each managed AP, including Type, Name, IP Address, MAC Address, and online Status. Functions in this section also include the operations such as reboot, enable, disable, delete, apply a new template, and other configuration.
Discovery	This Discovery function is to manually or automatically detect the supported types of APs when connected to the LAN ports and automatically assign a unique IP address to each AP discovered.
Adding	The Adding function is used to manually set up an AP via filling in the required information for that AP. The system provides 3 templates that can be used to simplify the AP configuration.
Templates	3 AP setting templates can be defined. These templates can be edited, saved, and used in "Adding" and "Discovery" sections.
Firmware	The Firmware function provides the tools to see the AP firmware version and upload new AP firmware into the system. The system stores up to three versions of AP firmware.
Upgrade	The Upgrade function allows administrators to upgrade the AP firmware using the firmware files stored in the system. Multiple AP firmware upgrade can be done at the same time.

D-Link

Multi-Service Business Gateway

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System


Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status



AP List

<input type="checkbox"/>	AP Type	AP Name	IP Address	Service Zone	Status
			MAC Address		
<input type="checkbox"/>	DWL-2100AP	<a href="#">NEWDEV-00001</a>	192.168.1.2 00:0F:3D:C2:3C:52	Default	<a href="#">Online</a> <a href="#">(Enabled)</a>

Reboot

Enable

Disable


Delete

Apply Template

Apply Service Zone

(Total: 1) [First](#) [Prev](#) [Next](#) [Last](#)

http://192.168.1.1/EquipmentManagement/AP\_CurrentStatus.shtml?devid=1Internet

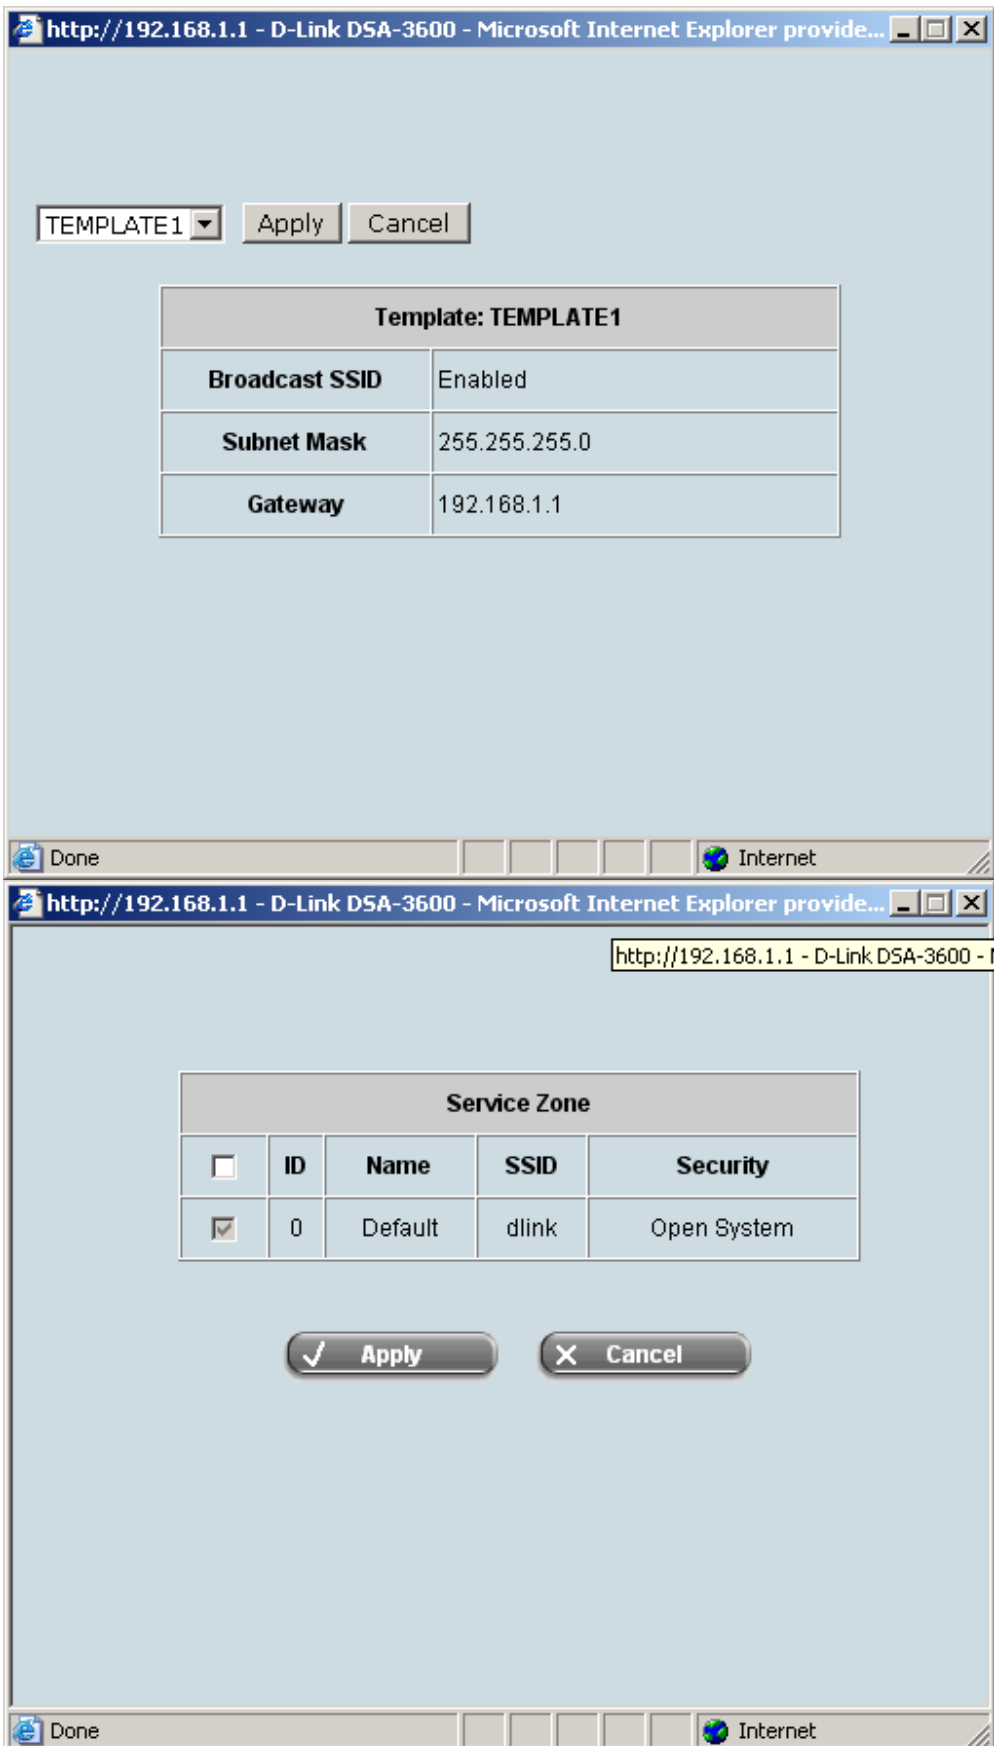

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links


**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

- DSA-3600
  - System
  - Users
  - Access Points
    - List
    - Discovery
    - Adding
    - Templates
    - Firmware
    - Upgrade
  - Network
  - Status



General Settings		
<a href="#">General</a>	AP Name	NEWDEV-00001
	Remark	None
	Firmware	v2.20eu

LAN Interface Settings		
<a href="#">LAN</a>	IP Address	192.168.1.2
	Gateway	192.168.1.1

Wireless Interface Settings		
<a href="#">Wireless LAN</a>	Channel	Auto
	Data Rate	Auto

Access Control Settings		
<a href="#">Access Control</a>	Status	Disabled
	Number of MAC Addresses	0

Changes to the settings will take effect after next reboot of AP.

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
  - Users
  - Access Points
    - List
    - Discovery
    - Adding
    - Templates
    - Firmware
    - Upgrade
  - Network
  - Status



### General Settings

Name	<input type="text" value="NEWDEV-00001"/>	
Admin Password	<input type="password"/>	
SNMP	<input type="text" value="Disabled"/>	
Syslog	System Activity	<input type="text" value="Enabled"/>
	Wireless Activity	<input type="text" value="Enabled"/>
	Notice	<input type="text" value="Enabled"/>
	Remote Syslog	<input type="text" value="Disabled"/>
Firmware	v2.20eu	
Remark	<input type="text"/>	

✓ Apply ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Reload Home Search Favorites RSS Print Mail News Groups Shopping

Address http://192.168.1.1/first.shtml Go Links


**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

- DSA-3600
  - System
  - Users
  - Access Points
    - List
    - Discovery
    - Adding
    - Templates
    - Firmware
    - Upgrade
  - Network
  - Status



LAN Settings	
IP Address	192.168.1.2
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1

✓ Apply ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

**Wireless**

Properties	SSID Broadcast	Enabled
	Channel	Auto
	Data Rate	Auto
	Fragment Length	2346 <small>(Default: 2346; Range: 256 ~ 2346)</small>
	RTS Length	2346 <small>(Default: 2346; Range: 256 ~ 2346)</small>
	Beacon Interval (ms)	100 <small>(Default: 100; Range: 20 ~ 1000 msec)</small>
	DTIM	1 <small>(Default: 1; Range: from 1 to 255)</small>
	Preamble	Short and Long
	Transmit Power	Full
	802.11g Only	Disabled
	Wireless QoS WMM	Enabled
	Load Balance	Disabled
	Link Integrate	Disabled
	Internal Station Connection	Enabled
Ethernet to WLAN Access	Enabled	

✓ Apply ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites

Address http://192.168.1.1/first.shtml

D-Link Building Networks for People

admin - 192.168.1.75

DSA-3600 Multi-Service Business Gateway

Tools

Help Logout

DSA-3600

System

Users

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

Status

Access Control

Status Disabled

MAC Address List

1	00:00:00:00:00:00	2	00:00:00:00:00:00
3	00:00:00:00:00:00	4	00:00:00:00:00:00
5	00:00:00:00:00:00	6	00:00:00:00:00:00
7	00:00:00:00:00:00	8	00:00:00:00:00:00
9	00:00:00:00:00:00	10	00:00:00:00:00:00
11	00:00:00:00:00:00	12	00:00:00:00:00:00
13	00:00:00:00:00:00	14	00:00:00:00:00:00
15	00:00:00:00:00:00	16	00:00:00:00:00:00
17	00:00:00:00:00:00	18	00:00:00:00:00:00
19	00:00:00:00:00:00	20	00:00:00:00:00:00
21	00:00:00:00:00:00	22	00:00:00:00:00:00
23	00:00:00:00:00:00	24	00:00:00:00:00:00
25	00:00:00:00:00:00	26	00:00:00:00:00:00
27	00:00:00:00:00:00	28	00:00:00:00:00:00
29	00:00:00:00:00:00	30	00:00:00:00:00:00
31	00:00:00:00:00:00	32	00:00:00:00:00:00

(Total:256) First Prev Next Last

Apply

Cancel

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

Users

Access Points

List

Discovery

Adding

Templates

Firmware

Upgrade

Network

Status

D-Link DSA-3600

AP Status Summary

AP Name	NEWDEV-00001
AP Type	DWL-2100AP
LAN Interface MAC Address	00:0f:3d:c2:3c:52
Wireless Interface MAC Address	00:0f:3d:c2:3c:52
Report Time	2000-02-24 16:35:10
SSID	dlink (Service Zone: Default)
Number of Associated Clients	0
Remark	

AP Status Details

System

LAN Interface

Wireless Interface

Access Control

Associated Clients

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail New Window New Tab

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools

Help Logout

DSA-3600

- System
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

System	
AP Name	NEWDEV-00001
AP Status	Online
Last Report Time	2000-02-24 16:35:10

D-Link DSA-3600

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status

LAN Interface

IP Address	192.168.1.2
Subnet Mask	255.255.255.0
Gateway	192.168.1.1

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source Add Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools

DSA-3600

- System
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

Wireless Interface		
Service Zone Default	SSID	dlink
	Security	open-system
Beacon Interval (ms)		100
RTS Threshold		2346
Channel		6
Transmission Rate		Auto
Preamble Type		Short and Long

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status

Access Control

Status	
	Disabled

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

HelpLogout

DSA-3600

System

Users

Access Points


- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status

Associated Clients List

No.	SSID	MAC Address	Username	Band	Authentication	Signal	Power Save Mode
-----	------	-------------	----------	------	----------------	--------	-----------------



DoneInternet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
  - Users
  - Access Points
    - List
    - Discovery
    - Adding
    - Templates
    - Firmware
    - Upgrade
  - Network
  - Status

**Discovery Settings**

AP Type	DWL-2100AP
New IP Address Assignment	Default
Admin Settings Used to Discover	<input checked="" type="radio"/> Factory Default IP Address: 192.168.0.50 Login ID: admin Password: (Empty) <input type="radio"/> Manual
IP Addresses of APs after Discovery	Start IP Address: 192.168.1.2

Scan Now

**Background AP Discovery**

Status	Disabled	Configure
--------	----------	-----------

**Discovery Results**

AP Type	IP Address	AP Name	Template	Service Zone	
	MAC Address	Password	Channel		Add

(Total: 0) [First](#) [Prev](#) [Next](#) [Last](#)

Last Discovery: 16:31:47 February 24, 2000

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status



### Discovery Settings

AP Type	DWL-2100AP
New IP Address Assignment	Default
Admin Settings Used to Discover	<p><input type="radio"/> Factory Default</p> <p><input checked="" type="radio"/> Manual</p> <p>IP Address: <input type="text" value="192.168.0.50"/> ~ <input type="text" value="192.168.0.50"/></p> <p>Login ID: <input type="text" value="admin"/></p> <p>Password: <input type="password"/></p>
IP Addresses of APs after Discovery	Start IP Address: <input type="text" value="192.168.1.2"/>

Scan Now

### Background AP Discovery

Status	Disabled	Configure
--------	----------	-----------

### Discovery Results

AP Type	IP Address	AP Name	Template	Service Zone	
	MAC Address	Password	Channel		Add
(Total: 0) <a href="#">First</a> <a href="#">Prev</a> <a href="#">Next</a> <a href="#">Last</a>					
Last Discovery: 16:31:47 February 24, 2000					

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopReloadHomeSearchFavorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System


Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware Upgrade

Network

Status



Background AP Discovery

AP Type	DWL-2100AP
New IP Address Assignment	Default
Admin Settings Used to Discover	<div><div>Factory Default</div><div>IP Address: 192.168.0.50</div><div>Login ID: admin</div><div>Password: (Empty)</div></div> <div><div>Manual</div></div>
IP Addresses of APs after Discovery	Start IP Address: 192.168.1.2
Status	<div><div>Enable</div><div>Disable</div></div>

OK

Cancel

Done

Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status

AP Type

DWL-2100AP

Template Name

TEMPLATE1

Edit

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

Tools

DSA-3600

System

Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status

D-Link

Template Editing

Name	TEMPLATE1	Configure
Copy Settings From	None	
Remark	Template 1	

✓ Apply

✕ Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Mail Print Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
  - Users
  - Access Points
    - List
    - Discovery
    - Adding
    - Templates
    - Firmware
    - Upgrade
  - Network
  - Status

Reset

General		
Subnet Mask	255.255.255.0	
Default Gateway	192.168.1.1	
SNMP	Disabled	
SYSLOG	System Activity	Enabled
	Wireless Activity	Enabled
	Notice	Enabled
	Remote Syslog Server	Disabled

Wireless		
Properties	SSID Broadcast	Enabled
	Data Rate	Auto
	Fragment Length	2346 <small>(Default: 2346; Range: 256 ~ 2346)</small>
	RTS Length	2346 <small>(Default: 2346; Range: 256 ~ 2346)</small>
	Beacon Interval (ms)	100 <small>(Default: 100; Range: 20 ~ 1000 msec)</small>
	DTIM	1 <small>(Default: 1; Range: from 1 to 255)</small>
	Preamble	Short and Long
	Transmit Power	Full
	802.11g Only	Disabled
Wireless QoS WMM	Enabled	

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back

Search

Favorites

Address 

http://192.168.1.1/first.shtml

Go

Links

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

Users

Access Points

- List
- Discovery
- Adding
- Templates
- Firmware
- Upgrade

Network

Status

Firmware Upload

File Name

Browse...

Upload

List

File Name	AP Type	Version	Size	Actions
Checksum				

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools

DSA-3600

- System
- Users
- Access Points
  - List
  - Discovery
  - Adding
  - Templates
  - Firmware
  - Upgrade
- Network
- Status

List					
Name	Type	Version	Last Upgraded Time	Next Version	Selection
NEWDEV-00001	DWL-2100AP	v2.20eu	N/A	N/A	<input type="checkbox"/>

Upgrade Cancel

Done


Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print W Yellow Star Link

Address http://192.168.1.1/first.shtml Go Links


**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

DSA-3600

- System
- Users
- Access Points
- Network**
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status



Network Configuration	
<b>NAT</b>	The NAT function supports 3 types of network address translation: DMZ(Demilitarized Zone), Public Accessible Server and IP/Port Redirect.
<b>Privilege</b>	The Privilege function supports two types of privilege list based on IP address and MAC address. Devices specified in the list require NO authentication to access the network.
<b>Monitor IP</b>	Up to 40 IP addresses can be defined in the Monitor IP function. System can monitor these IP based network devices and periodically report online status via email based on a configurable interval. These monitored devices can be accessed via HTTP or HTTPS connection. The management interface of the monitored device can be accessed via a hyperlink of device's IP address when the system is operated under NAT mode.
<b>Walled Garden</b>	Up to 20 domain names/IP addresses can be defined in the list. Authentication is NOT required for users to access these domains and/or URLs.
<b>Proxy Server</b>	System supports up to 10 external proxy servers.
<b>DDNS</b>	System supports dynamic DNS (DDNS) feature.
<b>Client Mobility</b>	System supports IP plug-and-play(PNP).
<b>VPN</b>	There are 3 types of VPN connection supported in the system, including Local VPN, Remote VPN, and Site-to-Site VPN. For the local VPN, an IPSec tunnel can be established between the system and the client located at the LAN side. For the Remote VPN, a PPTP tunnel can be established between the system and the remote user over the Internet. For the Site-to-Site VPN, an IPSec tunnel can be constructed to be used to connect to other IPSec capable device over the Internet.

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrint

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

Users

Access Points

Network

NAT

Privilege

Monitor IP

Walled Garden

Proxy Server

DDNS

Client Mobility

VPN

Status

Image of D-Link DSA-3600 device

Network Address Translation

[DMZ \(Demilitarized Zone\)](#)

[Public Accessible Server](#)

[Port and IP Redirect](#)

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Address

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status

Automatic WAN IP Assignment

Enable	External IP Address	External Interface	Internal IP Address
<input type="checkbox"/>	202.129.109.82	WAN1	<input type="text"/>

Static Assignments

No.	External IP Address	External Interface	Internal IP Address
1	<input type="text"/>	WAN1	<input type="text"/>
2	<input type="text"/>	WAN1	<input type="text"/>
3	<input type="text"/>	WAN1	<input type="text"/>
4	<input type="text"/>	WAN1	<input type="text"/>
5	<input type="text"/>	WAN1	<input type="text"/>
6	<input type="text"/>	WAN1	<input type="text"/>
7	<input type="text"/>	WAN1	<input type="text"/>
8	<input type="text"/>	WAN1	<input type="text"/>
9	<input type="text"/>	WAN1	<input type="text"/>
10	<input type="text"/>	WAN1	<input type="text"/>

(Total:40)
[First](#)
[Prev](#)
[Next](#)
[Last](#)

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status

Public Accessible Server

No.	External Service Port	Local Server IP Address	Local Server Port	Type	Enable
1				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
2				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
3				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
4				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
5				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
6				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
7				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
8				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
9				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>
10				<input type="radio"/> TCP <input type="radio"/> UDP	<input type="checkbox"/>

(Total:40) [First](#) [Prev](#) [Next](#) [Last](#)

✓ Apply

✕ Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status

Port and IP Redirect

No.	Destination		Translated to Destination		Type
	IP Address	Port	IP Address	Port	
1					<input type="radio"/> TCP <input type="radio"/> UDP
2					<input type="radio"/> TCP <input type="radio"/> UDP
3					<input type="radio"/> TCP <input type="radio"/> UDP
4					<input type="radio"/> TCP <input type="radio"/> UDP
5					<input type="radio"/> TCP <input type="radio"/> UDP
6					<input type="radio"/> TCP <input type="radio"/> UDP
7					<input type="radio"/> TCP <input type="radio"/> UDP
8					<input type="radio"/> TCP <input type="radio"/> UDP
9					<input type="radio"/> TCP <input type="radio"/> UDP
10					<input type="radio"/> TCP <input type="radio"/> UDP

(Total:40) [First](#) [Prev](#) [Next](#) [Last](#)

Apply

Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrint

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

Users

Access Points

Network

NAT

Privilege

Monitor IP

Walled Garden


Proxy Server

DDNS

Client Mobility

VPN

Status



Privilege List

[IP Address List](#)

[MAC Address List](#)

Done

Internet





D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites

Address http://192.168.1.1/first.shtml Go Links

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools Help Logout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status


Monitor IP List							
No.	Protocol	IP Address	Hyperlink	No.	Protocol	IP Address	Hyperlink
1	http		Create	2	http		Create
3	http		Create	4	http		Create
5	http		Create	6	http		Create
7	http		Create	8	http		Create
9	http		Create	10	http		Create
11	http		Create	12	http		Create
13	http		Create	14	http		Create
15	http		Create	16	http		Create
17	http		Create	18	http		Create
19	http		Create	20	http		Create

(Total: 40) [First](#) [Prev](#) [Next](#) [Last](#)

Monitor Now

✓ Apply

✗ Cancel



Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source Add Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status

**Walled Garden List**

No.	Domain Name/IP Address	No.	Domain Name/IP Address
1	<input type="text"/>	2	<input type="text"/>
3	<input type="text"/>	4	<input type="text"/>
5	<input type="text"/>	6	<input type="text"/>
7	<input type="text"/>	8	<input type="text"/>
9	<input type="text"/>	10	<input type="text"/>
11	<input type="text"/>	12	<input type="text"/>
13	<input type="text"/>	14	<input type="text"/>
15	<input type="text"/>	16	<input type="text"/>
17	<input type="text"/>	18	<input type="text"/>
19	<input type="text"/>	20	<input type="text"/>

✓ Apply ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools

HelpLogout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN
- Status

External Proxy Servers

No.	IP Address	Port
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

Redirect Outgoing Proxy Traffic To Built-in Proxy Server

Built-in Proxy Server

☐ Enable☒ Disable

Apply

Cancel

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS**
  - Client Mobility
  - VPN
- Status



### Dynamic DNS

DDNS	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Provider	<input type="text" value="DynDNS.org(Dynamic)"/>
Host Name	<input type="text"/>
Username/E-mail	<input type="text"/>
Password/Key	<input type="text"/>

✓ Apply ✕ Cancel

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout


DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS**
  - Client Mobility
  - VPN
- Status

Dynamic DNS

DDNS	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Provider	DynDNS.org(Dynamic)
Host Name	DynDNS.org(Dynamic) DynDNS.org(Custom) DynDNS.org(Static)
Username/E-mail	dhs.org myip.us
Password/Key	no-ip.com 3322.org(Dynamic) 3322.org(Static) zoneedit.com

Apply Cancel



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail New Window Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility**
  - VPN
- Status



**Client Mobility**

IP PNP ☐ Enable ☒ Disable

✓ Apply ✕ Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrintSendToRun

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

Users

Access Points

Network

NAT

Privilege

Monitor IP

Walled Garden

Proxy Server

DDNS

Client Mobility

VPN

Status

VPN Settings

Local VPN

Remote VPN

Site-to-Site VPN

Done

Internet



D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
  - Users
  - Access Points
  - Network
    - NAT
    - Privilege
    - Monitor IP
    - Walled Garden
    - Proxy Server
    - DDNS
    - Client Mobility
    - VPN**
  - Status

**Remote VPN For The Entire System**

**Active** ☐ Enable ☒ Disable

**IP Address Range Assignment** Start IP Address  (\*Support up to 10 PPTP connections.)

**Authentication Options**

Auth Option	Auth Database	Postfix	Default	Enabled
<a href="#">Server 1</a>	LOCAL	local	<input checked="" type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Server 2</a>	POP3	pop3	<input type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Server 3</a>	RADIUS	radius	<input type="radio"/>	<input checked="" type="checkbox"/>
<a href="#">Server 4</a>	LDAP	ldap	<input type="radio"/>	<input checked="" type="checkbox"/>

**Client Policy**

**Client Login Page**

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

Users

Access Points

Network

NAT

Privilege

Monitor IP

Walled Garden


Proxy Server

DDNS

Client Mobility

VPN

Status



Remote Site Configuration

Name	IP Address	Pre-shared Key	Edit	Delete
<div>Add A Remote Site</div>				

Local Site Configuration

Local Subnet	Local Interface	Remote VPN Gateway	Remote Subnet	Edit	Delete
<div>Add A Local Site</div>					

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address <http://192.168.1.1/first.shtml> Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

DSA-3600

- System
- Users
- Access Points
- Network
  - NAT
  - Privilege
  - Monitor IP
  - Walled Garden
  - Proxy Server
  - DDNS
  - Client Mobility
  - VPN**
- Status



### Remote VPN Gateway

Name		
IP Address		
Authentication Method	Pre-shared Key	
Pre-shared Key		
Phase1 Proposal	Encryption AES256	Authentication SHA-1
Diffie-Hellman Group	<input type="checkbox"/> Group 1 <input type="checkbox"/> Group 2 <input type="checkbox"/> Group 5	
IKE Life Time	IKE Life Time 8h (s: second, m: minute, h: hour, d: day)	
Dead Peer Detection	DPD Delay 10 (second)	DPD Timeout 15 (second)

### Remote Subnet

No.	Network	Mask
1		255.255.255.255 (/32)
2		255.255.255.255 (/32)
3		255.255.255.255 (/32)
4		255.255.255.255 (/32)
5		255.255.255.255 (/32)
6		255.255.255.255 (/32)
7		255.255.255.255 (/32)
8		255.255.255.255 (/32)
9		255.255.255.255 (/32)
10		255.255.255.255 (/32)

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
  - Users
  - Access Points
  - Network
    - NAT
    - Privilege
    - Monitor IP
    - Walled Garden
    - Proxy Server
    - DDNS
    - Client Mobility
    - VPN**
  - Status



### Local Site Information

Local Interface	WAN1	
Remote VPN Gateway	<div><div></div> Edit Host Add a New Host</div>	
Local Subnet	<div></div> (in prefix notation: x.xxx.yy)	
Remote Subnet	<div></div>	
Phase2 Proposal	Encryption AES256	Authentication SHA-1
Key's Life Time	Key's Life Time 24h (s: second, m: minute, h: hour, d: day)	
Rekey	<div><input type="checkbox"/> Enable Rekey</div> <div>Rekey Margin 9m (s: second, m: minute, h: hour, d: day)</div>	
Perfect Forward Secrecy	<div><input checked="" type="checkbox"/> Enable PFS</div> <div>PFS Group MODP1024 Group 2</div>	

Apply Cancel

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools ? Help Logout

- DSA-3600
  - System
  - Users
  - Access Points
  - Network
  - Status**
    - System
    - Interface
    - Online Users
    - User Logs
    - E-mail & SYSLOG

Status	
<b>System</b>	Display current settings of the system.
<b>Interface</b>	Display the current settings of the WAN 1, WAN 2, Controlled LAN, and Uncontrolled LAN.
<b>Online Users</b>	Display the information of the online users. Content of the information includes Username, IP Address, MAC Address, Packet Count (In/Out), Byte Count (In/Out) and idle time. Administrator can remove the online user via clicking the Logout button in each record.
<b>User Logs</b>	Display detailed user access records on daily basis. History record of up to 3 days is kept in the system's volatile memory.
<b>E-mail &amp; SYSLOG</b>	The system can send reports to up to 3 email accounts. The types of report sent includes Monitor IP report, User logs, and AP status change. External SYSLOG server is configured here.



Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Book Favorites

Address http://192.168.1.1/first.shtml Go Links

**D-Link**  
Building Networks for People


admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

DSA-3600

- System
- Users
- Access Points
- Network
- Status
- System**
  - Interface
  - Online Users
  - User Logs
  - E-mail & SYSLOG



System Setting Overview		
Firmware Version		1.00.00
Build		01600
System Name		DSA-3600
Homepage Redirect URL		http://www.dlink-intl.com/
SYSLOG Server - System Log		N/A:N/A
SYSLOG Server - Guests User Log		N/A:N/A
Proxy Server		Disabled
Logout upon closing the "Login Success" window		Enabled
Warning of Internet Disconnection		Disabled
WAN Failover		Disabled
SNMP		Disabled
User Logs	Retained Days	3 days
	Receiver E-mail Address(es)	N/A
		N/A
System Time	NTP Server	Cannot Sync
	Time	2000/02/24 16:56:19 +1100
User Session Control	Idle Time Out	10 Min(s)
	Multiple Login	Disabled
DNS	Preferred DNS Server	168.95.1.1
	Alternate DNS Server	N/A

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

ToolsHelpLogout

DSA-3600

System

Users

Access Points

Network

Status


System

Interface

Online Users

User Logs

E-mail & SYSLOG



Network Interface		
WAN1	MAC Address	00:15:E9:DB:1C:47
	IP Address	202.129.109.82
	Subnet Mask	255.255.255.224
Service Zone - Default	Mode	NAT
	IP Address	192.168.1.1
	Subnet Mask	255.255.255.0
Service Zone - Default DHCP Server	Status	Enabled
	WINS IP Address	N/A
	Start IP Address	192.168.1.2
	End IP Address	192.168.1.100
	Lease Time	1440 Min(s)
Service Zone - SZ1	Disabled	
Service Zone - SZ2	Disabled	
Service Zone - SZ3	Disabled	

DoneInternet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopReloadHomeSearchFavoritesRefreshPrintSendToRun

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

HelpLogout

DSA-3600

System

Users

Access Points

Network

Status

System

Interface

Online Users

User Logs

E-mail & SYSLOG

Online Users List

No.	Username		Pkts In	Bytes In	Idle (Sec.)	Access From
	IP Address	MAC Address	Pkts Out	Bytes Out		Kick Out

Refresh

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Help

Logout

DSA-3600

System

Users

Access Points

Network

Status

System

Interface

Online Users

User Logs

E-mail & SYSLOG

Users Log

Date	Size (Byte)
2000-02-24	65

Guests User Log


Date	Size (Byte)
2000-02-24	226

Roaming Out User Log

Date	Size (Byte)
2000-02-24	106

Roaming In User Log

Date	Size (Byte)
2000-02-24	112



Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Address

http://192.168.1.1/status/history\_fmt.shtml?dt=2000-02-24

Go

Links

Users Log 2000-02-24

Date	Type	Name	IP	MAC	Pkts In	Bytes In	Pkts Out	Bytes Out
------	------	------	----	-----	---------	----------	----------	-----------

Done

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help


Back Forward Stop Reload Home Search Favorites RSS Print Mail News Groups

Address [http://192.168.1.1/status/odhistory\\_fmt.shtml?dt=2000-02-24](http://192.168.1.1/status/odhistory_fmt.shtml?dt=2000-02-24) Go Links

### Guests User Log 2000-02-24

Date	System Name	Type	Name	IP	MAC	Pkts In	Bytes In	Pkts Out	Bytes Out	1st Login Expiration Time	Account Valid Through
2000-02-24 16:16:40	DSA-3600	Create_Guest_User	C49E	0.0.0.0	00:00:00:00:00:00	0	0	0	0	2000-02-25 00:16:40	None

Done Internet

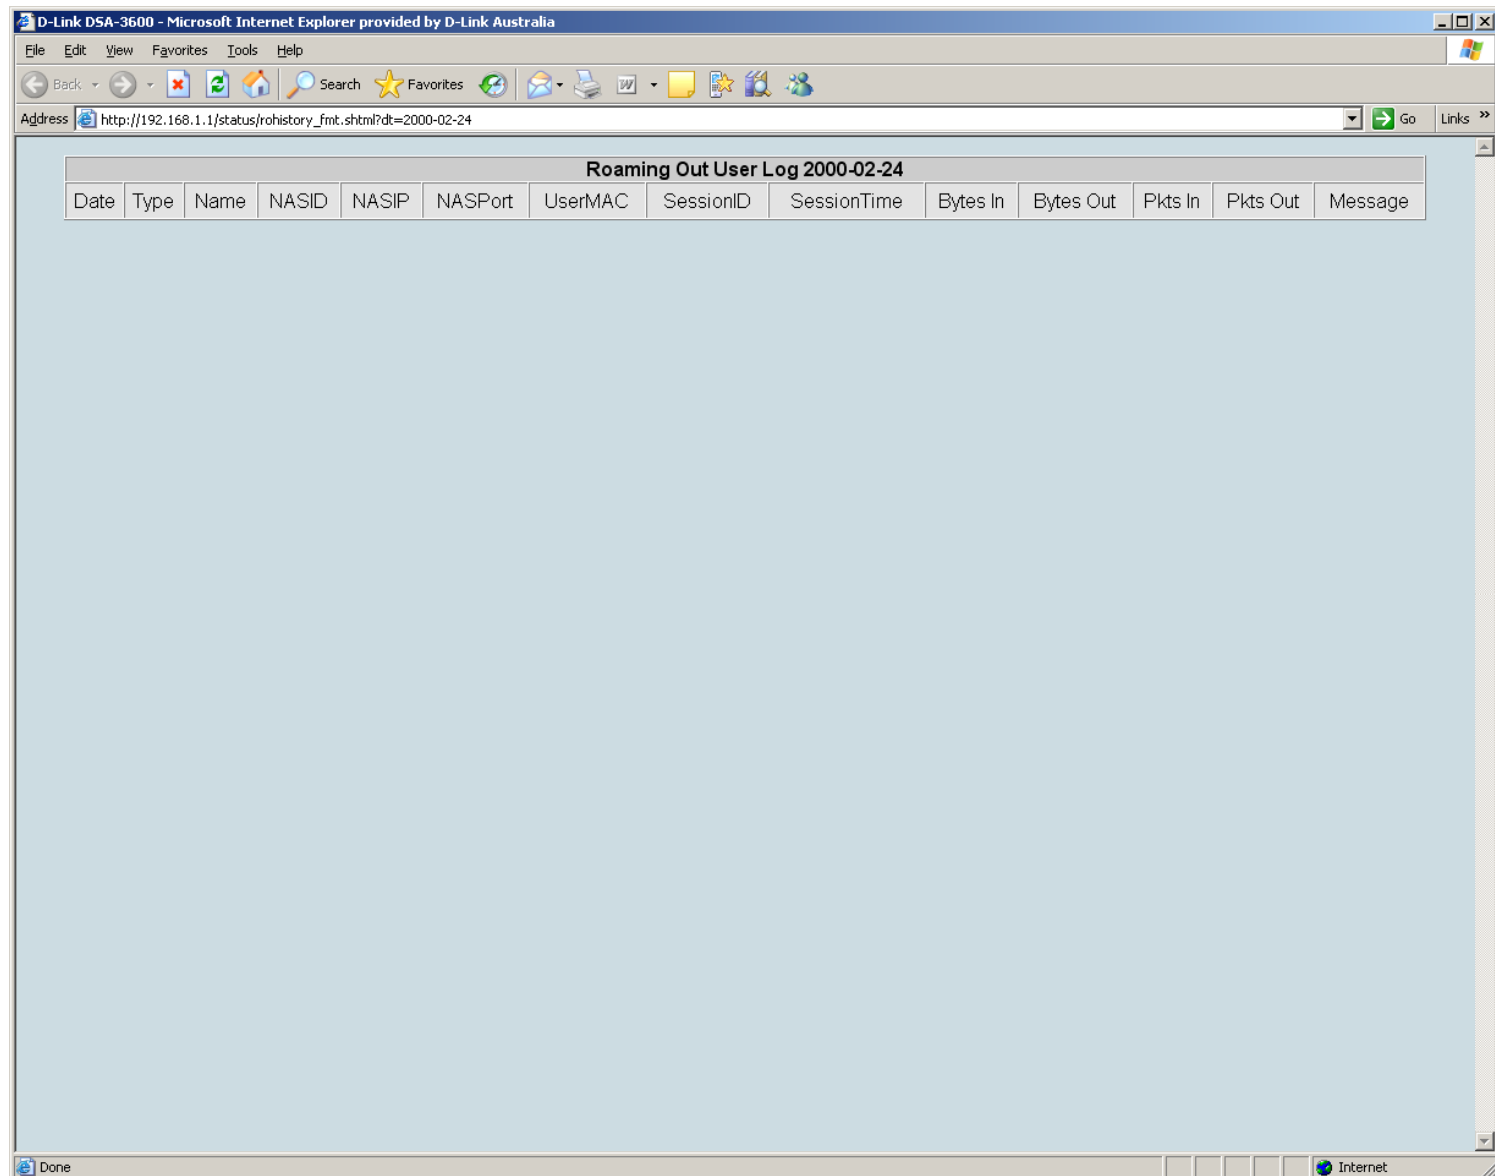

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print View Source View Image Add to Favorites

Address [http://192.168.1.1/status/rihistory\\_fmt.shtml?dt=2000-02-24](http://192.168.1.1/status/rihistory_fmt.shtml?dt=2000-02-24) Go Links

### Roaming In User Log 2000-02-24

Date	Type	Name	NASID	NASIP	NASPort	UserMAC	UserIP	SessionID	SessionTime	Bytes In	Bytes Out	Pkts In	Pkts Out	Message
------	------	------	-------	-------	---------	---------	--------	-----------	-------------	----------	-----------	---------	----------	---------

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Print Mail Address Bar Go Links

Address http://192.168.1.1/first.shtml

**D-Link**  
Building Networks for People

admin - 192.168.1.75

**DSA-3600**  
Multi-Service Business Gateway

Tools Help Logout

Tools

- DSA-3600
  - System
  - Users
  - Access Points
  - Network
  - Status
    - System
    - Interface
    - Online Users
    - User Logs
    - E-mail & SYSLOG**

**Notification E-mail Settings**

Receiver E-mail Address(es)	Monitor IP Report	Users Log	Guests User Log	AP Status Change
<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Interval	1 Hour	1 Hour	1 Hour	N/A
SMTP Setting Test	<input type="button" value="Send"/>	<input type="button" value="Send"/>	<input type="button" value="Send"/>	<input type="button" value="Send"/>
Sender E-mail Address	<input type="text"/>			
SMTP Server	<input type="text"/>			
SMTP Auth Method	None			

**SYSLOG Server Settings**

System Log	IP: <input type="text"/>	Port: <input type="text"/>
Guests User Log	IP: <input type="text"/>	Port: <input type="text"/>

Done Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrintMailNewFindOpenRecent

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Setup Wizard

Password Change

Backup & Restore

System Upgrade

Restart

Wake-On-LAN

Quick Links

Done

Internet

Admin Password

Original	<input type="password"/>
New	<input type="password"/>
Verify	<input type="password"/>

✓ Apply

✗ Cancel

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools

Setup WizardPassword ChangeBackup & RestoreSystem UpgradeRestartWake-On-LANQuick Links

HelpLogout

Backup System Settings

Backup

Restore System Settings

File NameBrowse...Restore

Reset to The Factory Default

Reset

D-Link

DoneInternet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

BackForwardStopHomeSearchFavoritesRefreshPrintMailNewFindOpenRecent

Addresshttp://192.168.1.1/first.shtmlGoLinks

D-Link

Building Networks for People

admin - 192.168.1.75

DSA-3600

Multi-Service Business Gateway

Tools

Setup Wizard

Password Change

Backup & Restore

System Upgrade

Restart

Wake-On-LAN

Quick Links

Help

Logout

System Firmware Upgrade


Current Version	1.00.00
File Name	<input type="text"/> Browse...

Note: For better maintenance, we strongly recommend you backup system settings before upgrading firmware.

Apply

Done

Internet

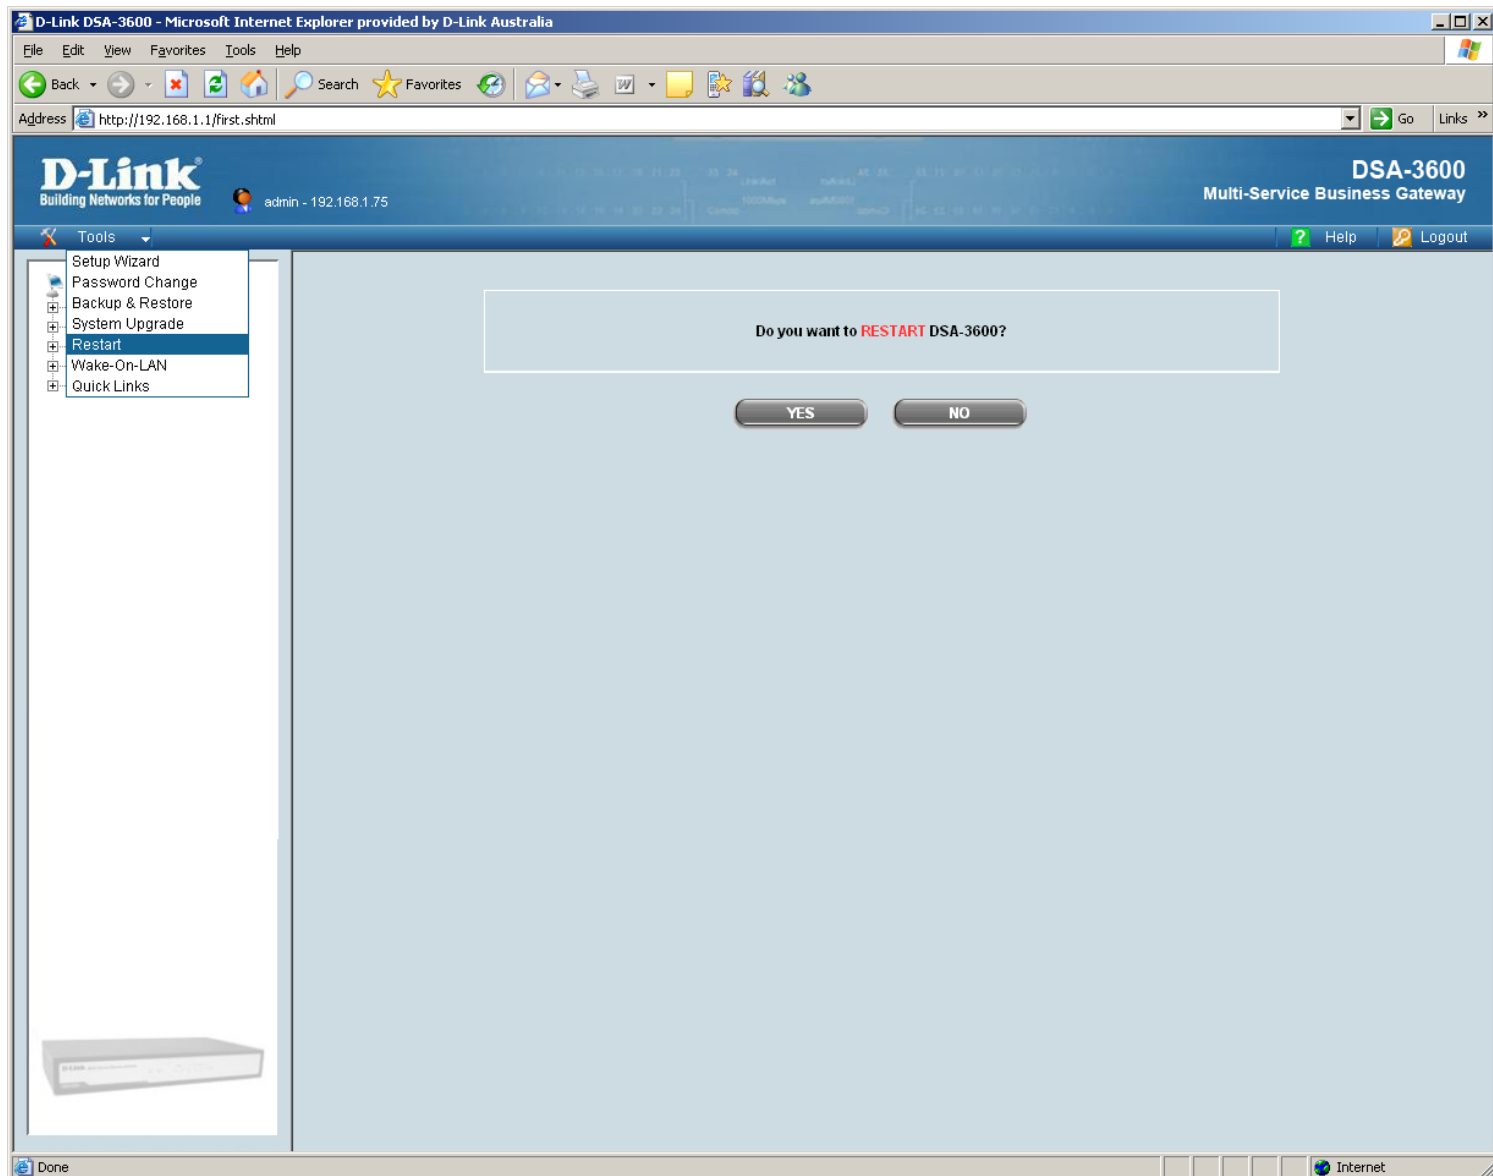

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link®

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

HelpLogout

Tools

Setup Wizard

Password Change


Backup & Restore

System Upgrade

Restart

Wake-On-LAN

Quick Links



Wake-on-LAN

MAC Address

Wake Up

Internet

D-Link DSA-3600 - Microsoft Internet Explorer provided by D-Link Australia

FileEditViewFavoritesToolsHelp

Back

Search

Favorites

Addresshttp://192.168.1.1/first.shtmlGoLinks»

D-Link®

Building Networks for People

admin - 192.168.1.75

DSA-3600  
Multi-Service Business Gateway

Tools

Setup WizardPassword ChangeBackup & RestoreSystem UpgradeRestartWake-On-LANQuick Links

Quick Links

System Status

Online User List

Local User Management


Guest Account Management

Policy Management

Authentication Configuration

AP Management

Firmware Management



Internet