

Setting up the DSL-2730B for IPTV

1. Login to the Web Configuration. By default <http://192.168.1.1>
2. Enter in the Username and Password to login to your DSL-2730B.
3. Under Web Configuration click on SETUP > Internet Setup.

Product Page: DSL-2730B Firmware Version: AU_1.01

D-Link

DSL-2730B SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard

Internet Setup

Wireless Settings

Local Network

Time and Date

Logout

SETTING UP YOUR INTERNET

There are two ways to set up your Internet connection. You can use the Web-based Internet Connection Setup Wizard or you can manually configure the connection.

Please make sure you have your ISP's connection settings first if you choose manual setup.

INTERNET CONNECTION WIZARD

You can use this wizard for assistance and quick connection of your new Router to the Internet. You will be presented with step-by-step instructions in order to get your Internet connection up and running. Click the button below to begin.

Note: Before launching the wizard, please ensure you have correctly followed the steps outlined in the Quick Installation Guide included with the router.

Helpful Hints...

First time users are recommended to run the **Setup Wizard**. Click the **Setup Wizard** button and you will be guided step by step through the process of setting up your ADSL connection.

If you consider yourself an advanced user or have configured a router before, click **Setup>Internet Setup** to input all the settings manually.

More...

4. Click the Add button.

Product Page: DSL-2730B Firmware Version: AU_1.01

D-Link

DSL-2730B SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard

Internet Setup

Wireless Settings

Local Network

Time and Date

Logout

INTERNET SETUP

Wide Area Network (WAN) Service Setup

Choose Add, or Remove to configure a WAN service over a selected interface.

WAN CONFIGURATION

Interface	Description	Type	IGMP	NAT	Firewall	IPv6	MLD		
ppp0	pppoe_0_8_35	PPPoE	Disabled	Enabled	Enabled	Disabled	Disabled	<input type="checkbox"/>	<input type="checkbox"/>

Helpful Hints...

When configuring the router to access the Internet, be sure to choose the correct **Connection Type** from the list below.

Please take care when entering your **username** and **password** as these are case sensitive. The majority of connection issues are caused by incorrect **username** or **password** combinations.

Notes: Be sure to restart the router for the new Internet Setting to take effect.

More...

Setting up the DSL-2730B for IPTV

5. Under ATM INTERFACE CONFIGURATION, enter as per below:

Product Page: DSL-2730B Firmware Version: AU_1.01

D-Link

DSL-2730B SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
Internet Setup
Wireless Settings
Local Network
Time and Date
Logout

WAN SETUP

This screen allows you to configure ATM service, Configure a WAN service over this interface

ATM INTERFACE CONFIGURATION

VPI [0-255]: 0
VCI [32-65535]: 35
Select DSL Link Type (EoA is for PPPoE, IPoE, and Bridge): EoA PPPoA IPoA
Encapsulation Mode: LLC/SNAP-BRIDGING
Service Category: UBR Without PCR
Enable Quality Of Service:

WAN SERVICE CONFIGURATION

Select WAN service type: PPP over Ethernet (PPPoE) IP over Ethernet Bridging
Enter Service Description: br_0_0_35
Enable IPv6 for this service:

Apply Cancel

Helpful Hints...
When configuring the router to access the Internet, be sure to choose the correct Connection Type from the list below.
Please take care when entering your username and password as these are case sensitive. The majority of connection issues are caused by incorrect username or password combinations.
Note: Be sure to restart the router for the new Internet Setting to take effect.
More...

6. Click the Apply button.

7. You should be able to see the new WAN profile entry as per below

Product Page: DSL-2730B Firmware Version: AU_1.01

D-Link

DSL-2730B SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
Internet Setup
Wireless Settings
Local Network
Time and Date
Logout

INTERNET SETUP

Wide Area Network (WAN) Service Setup
Choose Add, or Remove to configure a WAN service over a selected interface.

WAN CONFIGURATION


Interface	Description	Type	IGMP	NAT	Firewall	IPv6	MLD	
ppp0	pppoe_0_8_35	PPPoE	Disabled	Enabled	Enabled	Disabled	Disabled	
atm1	br_0_0_35	Bridge	Disabled	Disabled	Disabled	Disabled	Disabled	

Add


Helpful Hints...
When configuring the router to access the Internet, be sure to choose the correct Connection Type from the list below.
Please take care when entering your username and password as these are case sensitive. The majority of connection issues are caused by incorrect username or password combinations.
Note: Be sure to restart the router for the new Internet Setting to take effect.
More...

Setting up the DSL-2730B for IPTV

8. Click on ADVANCED > Network Tools > IGMP

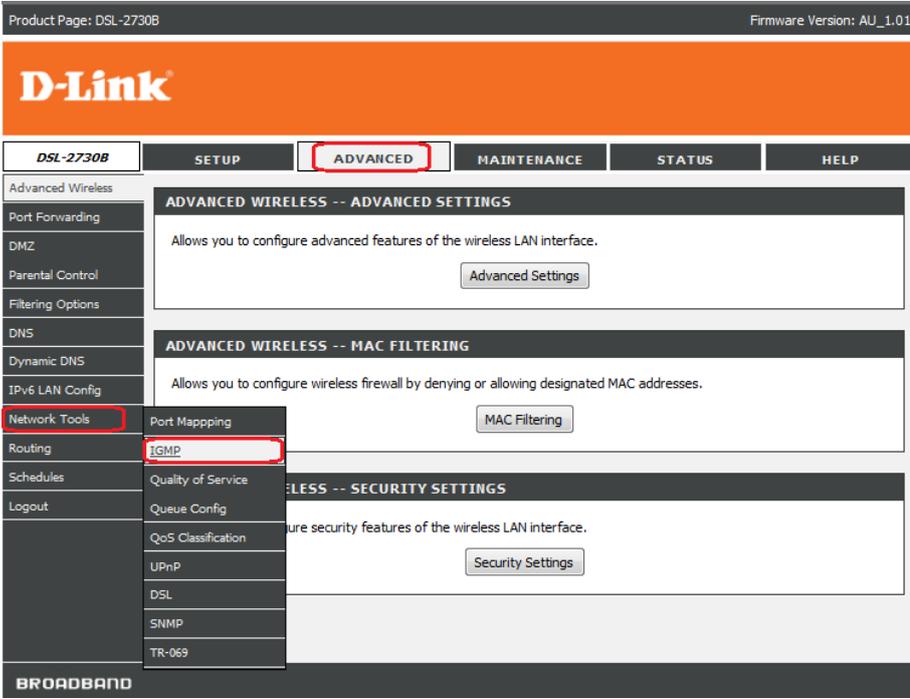

9. Tick [Enable IGMP Snooping] box under IGMP SETUP page

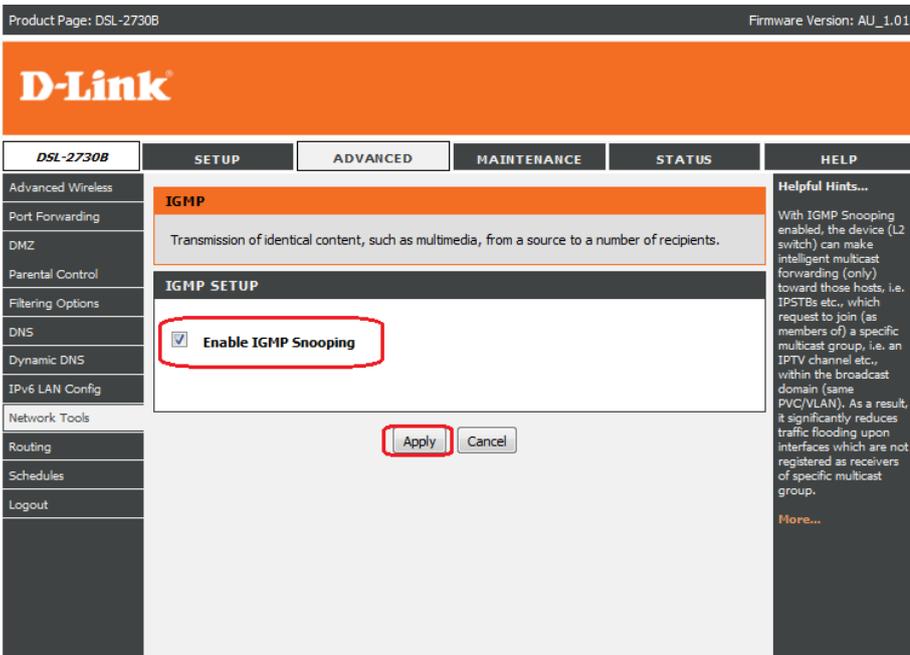

10. Click on Apply to save the settings

Setting up the DSL-2730B for IPTV

11. Click on MAINTENANCE > System > Reboot

Allow the DSL-2730B to reboot with the new settings.

Product Page: DSL-2730B Firmware Version: AU_1.01

D-Link

DSL-2730B	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
System	SYSTEM -- REBOOT <p>Click the button below to reboot the router.</p> <p style="text-align: center;"><input type="button" value="Reboot"/></p>				Helpful Hints... <p>This page allows you to reboot your router or save your router configuration to a file on your computer as a precaution. In case you have to reset your router to factory default settings, you will be able to restore your router settings from a previously saved configuration file. There is also a function to allow you to reset your router to factory default settings. Resetting your router to factory default settings will delete your current configuration.</p> <p>More...</p>
Firmware Update	SYSTEM -- BACKUP SETTINGS <p>Back up DSL Router configurations. You may save your router configurations to a file on your PC. <i>Note: Please always save configuration file first before viewing it.</i></p> <p style="text-align: center;"><input type="button" value="Backup Settings"/></p>				
Access Controls	SYSTEM -- UPDATE SETTINGS <p>Update DSL Router settings. You may update your router settings using your saved files.</p> <p>Settings File Name : <input type="text"/> <input type="button" value="Browse..."/></p> <p style="text-align: center;"><input type="button" value="Update Settings"/></p>				
Diagnostics	SYSTEM -- RESTORE DEFAULT SETTINGS <p>Restore DSL Router settings to the factory defaults.</p> <p style="text-align: center;"><input type="button" value="Restore Default Settings"/></p>				
System Log					
Logout					