


DIR-815 How to update the firmware

1. Using an Internet Browser type into the URL:

http://192.168.0.1

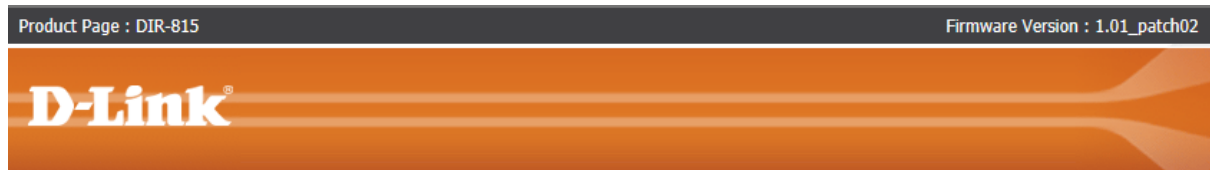

LOGIN

Login to the router :


User Name :

Password :



Type in your Password if you have changed it, or leave it blank and then click on the Login button.

2. Click on the Tools menu:

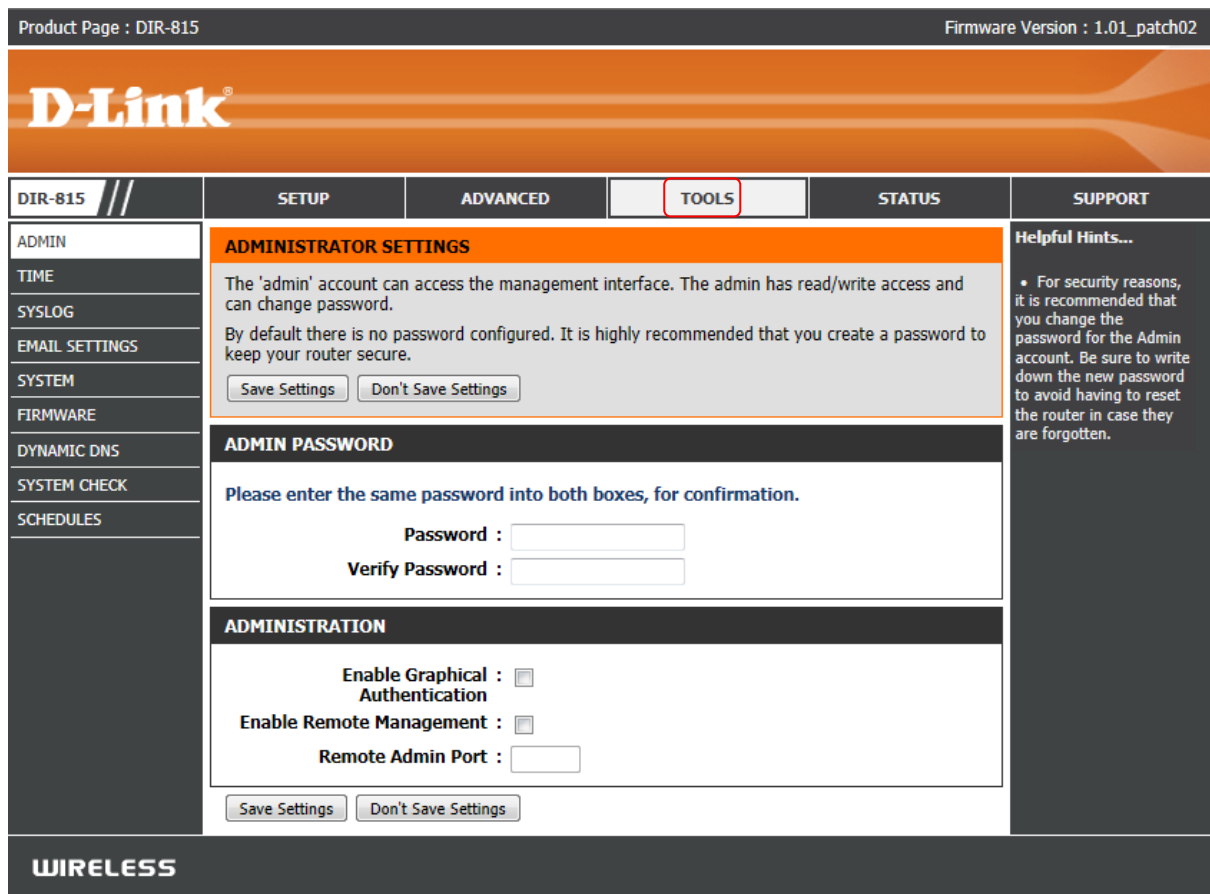

DIR-815 How to update the firmware

3. Click on the Firmware menu.

The screenshot shows the D-Link DIR-815 web interface. At the top, it displays 'Product Page : DIR-815' and 'Firmware Version : 1.01_patch02'. The D-Link logo is prominently displayed. Below the logo is a navigation menu with tabs for 'DIR-815', 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The 'DIR-815' tab is selected, and a sub-menu on the left lists various settings: ADMIN, TIME, SYSLOG, EMAIL SETTINGS, SYSTEM, FIRMWARE (highlighted with a red box), DYNAMIC DNS, SYSTEM CHECK, and SCHEDULES. The main content area is titled 'FIRMWARE UPDATE' and contains the following text:

FIRMWARE UPDATE

There may be new firmware for your router to improve functionality and performance. [Click here to check for an upgrade on our support site.](#)

To upgrade the firmware, locate the upgrade file on the local hard drive with the Browse button. Once you have found the file to be used, click the Upload button to start the firmware upgrade.

The language pack allows you to change the language of the user interface on the router. We suggest that you upgrade your current language pack if you upgrade the firmware. This ensures that any changes in the firmware are displayed correctly.

To upgrade the language pack, locate the upgrade file on the local hard drive with the Browse button. Once you have found the file to be used, click the Upload button to start the language pack upgrade.

FIRMWARE INFORMATION

Current Firmware Version : 1.01_patch02
Current Firmware Date : Wed 03 Aug 2011
Check Online Now for Latest : Firmware Version

FIRMWARE UPGRADE

Note: Some firmware upgrades reset the configuration options to the factory defaults. Before performing an upgrade, be sure to save the current configuration.

To upgrade the firmware, your PC must have a wired connection to the router. Enter the name of the firmware upgrade file, and click on the Upload button.

Upload :

On the right side of the interface, there is a 'Helpful Hints...' section with a bullet point: 'Firmware Update are released periodically to improve the functionality of your router and also to add features. If you run into a problem with a specific feature of the router, check our support site by clicking on the Check Now and see if an updated version of firmware is available for your router.'

4. Under the Firmware Upgrade menu click the Browse button:

This is a close-up screenshot of the 'FIRMWARE UPGRADE' section. It features a red warning note: 'Note: Some firmware upgrades reset the configuration options to the factory defaults. Before performing an upgrade, be sure to save the current configuration.' Below this is a blue instruction: 'To upgrade the firmware, your PC must have a wired connection to the router. Enter the name of the firmware upgrade file, and click on the Upload button.' At the bottom, there is an 'Upload' form with a text input field, a 'Browse...' button (highlighted with a red box), and an 'Upload' button (also highlighted with a red box).


Select the firmware file saved to your computer, now click on the Upload button.

DIR-815 How to update the firmware

5. Please wait for the process to count down from 150 seconds:



6. Once the firmware has completed the process, you will need to login again as per Step 1:

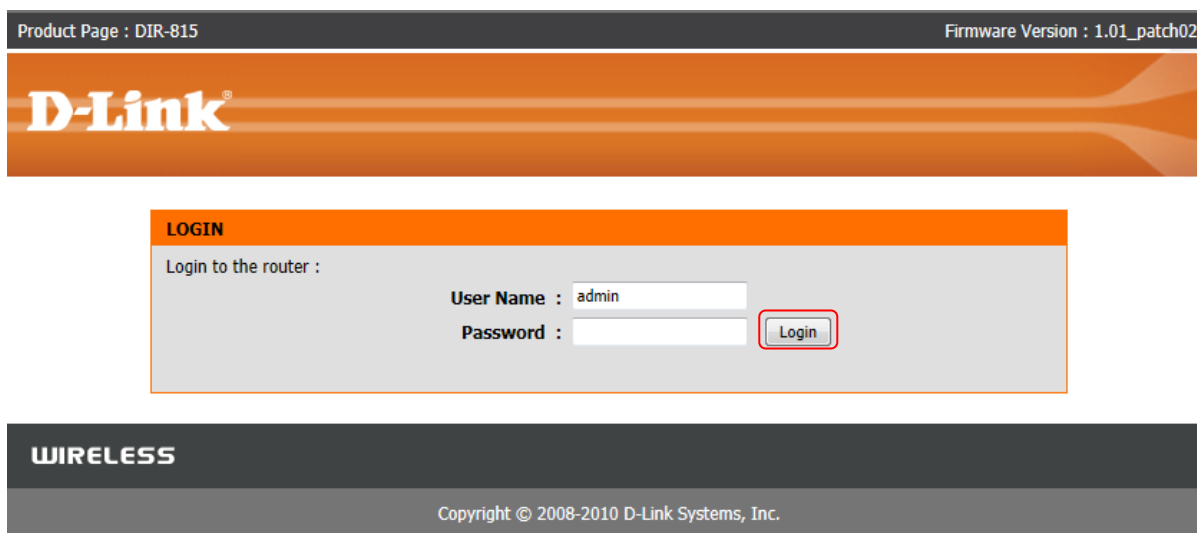

DIR-815 How to update the firmware

7. Click on the Tools menu again:

The screenshot shows the D-Link DIR-815 web interface. At the top, it says "Product Page : DIR-815" and "Firmware Version : 1.01_patch02". The D-Link logo is prominently displayed. Below the logo is a navigation bar with tabs for "DIR-815", "SETUP", "ADVANCED", "TOOLS" (which is highlighted with a red box), "STATUS", and "SUPPORT". On the left side, there is a vertical menu with options: ADMIN, TIME, SYSLOG, EMAIL SETTINGS, SYSTEM, FIRMWARE, DYNAMIC DNS, SYSTEM CHECK, and SCHEDULES. The main content area is titled "ADMINISTRATOR SETTINGS" and contains the following text: "The 'admin' account can access the management interface. The admin has read/write access and can change password. By default there is no password configured. It is highly recommended that you create a password to keep your router secure." Below this text are two buttons: "Save Settings" and "Don't Save Settings". The next section is "ADMIN PASSWORD" with the instruction "Please enter the same password into both boxes, for confirmation." It features two input fields labeled "Password :" and "Verify Password :". The final section is "ADMINISTRATION" with three checkboxes: "Enable Graphical Authentication", "Enable Remote Management", and "Remote Admin Port" with an input field. At the bottom of this section are "Save Settings" and "Don't Save Settings" buttons. On the right side, there is a "Helpful Hints..." section with a bullet point: "For security reasons, it is recommended that you change the password for the Admin account. Be sure to write down the new password to avoid having to reset the router in case they are forgotten."

8. Click on the System menu:

The screenshot shows the D-Link DIR-815 web interface. At the top, it says "Product Page : DIR-815" and "Firmware Version : 1.01_patch02". The D-Link logo is prominently displayed. Below the logo is a navigation bar with tabs for "DIR-815", "SETUP", "ADVANCED", "TOOLS", "STATUS", and "SUPPORT". On the left side, there is a vertical menu with options: ADMIN, TIME, SYSLOG, EMAIL SETTINGS, SYSTEM (which is highlighted with a red box), FIRMWARE, DYNAMIC DNS, SYSTEM CHECK, and SCHEDULES. The main content area is titled "SAVE AND RESTORE SETTINGS" and contains the following text: "Once the router is configured you can save the configuration settings to a configuration file on your hard drive. You also have the option to load configuration settings, or restore the factory default settings." Below this text are several options with buttons: "Save Settings To Local Hard Drive" with a "Save" button; "Load Settings From Local Hard Drive" with a "Browse..." button and an "Upload Settings" button; "Restore To Factory Default Settings" with a "Restore Device" button; "Reboot The Device" with a "Reboot the Device" button; and "Clear Language Pack" with a "Clear" button. On the right side, there is a "Helpful Hints..." section with a bullet point: "Once your router is configured the way you want it, you can save these settings to a configuration file that can later be loaded in the event that the router's default settings are restored. To do this, click the Save button next to where it says Save Settings to Local Hard Drive."

9. Now click on the Restore Factory Defaults button:

SAVE AND RESTORE SETTINGS

Save Settings To Local Hard Drive :
Load Settings From Local Hard Drive :

Restore To Factory Default Settings :
Reboot The Device :
Clear Language Pack :

11. Once the DIR-815 has rebooted with the Default Configuration applied please configure your DIR-815 to your networking requirements.