


DWR-116

Bigpond - 3G/4G Settings

Open an Internet Browser and in the address bar, type in <http://192.168.0.1>

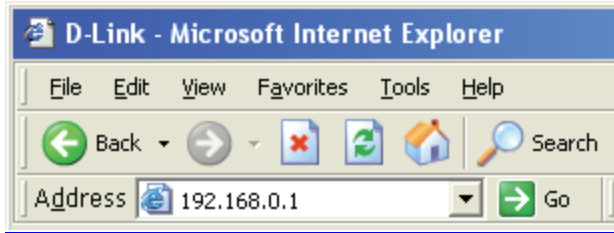

The default username is admin and the password is left blank.

LOGIN

Log in to the router:

User Name :

Password :

Select [Manual Internet Connection Setup] under [SETUP] > [INTERNET]

Product Page : DWR-116		Firmware Version : V1.00(AU)			
DWR-116	SETUP	ADVANCED	TOOLS	STATUS	SUPPORT
INTERNET	INTERNET CONNECTION				Helpful Hints.. <ul style="list-style-type: none">If you are new to networking and have never configured a router before, click on Internet Connection Setup Wizard and the router will guide you through a few simple steps to get your network up and running.If you consider yourself an advanced user and have configured a router before, click Manual Internet Connection Setup to Input all the settings manually. More...
WIRELESS SETTINGS	There are two ways to set up your Internet connection: you can use the Web-based Internet Connection Setup Wizard, or you can manually configure the connection.				
NETWORK SETTINGS	INTERNET CONNECTION SETUP WIZARD <p>If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your Router to the Internet, click on the button below.</p> <p><input type="button" value="Internet Connection Setup Wizard"/></p> <p>Note : Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p>				
LOGOUT	MANUAL INTERNET CONNECTION OPTIONS <p>If you would like to configure the Internet settings of your Router manually, then click on the button below.</p> <p><input type="button" value="Manual Internet Connection Setup"/></p>				
Internet Offline					
<input type="button" value="Reboot"/>					

- Select [4G LTE /3G] under INTERNET CONNECTION TYPE
 - Enter your Telstra Bigpond Username in the email format eg. xxxxx@bigpond.com
 - Enter your Telstra Bigpond Password
 - Dialed Number enter [*99#]
 - Authentication select [Auto]
 - APN is [telstra.bigpond] NOTE: it is case sensitive
 - Ping Code : [Some Bigpond SIMs requires a \[Level 2 PIN code\] also called \[PIN2 code\] from Bigpond in order to establish 3G/4G connection. You will need to contact Bigpond Support to locate this specific information.](#)
 - Reconnect Mode select [Auto]
 - Keep Alive choose [Use Ping]
 - Ping IP Address type in [8.8.8.8]
- Click on [Save Settings] button to apply the changes.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is 4G LTE /3G ▼

Failover Internet Type is Disable (N/A)

4G LTE /3G INTERNET CONNECTION TYPE

Enter the information provided by your Internet Service Provider (ISP).

Username : (optional)

Password : (optional)

Verify Password : (optional)

Dialed Number :

Authentication : Auto ▼

APN : x (optional)

Pin Code :

Reconnect Mode : Auto Manual

Maximum Idle Time : seconds

Primary DNS Server :

Secondary DNS Server :

Keep Alive : Disable Use Ping

Ping IP Address :

Ping Interval : seconds

Bridge ethernet ports : Enable

Some Bigpond SIMs requires a [Level 2] PIN code from Bigpond in order to establish 3G/4G connection. You will need to contact Bigpond Support to locate this specific information.

Save Settings
Don't Save Settings